BNSF Safety Vision

We believe every accident or injury is preventable. Our vision is that BNSF Railway will operate free of accidents and injuries. BNSF Railway will achieve this vision through:

A culture that makes safety our highest priority and provides continuous self-examination as to the effectiveness of our safety process and performance ...

A work environment, including the resources and tools, that is safe and accident-free where all known hazards will be eliminated or safe-guarded ...

Work practices and training for all employees that make safety essential to the tasks we perform ...

An empowered work force, including all employees, that takes responsibility for personal safety, the safety of fellow employees, and the communities in which we serve.



Northwest Division

Timetable No. 3

IN EFFECT AT 0700
Pacific Continental Time
Wednesday April 26, 2006

Division General Manager

Douglas B. Jones Seattle, WA (206) 625-6333

General Director Transportation

R.T. Bartoskewitz Seattle, WA (206) 625-6266



Division Managers

Bellingham	Seattle (continued)
A. FRANCO, JR Roadmaster (360) 922-1401	D.E. KAUTZMANN Road Foreman(206) 272-3620T.E. MARTIN
T.L. NIES	Asst. Terminal Supt (206) 272-3663
	R.J. MASON Terminal Trainmaster (206) 272-3743
Bend	S.B. PIERCE Terminal Manager (206) 272-3735
P.H. HJERTSTEDT Trainmaster	R.B. ROPER B&B Supervisor (206) 625-6295
P. TOLENTINO Roadmaster (541) 385-7539	T.N. ROWLEY Terminal Superintendent (206) 272-3719
Bingen	E.G. SENCENBAUGH Terminal Trainmaster (206) 272-3743
S.R. FREDERICK Roadmaster (509) 748-3204	J.A. STEVENSON General Road Foreman (206) 625-6414 A.W. STOKES Safety Manager (206) 625-6364
Bonner's Ferry	G.H. TOBOSA Terminal Trainmaster (206) 625-6391
A.K. OLSON Roadmaster (208) 267-6813	J.H. WILLIAMS Terminal Trainmaster
A.K. OLSON Roadmaster (206) 207-0013	E.J. WHITE Roadmaster (206) 625-6462
Centralia	Spolzana
G.A. GOWER Signal Supervisor (360) 330-2525	Spokane K.J. ABEYTA Roadmaster (509) 536-2205
Ellensburg	K.A. BEALER Terminal Trainmaster (509) 536-2492
A.C. VULGAS	D.W BLACK Terminal Trainmaster (509) 536-2492
. ,	E.A. BOUNOUS Division Engineer (509) 536-2252
Everett	S.A. BURKHART Terminal Trainmaster (509) 536-2492
M.J. BABIK Trainmaster (425) 304-6699	R.D. CARTWRIGHT Road Foreman(509) 536-2526
B. T. BELL	J.L. CHICKS
T.W. CHILCOAT	C.A. CHRIST
J.W. ELLSTROM Superintendent Operations (425) 304-6680 S.A. GORDON Terminal Manager (425) 304-6646	J.M. DEIBLER Terminal Trainmaster (509) 536-2492 P. G. GRAY Terminal Trainmaster (509) 536-2492
R.D. HACKNEY Terminal Trainmaster	J.L. HOLTEN Manager Signals (509) 536-2492
B.G. PARKS Terminal Trainmaster (425) 304-6635	D. W. KARLS Trainmaster
B.C. REILLY Terminal Trainmaster (425) 304-6635	B.J. McCLELLAN Terminal Trainmaster (509) 536-2492
R.A. STAFFORD Terminal Trainmaster (425) 304-6635	M.B. MYDLAND-DUNCAN Trainmaster(509) 536-2615
J.L. STROP Roadmaster (425) 304-6690	J.A. PINO Terminal Trainmaster (509) 536-2492
Klamath Falls	J.L. POTESTIO Asst. Roadmaster (509) 536-2480 R.H. PRICE Terminal Trainmaster (509) 536-2492
J.J. AHO Trainmaster (541) 880-5630	T.C. SIMMONS Terminal Manager (509) 536-2492
R.G. SEARERRoadmaster(541) 880-5639	M.M. TIMBERMAN Terminal Superintendent (509) 536-2224
	J.B. WHITACRE Mgr. Fueling Facility (208) 687-4668
Longview C.D. WDICHT Deadmoster (260) F70 (260)	Tacoma
C.D. WRIGHT Roadmaster	
	A. BOLDRA
Longview Jct.	J.D. COX Terminal Trainmaster (253) 591-2556
Longview Jct. B.K. BROWN Trainmaster	J.D. COX Terminal Trainmaster (253) 591-2556 K.A. ESTERBY Terminal Trainmaster (253) 591-2556 K.A. EVANS Terminal Trainmaster (253) 591-2556 S. KIPPERBERG B&B Supervisor (253) 591-2643
Longview Jct. B.K. BROWN Trainmaster (360) 578-2366 New Westminster, BC	J.D. COX Terminal Trainmaster (253) 591-2556 K.A. ESTERBY Terminal Trainmaster (253) 591-2556 K.A. EVANS Terminal Trainmaster (253) 591-2556 S. KIPPERBERG B&B Supervisor (253) 591-2643 W.G. LONNGREN Roadmaster (253) 591-2563
Longview Jct. B.K. BROWN Trainmaster	J.D. COX Terminal Trainmaster (253) 591-2556 K.A. ESTERBY Terminal Trainmaster (253) 591-2556 K.A. EVANS Terminal Trainmaster (253) 591-2556 S. KIPPERBERG B&B Supervisor (253) 591-2643 W.G. LONNGREN Roadmaster (253) 591-2563 J.R. NELSON Terminal Trainmaster (253) 591-2556
Longview Jct. B.K. BROWN Trainmaster (360) 578-2366 New Westminster, BC C. F. JONES Trainmaster (604) 520-5251 L. A. McCASIN Trainmaster (604) 520-5207	J.D. COX Terminal Trainmaster (253) 591-2556 K.A. ESTERBY Terminal Trainmaster (253) 591-2556 K.A. EVANS Terminal Trainmaster (253) 591-2556 S. KIPPERBERG B&B Supervisor (253) 591-2643 W.G. LONNGREN Roadmaster (253) 591-2563 J.R. NELSON Terminal Trainmaster (253) 591-2556 Terminal Trainmaster (253) 591-2556
Longview Jct. B.K. BROWN Trainmaster (360) 578-2366 New Westminster, BC C. F. JONES Trainmaster (604) 520-5251 L. A. McCASIN Trainmaster (604) 520-5207 Pasco	J.D. COX Terminal Trainmaster (253) 591-2556 K.A. ESTERBY Terminal Trainmaster (253) 591-2556 K.A. EVANS Terminal Trainmaster (253) 591-2556 S. KIPPERBERG B&B Supervisor (253) 591-2643 W.G. LONNGREN Roadmaster (253) 591-2563 J.R. NELSON Terminal Trainmaster (253) 591-2556 Terminal Trainmaster (253) 591-2556 Vancouver
Longview Jct. B.K. BROWN Trainmaster (360) 578-2366 New Westminster, BC C. F. JONES (604) 520-5251 L. A. McCASIN Trainmaster (604) 520-5207 Pasco W.C. ANGELOS Trainmaster (509) 546-3217	J.D. COX Terminal Trainmaster (253) 591-2556 K.A. ESTERBY Terminal Trainmaster (253) 591-2556 K.A. EVANS Terminal Trainmaster (253) 591-2556 S. KIPPERBERG B&B Supervisor (253) 591-2643 W.G. LONNGREN Roadmaster (253) 591-2563 J.R. NELSON Terminal Trainmaster (253) 591-2556 Terminal Trainmaster (253) 591-2556 Vancouver C.D. DELARGY Terminal Trainmaster (360) 418-6331
Longview Jct. B.K. BROWN	J.D. COX Terminal Trainmaster (253) 591-2556 K.A. ESTERBY Terminal Trainmaster (253) 591-2556 K.A. EVANS Terminal Trainmaster (253) 591-2556 S. KIPPERBERG B&B Supervisor (253) 591-2643 W.G. LONNGREN Roadmaster (253) 591-2563 J.R. NELSON Terminal Trainmaster (253) 591-2556 Terminal Trainmaster (253) 591-2556 Vancouver C.D. DELARGY Terminal Trainmaster (360) 418-6331 B.D. ELLER Terminal Trainmaster (360) 418-6331
Longview Jct. B.K. BROWN Trainmaster (360) 578-2366 New Westminster, BC (604) 520-5251 C. F. JONES Trainmaster (604) 520-5207 L. A. McCASIN Trainmaster (604) 520-5207 Pasco W.C. ANGELOS Trainmaster (509) 546-3217 R.W. BARTHOLOMEW Road Foreman (509) 546-3391 M.L. BELL Terminal Trainmaster (509) 546-3270	J.D. COX Terminal Trainmaster (253) 591-2556 K.A. ESTERBY Terminal Trainmaster (253) 591-2556 K.A. EVANS Terminal Trainmaster (253) 591-2556 S. KIPPERBERG B&B Supervisor (253) 591-2643 W.G. LONNGREN Roadmaster (253) 591-2563 J.R. NELSON Terminal Trainmaster (253) 591-2556 Terminal Trainmaster (253) 591-2556 Vancouver C.D. DELARGY Terminal Trainmaster (360) 418-6331 B.D. ELLER Terminal Trainmaster (360) 418-6331 G.L. GRAGG Road Foreman (360) 418-6286
Longview Jct. B.K. BROWN Trainmaster (360) 578-2366 New Westminster, BC C. F. JONES Trainmaster (604) 520-5251 L. A. McCASIN Trainmaster (604) 520-5207 Pasco W.C. ANGELOS Trainmaster (509) 546-3217 R.W. BARTHOLOMEW Road Foreman (509) 546-3391 M.L. BELL Terminal Trainmaster (509) 546-3270 B.G. GELLNER Terminal Trainmaster (509) 546-3270 F.K. GIBSON Roadmaster (509) 546-3290	J.D. COX Terminal Trainmaster (253) 591-2556 K.A. ESTERBY Terminal Trainmaster (253) 591-2556 K.A. EVANS Terminal Trainmaster (253) 591-2556 S. KIPPERBERG B&B Supervisor (253) 591-2643 W.G. LONNGREN Roadmaster (253) 591-2563 J.R. NELSON Terminal Trainmaster (253) 591-2556 Terminal Trainmaster (253) 591-2556 Vancouver C.D. DELARGY Terminal Trainmaster (360) 418-6331 B.D. ELLER Terminal Trainmaster (360) 418-6331 G.L. GRAGG Road Foreman (360) 418-6286 C.M. JAMES Terminal Trainmaster (360) 418-6331
Longview Jct. B.K. BROWN Trainmaster (360) 578-2366 New Westminster, BC C. F. JONES Trainmaster (604) 520-5251 L. A. McCASIN Trainmaster (604) 520-5207 Pasco W.C. ANGELOS Trainmaster (509) 546-3217 R.W. BARTHOLOMEW Road Foreman (509) 546-3391 M.L. BELL Terminal Trainmaster (509) 546-3270 B.G. GELLNER Terminal Trainmaster (509) 546-3270 F.K. GIBSON Roadmaster (509) 546-3290 D.A. HAYNES Signal Supervisor (509) 546-3278	J.D. COX Terminal Trainmaster (253) 591-2556 K.A. ESTERBY Terminal Trainmaster (253) 591-2556 K.A. EVANS Terminal Trainmaster (253) 591-2556 S. KIPPERBERG B&B Supervisor (253) 591-2643 W.G. LONNGREN Roadmaster (253) 591-2563 J.R. NELSON Terminal Trainmaster (253) 591-2556 Vancouver C.D. DELARGY Terminal Trainmaster (360) 418-6331 B.D. ELLER Terminal Trainmaster (360) 418-6331 G.L. GRAGG Road Foreman (360) 418-6331 K. KECK Terminal Trainmaster (360) 418-6331
Longview Jct. B.K. BROWN Trainmaster (360) 578-2366 New Westminster, BC C. F. JONES Trainmaster (604) 520-5251 L. A. McCASIN Trainmaster (604) 520-5207 Pasco W.C. ANGELOS Trainmaster (509) 546-3217 R.W. BARTHOLOMEW Road Foreman (509) 546-3391 M.L. BELL Terminal Trainmaster (509) 546-3270 B.G. GELLNER Terminal Trainmaster (509) 546-3270 F.K. GIBSON Roadmaster (509) 546-3290 D.A. HAYNES Signal Supervisor (509) 546-3278 G.L. HEIN Terminal Superintendent (509) 546-3252	J.D. COX Terminal Trainmaster (253) 591-2556 K.A. ESTERBY Terminal Trainmaster (253) 591-2556 K.A. EVANS Terminal Trainmaster (253) 591-2556 S. KIPPERBERG B&B Supervisor (253) 591-2643 W.G. LONNGREN Roadmaster (253) 591-2563 J.R. NELSON Terminal Trainmaster (253) 591-2556 Terminal Trainmaster (253) 591-2556 Vancouver C.D. DELARGY Terminal Trainmaster (360) 418-6331 B.D. ELLER Terminal Trainmaster (360) 418-6331 G.L. GRAGG Road Foreman (360) 418-6286 C.M. JAMES Terminal Trainmaster (360) 418-6331
Longview Jct. B.K. BROWN Trainmaster (360) 578-2366 New Westminster, BC C. F. JONES Trainmaster (604) 520-5251 L. A. McCASIN Trainmaster (604) 520-5207 Pasco W.C. ANGELOS Trainmaster (509) 546-3217 R.W. BARTHOLOMEW Road Foreman (509) 546-3270 B.G. GELLNER Terminal Trainmaster (509) 546-3270 F.K. GIBSON Roadmaster (509) 546-3290 D.A. HAYNES Signal Supervisor (509) 546-3278 G.L. HEIN Terminal Superintendent (509) 546-3252 J.T. LABBERTON Terminal Manager (509) 546-3219	J.D. COX Terminal Trainmaster (253) 591-2556 K.A. ESTERBY Terminal Trainmaster (253) 591-2556 K.A. EVANS Terminal Trainmaster (253) 591-2556 S. KIPPERBERG B&B Supervisor (253) 591-2563 W.G. LONNGREN Roadmaster (253) 591-2563 J.R. NELSON Terminal Trainmaster (253) 591-2556 Vancouver C.D. DELARGY Terminal Trainmaster (360) 418-6331 B.D. ELLER Terminal Trainmaster (360) 418-6331 G.L. GRAGG Road Foreman (360) 418-6331 K. KECK Terminal Trainmaster (360) 418-6331 K. KECK Terminal Trainmaster (360) 418-6331 T.L. KEENE Terminal Manager (360) 418-6429
Longview Jct. B.K. BROWN Trainmaster (360) 578-2366 New Westminster, BC C. F. JONES Trainmaster (604) 520-5251 L. A. McCASIN Trainmaster (604) 520-5207 Pasco W.C. ANGELOS Trainmaster (509) 546-3217 R.W. BARTHOLOMEW Road Foreman (509) 546-3391 M.L. BELL Terminal Trainmaster (509) 546-3270 B.G. GELLNER Terminal Trainmaster (509) 546-3270 F.K. GIBSON Roadmaster (509) 546-3290 D.A. HAYNES Signal Supervisor (509) 546-3278 G.L. HEIN Terminal Superintendent (509) 546-3252 J.T. LABBERTON Terminal Manager (509) 546-3219 L.R. LUNCEFORD Terminal Trainmaster (509) 546-3270	J.D. COX Terminal Trainmaster (253) 591-2556 K.A. ESTERBY Terminal Trainmaster (253) 591-2556 K.A. EVANS Terminal Trainmaster (253) 591-2556 S. KIPPERBERG B&B Supervisor (253) 591-2643 W.G. LONNGREN Roadmaster (253) 591-2563 J.R. NELSON Terminal Trainmaster (253) 591-2556 Vancouver C.D. DELARGY Terminal Trainmaster (360) 418-6331 B.D. ELLER Terminal Trainmaster (360) 418-6331 G.L. GRAGG Road Foreman (360) 418-6331 K. KECK Terminal Trainmaster (360) 418-6331 T.L. KEENE Terminal Manager (360) 418-6429 T.W. KOERTING Division Engineer (360) 418-6331 D.P. MANSON Terminal Trainmaster (360) 418-6331
Longview Jct. B.K. BROWN Trainmaster (360) 578-2366 New Westminster, BC C. F. JONES Trainmaster (604) 520-5251 L. A. McCASIN Trainmaster (604) 520-5207 Pasco W.C. ANGELOS Trainmaster (509) 546-3217 R.W. BARTHOLOMEW Road Foreman (509) 546-3270 B.G. GELLNER Terminal Trainmaster (509) 546-3270 F.K. GIBSON Roadmaster (509) 546-3290 D.A. HAYNES Signal Supervisor (509) 546-3278 G.L. HEIN Terminal Superintendent (509) 546-3252 J.T. LABBERTON Terminal Manager (509) 546-3219	J.D. COX Terminal Trainmaster (253) 591-2556 K.A. ESTERBY Terminal Trainmaster (253) 591-2556 K.A. EVANS Terminal Trainmaster (253) 591-2556 S. KIPPERBERG B&B Supervisor (253) 591-2643 W.G. LONNGREN Roadmaster (253) 591-2563 J.R. NELSON Terminal Trainmaster (253) 591-2556 Vancouver C.D. DELARGY Terminal Trainmaster (360) 418-6331 B.D. ELLER Terminal Trainmaster (360) 418-6331 G.L. GRAGG Road Foreman (360) 418-6331 K. KECK Terminal Trainmaster (360) 418-6331 T.L. KEENE Terminal Manager (360) 418-6321 T.W. KOERTING Division Engineer (360) 418-6331 D.P. MANSON Terminal Trainmaster (360) 418-6331 S.R. MATZDORFF Road Foreman (360) 418-6322
Longview Jct. B.K. BROWN Trainmaster (360) 578-2366 New Westminster, BC C. F. JONES Trainmaster (604) 520-5251 L. A. McCASIN Trainmaster (604) 520-5207 Pasco W.C. ANGELOS Trainmaster (509) 546-3217 R.W. BARTHOLOMEW Road Foreman (509) 546-3391 M.L. BELL Terminal Trainmaster (509) 546-3270 B.G. GELLNER Terminal Trainmaster (509) 546-3270 F.K. GIBSON Roadmaster (509) 546-3290 D.A. HAYNES Signal Supervisor (509) 546-3278 G.L. HEIN Terminal Superintendent (509) 546-3279 J.T. LABBERTON Terminal Manager (509) 546-3219 L.R. LUNCEFORD Terminal Trainmaster (509) 546-3270 D. MARTIN Signal Supervisor (509) 546-3246	J.D. COX Terminal Trainmaster (253) 591-2556 K.A. ESTERBY Terminal Trainmaster (253) 591-2556 K.A. EVANS Terminal Trainmaster (253) 591-2556 S. KIPPERBERG B&B Supervisor (253) 591-2643 W.G. LONNGREN Roadmaster (253) 591-2563 J.R. NELSON Terminal Trainmaster (253) 591-2556 Vancouver C.D. DELARGY Terminal Trainmaster (360) 418-6331 B.D. ELLER Terminal Trainmaster (360) 418-6331 G.L. GRAGG Road Foreman (360) 418-6331 K. KECK Terminal Trainmaster (360) 418-6331 T.L. KEENE Terminal Manager (360) 418-6429 T.W. KOERTING Division Engineer (360) 418-6331 D.P. MANSON Terminal Trainmaster (360) 418-6331 D.P. MANSON Terminal Trainmaster (360) 418-6331 S.R. MATZDORFF Road Foreman (360) 418-6222 D.L. MESFORD Mgr. Roadway Planning (360) 418-6297
Longview Jct. B.K. BROWN Trainmaster (360) 578-2366 New Westminster, BC C. F. JONES Trainmaster (604) 520-5251 L. A. McCASIN Trainmaster (604) 520-5207 Pasco W.C. ANGELOS Trainmaster (509) 546-3217 R.W. BARTHOLOMEW Road Foreman (509) 546-3391 M.L. BELL Terminal Trainmaster (509) 546-3270 B.G. GELLNER Terminal Trainmaster (509) 546-3270 F.K. GIBSON Roadmaster (509) 546-3270 D.A. HAYNES Signal Supervisor (509) 546-3278 G.L. HEIN Terminal Superintendent (509) 546-3252 J.T. LABBERTON Terminal Manager (509) 546-3219 L.R. LUNCEFORD Terminal Trainmaster (509) 546-3270 D. MARTIN Signal Supervisor (509) 546-3270 S.L. SWEETWOOD Terminal Trainmaster (509) 546-3270 S.W. WEBB Terminal Trainmaster (509) 546-3270	J.D. COX Terminal Trainmaster (253) 591-2556 K.A. ESTERBY Terminal Trainmaster (253) 591-2556 K.A. EVANS Terminal Trainmaster (253) 591-2556 S. KIPPERBERG B&B Supervisor (253) 591-2563 J.R. NELSON Terminal Trainmaster (253) 591-2563 J.R. NELSON Terminal Trainmaster (253) 591-2556 Vancouver C.D. DELARGY Terminal Trainmaster (360) 418-6331 B.D. ELLER Terminal Trainmaster (360) 418-6331 G.L. GRAGG Road Foreman (360) 418-6331 K. KECK Terminal Trainmaster (360) 418-6331 T.L. KEENE Terminal Manager (360) 418-6429 T.W. KOERTING Division Engineer (360) 418-6331 D.P. MANSON Terminal Trainmaster (360) 418-6331 S.R. MATZDORFF Road Foreman (360) 418-6222 D.L. MESFORD Mgr. Roadway Planning (360) 418-6324
Longview Jct. B.K. BROWN Trainmaster (360) 578-2366 New Westminster, BC C. F. JONES Trainmaster (604) 520-5251 L. A. McCASIN Trainmaster (604) 520-5207 Pasco W.C. ANGELOS Trainmaster (509) 546-3217 R.W. BARTHOLOMEW Road Foreman (509) 546-3391 M.L. BELL Terminal Trainmaster (509) 546-3270 B.G. GELLNER Terminal Trainmaster (509) 546-3270 F.K. GIBSON Roadmaster (509) 546-3270 D.A. HAYNES Signal Supervisor (509) 546-3278 G.L. HEIN Terminal Superintendent (509) 546-3278 J.T. LABBERTON Terminal Manager (509) 546-3219 L.R. LUNCEFORD Terminal Trainmaster (509) 546-3270 D. MARTIN Signal Supervisor (509) 546-3270 S.W. WEBB Terminal Trainmaster (509) 546-3270 Quincy	J.D. COX Terminal Trainmaster (253) 591-2556 K.A. ESTERBY Terminal Trainmaster (253) 591-2556 K.A. EVANS Terminal Trainmaster (253) 591-2556 S. KIPPERBERG B&B Supervisor (253) 591-2563 W.G. LONNGREN Roadmaster (253) 591-2563 J.R. NELSON Terminal Trainmaster (253) 591-2556 Vancouver C.D. DELARGY Terminal Trainmaster (360) 418-6331 B.D. ELLER Terminal Trainmaster (360) 418-6331 G.L. GRAGG Road Foreman (360) 418-6331 K. KECK Terminal Trainmaster (360) 418-6331 T.L. KEENE Terminal Manager (360) 418-6331 T.L. KEENE Terminal Trainmaster (360) 418-6331 D.P. MANSON Terminal Trainmaster (360) 418-6331 D.P. MANSON Terminal Trainmaster (360) 418-6322 D.L MESFORD Mgr. Roadway Planning (360) 418-6222 D.L MESFORD Mgr. Roadway Planning (360) 418-6324 D.S. NESS Terminal Supterintendent (360) 418-6377
Longview Jct. B.K. BROWN Trainmaster (360) 578-2366 New Westminster, BC C. F. JONES Trainmaster (604) 520-5251 L. A. McCASIN Trainmaster (604) 520-5207 Pasco W.C. ANGELOS Trainmaster (509) 546-3217 R.W. BARTHOLOMEW Road Foreman (509) 546-3391 M.L. BELL Terminal Trainmaster (509) 546-3270 B.G. GELLNER Terminal Trainmaster (509) 546-3270 F.K. GIBSON Roadmaster (509) 546-3270 D.A. HAYNES Signal Supervisor (509) 546-3278 G.L. HEIN Terminal Superintendent (509) 546-3252 J.T. LABBERTON Terminal Manager (509) 546-3219 L.R. LUNCEFORD Terminal Trainmaster (509) 546-3270 S.L. SWEETWOOD Terminal Trainmaster (509) 546-3270 S.W. WEBB Terminal Trainmaster (509) 546-3270 Quincy G.E. MIRTS Road Foreman (209) 460-6402	J.D. COX Terminal Trainmaster (253) 591-2556 K.A. ESTERBY Terminal Trainmaster (253) 591-2556 K.A. EVANS Terminal Trainmaster (253) 591-2556 S. KIPPERBERG B&B Supervisor (253) 591-2563 J.R. NELSON Terminal Trainmaster (253) 591-2563 J.R. NELSON Terminal Trainmaster (253) 591-2556 Vancouver C.D. DELARGY Terminal Trainmaster (360) 418-6331 B.D. ELLER Terminal Trainmaster (360) 418-6331 G.L. GRAGG Road Foreman (360) 418-6331 K. KECK Terminal Trainmaster (360) 418-6331 T.L. KEENE Terminal Manager (360) 418-6429 T.W. KOERTING Division Engineer (360) 418-6331 D.P. MANSON Terminal Trainmaster (360) 418-6331 S.R. MATZDORFF Road Foreman (360) 418-6222 D.L. MESFORD Mgr. Roadway Planning (360) 418-6324
Longview Jct. B.K. BROWN Trainmaster (360) 578-2366 New Westminster, BC C. F. JONES Trainmaster (604) 520-5251 L. A. McCASIN Trainmaster (604) 520-5207 Pasco W.C. ANGELOS Trainmaster (509) 546-3217 R.W. BARTHOLOMEW Road Foreman (509) 546-3217 B.G. GELLNER Terminal Trainmaster (509) 546-3270 F.K. GIBSON Roadmaster (509) 546-3270 F.K. GIBSON Roadmaster (509) 546-3278 G.L. HEIN Terminal Supervisor (509) 546-3278 G.L. HEIN Terminal Manager (509) 546-3252 J.T. LABBERTON Terminal Manager (509) 546-3270 D. MARTIN Signal Supervisor (509) 546-3270 S.L. SWEETWOOD Terminal Trainmaster (509) 546-3270 S.W. WEBB Terminal Trainmaster (509) 546-3270 Quincy G.E. MIRTS Road Foreman (209) 460-6402 Seattle	J.D. COX Terminal Trainmaster (253) 591-2556 K.A. ESTERBY Terminal Trainmaster (253) 591-2556 K.A. EVANS Terminal Trainmaster (253) 591-2556 S. KIPPERBERG B&B Supervisor (253) 591-2643 W.G. LONNGREN Roadmaster (253) 591-2563 J.R. NELSON Terminal Trainmaster (253) 591-2556 Vancouver C.D. DELARGY Terminal Trainmaster (360) 418-6331 B.D. ELLER Terminal Trainmaster (360) 418-6331 G.L. GRAGG Road Foreman (360) 418-6331 K. KECK Terminal Trainmaster (360) 418-6331 T.L. KEENE Terminal Manager (360) 418-6331 T.L. KEENE Terminal Trainmaster (360) 418-6429 T.W. KOERTING Division Engineer (360) 418-6331 D.P. MANSON Terminal Trainmaster (360) 418-6331 S.R. MATZDORFF Road Foreman (360) 418-6331 S.R. MATZDORFF Road Foreman (360) 418-6322 D.L. MESFORD Mgr. Roadway Planning (360) 418-6324 N.
Longview Jct. B.K. BROWN Trainmaster (360) 578-2366 New Westminster, BC C. F. JONES Trainmaster (604) 520-5251 L. A. McCASIN Trainmaster (604) 520-5207 Pasco W.C. ANGELOS Trainmaster (509) 546-3217 R.W. BARTHOLOMEW Road Foreman (509) 546-3270 B.G. GELLNER Terminal Trainmaster (509) 546-3270 F.K. GIBSON Roadmaster (509) 546-3270 F.K. GIBSON Roadmaster (509) 546-3270 G.L. HEIN Terminal Supervisor (509) 546-3278 G.L. HEIN Terminal Manager (509) 546-3219 L.R. LUNCEFORD Terminal Trainmaster (509) 546-3270 D. MARTIN Signal Supervisor (509) 546-3270 S.W. WEBB Terminal Trainmaster (509) 546-3270 Quincy G.E. MIRTS Road Foreman (209) 460-6402 Seattle J.M. ABBY Manager Signals (206) 625-6231	J.D. COX Terminal Trainmaster (253) 591-2556 K.A. ESTERBY Terminal Trainmaster (253) 591-2556 K.A. EVANS Terminal Trainmaster (253) 591-2556 S. KIPPERBERG B&B Supervisor (253) 591-2563 W.G. LONNGREN Roadmaster (253) 591-2563 J.R. NELSON Terminal Trainmaster (253) 591-2556 Vancouver C.D. DELARGY Terminal Trainmaster (360) 418-6331 B.D. ELLER Terminal Trainmaster (360) 418-6331 G.L. GRAGG Road Foreman (360) 418-6331 K. KECK Terminal Trainmaster (360) 418-6331 K. KECK Terminal Trainmaster (360) 418-6331 T.L. KEENE Terminal Manager (360) 418-6331 T.L. KEENE Terminal Trainmaster (360) 418-6331 D.P. MANSON Terminal Trainmaster (360) 418-6331 S.R. MATZDORFF Road Foreman (360) 418-6331 S.R. MATZDORFF Road Foreman (360) 418-6322 D.L. MESFORD Mgr. Roadway Planning (360) 418-6324 D.S.
Longview Jct. B.K. BROWN Trainmaster (360) 578-2366 New Westminster, BC C. F. JONES Trainmaster (604) 520-5251 L. A. McCASIN Trainmaster (604) 520-5207 Pasco W.C. ANGELOS Trainmaster (509) 546-3217 R.W. BARTHOLOMEW Road Foreman (509) 546-3217 B.G. GELLNER Terminal Trainmaster (509) 546-3270 B.G. GELLNER Terminal Trainmaster (509) 546-3270 F.K. GIBSON Roadmaster (509) 546-3278 G.L. HEIN Terminal Supervisor (509) 546-3278 G.L. HEIN Terminal Manager (509) 546-3219 L.R. LUNCEFORD Terminal Trainmaster (509) 546-3270 D. MARTIN Signal Supervisor (509) 546-3270 S.W. WEBB Terminal Trainmaster (509) 546-3270 S.W. WEBB Terminal Trainmaster (509) 546-3270 Quincy G.E. MIRTS Road Foreman (209) 460-6402 Seattle J.M. ABBY Manager Signals (206) 625-6231 J. Albinger Mgr., Commuter Oper (206) 625-6091	J.D. COX Terminal Trainmaster (253) 591-2556 K.A. ESTERBY Terminal Trainmaster (253) 591-2556 K.A. EVANS Terminal Trainmaster (253) 591-2556 S. KIPPERBERG B&B Supervisor (253) 591-2563 W.G. LONNGREN Roadmaster (253) 591-2563 J.R. NELSON Terminal Trainmaster (253) 591-2556 Vancouver C.D. DELARGY Terminal Trainmaster (360) 418-6331 B.D. ELLER Terminal Trainmaster (360) 418-6331 G.L. GRAGG Road Foreman (360) 418-6331 K. KECK Terminal Trainmaster (360) 418-6331 K. KECK Terminal Trainmaster (360) 418-6331 T.L. KEENE Terminal Manager (360) 418-6321 T.W. KOERTING Division Engineer (360) 418-6331 D.P. MANSON Terminal Trainmaster (360) 418-6331 S.P. MANSON Terminal Trainmaster (360) 418-6321 D.L MESFORD Mgr. Roadway Planning (360) 418-6322 D.L MESFORD Mgr. Roadway Planning (360) 418-6324
Longview Jct. B.K. BROWN Trainmaster (360) 578-2366 New Westminster, BC C. F. JONES Trainmaster (604) 520-5251 L. A. McCASIN Trainmaster (604) 520-5207 Pasco W.C. ANGELOS Trainmaster (509) 546-3217 R.W. BARTHOLOMEW Road Foreman (509) 546-3391 M.L. BELL Terminal Trainmaster (509) 546-3270 B.G. GELLNER Terminal Trainmaster (509) 546-3270 F.K. GIBSON Roadmaster (509) 546-3278 G.L. HEIN Terminal Supervisor (509) 546-3278 G.L. HEIN Terminal Manager (509) 546-3279 D. MARTIN Signal Supervisor (509) 546-3270 D. MARTIN Signal Supervisor (509) 546-3270 S.W. WEBB Terminal Trainmaster (509) 546-3270 S.W. WEBB Terminal Trainmaster (509) 546-3270 Quincy G.E. MIRTS Road Foreman (209) 460-6402 Seattle J. ALBINGER Mgr., Commuter Oper. (206) 625-6231 J. ALBINGER Division Engineer (206) 625-6339	J.D. COX Terminal Trainmaster (253) 591-2556 K.A. ESTERBY Terminal Trainmaster (253) 591-2556 K.A. EVANS Terminal Trainmaster (253) 591-2556 S. KIPPERBERG B&B Supervisor (253) 591-2563 J.R. NELSON Roadmaster (253) 591-2563 J.R. NELSON Terminal Trainmaster (253) 591-2556 Vancouver C.D. DELARGY Terminal Trainmaster (360) 418-6331 B.D. ELLER Terminal Trainmaster (360) 418-6331 G.L. GRAGG Road Foreman (360) 418-6331 K. KECK Terminal Trainmaster (360) 418-6331 K. KECK Terminal Trainmaster (360) 418-6331 T.L. KEENE Terminal Manager (360) 418-6331 T.L. KEENE Terminal Trainmaster (360) 418-6331 D.P. MANSON Terminal Trainmaster (360) 418-6331 S.R. MATZDORFF Road Foreman (360) 418-6322 D.L. MESFORD Mgr. Roadway Planning (360) 418-6324 D.S. NESS Terminal Supterintendent (360) 418-6324
Longview Jct. B.K. BROWN Trainmaster (360) 578-2366 New Westminster, BC C. F. JONES Trainmaster (604) 520-5251 L. A. McCASIN Trainmaster (604) 520-5207 Pasco W.C. ANGELOS Trainmaster (509) 546-3217 R.W. BARTHOLOMEW Road Foreman (509) 546-3391 M.L. BELL Terminal Trainmaster (509) 546-3270 B.G. GELLNER Terminal Trainmaster (509) 546-3270 F.K. GIBSON Roadmaster (509) 546-3270 D.A. HAYNES Signal Supervisor (509) 546-3278 G.L. HEIN Terminal Superintendent (509) 546-3252 J.T. LABBERTON Terminal Manager (509) 546-3270 D. MARTIN Signal Supervisor (509) 546-3270 S.L. SWEETWOOD Terminal Trainmaster (509) 546-3270 S.W. WEBB Terminal Trainmaster (509) 546-3270 Quincy G.E. MIRTS Road Foreman (209) 460-6402 Seattle J. ALBINGER Mgr., Commuter Oper (206) 625-6231 J. ALBINGER Mgr., Commuter Oper (20	J.D. COX Terminal Trainmaster (253) 591-2556 K.A. ESTERBY Terminal Trainmaster (253) 591-2556 K.A. EVANS Terminal Trainmaster (253) 591-2556 S. KIPPERBERG B&B Supervisor (253) 591-2563 W.G. LONNGREN Roadmaster (253) 591-2563 J.R. NELSON Terminal Trainmaster (253) 591-2556 Vancouver C.D. DELARGY Terminal Trainmaster (360) 418-6331 B.D. ELLER Terminal Trainmaster (360) 418-6331 G.L. GRAGG Road Foreman (360) 418-6331 K. KECK Terminal Trainmaster (360) 418-6331 K. KECK Terminal Trainmaster (360) 418-6331 T.L. KEENE Terminal Manager (360) 418-6321 T.W. KOERTING Division Engineer (360) 418-6331 D.P. MANSON Terminal Trainmaster (360) 418-6331 S.P. MANSON Terminal Trainmaster (360) 418-6321 D.L MESFORD Mgr. Roadway Planning (360) 418-6322 D.L MESFORD Mgr. Roadway Planning (360) 418-6324
Longview Jct. B.K. BROWN Trainmaster (360) 578-2366 New Westminster, BC C. F. JONES Trainmaster (604) 520-5251 L. A. McCASIN Trainmaster (604) 520-5207 Pasco W.C. ANGELOS Trainmaster (509) 546-3217 R.W. BARTHOLOMEW Road Foreman (509) 546-3391 M.L. BELL Terminal Trainmaster (509) 546-3270 B.G. GELLNER Terminal Trainmaster (509) 546-3270 F.K. GIBSON Roadmaster (509) 546-3270 D.A. HAYNES Signal Supervisor (509) 546-3278 G.L. HEIN Terminal Superintendent (509) 546-3278 G.L. HEIN Terminal Manager (509) 546-3270 D. MARTIN Signal Supervisor (509) 546-3270 D. MARTIN Signal Supervisor (509) 546-3270 S.W. WEBB Terminal Trainmaster (509) 546-3270 S.W. WEBB Terminal Trainmaster (509) 546-3270 Quincy G.E. MIRTS Road Foreman (209) 460-6402 Seattle J. ALBINGER Mgr., Commuter Oper (206) 625-6231 J. ALBINGER Mgr., Commuter	J.D. COX Terminal Trainmaster (253) 591-2556 K.A. ESTERBY Terminal Trainmaster (253) 591-2556 K.A. EVANS Terminal Trainmaster (253) 591-2556 S. KIPPERBERG B&B Supervisor (253) 591-2563 J.R. NELSON Roadmaster (253) 591-2563 J.R. NELSON Terminal Trainmaster (253) 591-2556 Vancouver C.D. DELARGY Terminal Trainmaster (360) 418-6331 B.D. ELLER Terminal Trainmaster (360) 418-6331 G.L. GRAGG Road Foreman (360) 418-6331 K. KECK Terminal Trainmaster (360) 418-6331 K. KECK Terminal Trainmaster (360) 418-6331 T.L. KEENE Terminal Manager (360) 418-6321 T.W. KOERTING Division Engineer (360) 418-6331 B.W. LYTLE Terminal Trainmaster (360) 418-6331 S.P. MANSON Terminal Trainmaster (360) 418-6331 S.R. MATZDORFF Road Foreman (360) 418-6322 D.L. MESFORD Mgr. Roadway Planning (360) 418-6324 D.S
Longview Jct. B.K. BROWN Trainmaster (360) 578-2366 New Westminster, BC C. F. JONES Trainmaster (604) 520-5251 L. A. McCASIN Trainmaster (604) 520-5207 Pasco W.C. ANGELOS Trainmaster (509) 546-3217 R.W. BARTHOLOMEW Road Foreman (509) 546-3391 M.L. BELL Terminal Trainmaster (509) 546-3270 B.G. GELLNER Terminal Trainmaster (509) 546-3270 F.K. GIBSON Roadmaster (509) 546-3270 D.A. HAYNES Signal Supervisor (509) 546-3278 G.L. HEIN Terminal Superintendent (509) 546-3252 J.T. LABBERTON Terminal Manager (509) 546-3270 D. MARTIN Signal Supervisor (509) 546-3270 S.L. SWEETWOOD Terminal Trainmaster (509) 546-3270 S.W. WEBB Terminal Trainmaster (509) 546-3270 Quincy G.E. MIRTS Road Foreman (209) 460-6402 Seattle J. ALBINGER Mgr., Commuter Oper (206) 625-6231 J. ALBINGER Mgr., Commuter Oper (20	J.D. COX Terminal Trainmaster (253) 591-2556 K.A. ESTERBY Terminal Trainmaster (253) 591-2556 K.A. EVANS Terminal Trainmaster (253) 591-2566 S. KIPPERBERG B&B Supervisor (253) 591-2563 W.G. LONNGREN Roadmaster (253) 591-2563 J.R. NELSON Terminal Trainmaster (253) 591-2556 Vancouver C.D. DELARGY Terminal Trainmaster (360) 418-6331 B.D. ELLER Terminal Trainmaster (360) 418-6331 G.L. GRAGG Road Foreman (360) 418-6331 K. KECK Terminal Trainmaster (360) 418-6331 T.L. KEENE Terminal Manager (360) 418-6331 T.L. KEENE Terminal Manager (360) 418-6331 D.P. MANSON Terminal Trainmaster (360) 418-6331 D.P. MANSON Terminal Trainmaster (360) 418-6331 D.P. MASFORD Mgr. Roadway Planning (360) 418-6322 D.L. MESFORD Mgr. Roadway Planning (360) 418-6322 D.L. MESFORD Ngr. Roadway Planning (360) 418-6321
Longview Jct. B.K. BROWN Trainmaster (360) 578-2366 New Westminster, BC C. F. JONES Trainmaster (604) 520-5251 L. A. McCASIN Trainmaster (604) 520-5207 Pasco W.C. ANGELOS Trainmaster (509) 546-3217 R.W. BARTHOLOMEW Road Foreman (509) 546-3270 B.G. GELLNER Terminal Trainmaster (509) 546-3270 F.K. GIBSON Roadmaster (509) 546-3270 F.K. GIBSON Roadmaster (509) 546-3270 F.K. GIBSON Roadmaster (509) 546-3270 F.K. GIBSON Terminal Supervisor (509) 546-3270 J.A. HAYNES Signal Supervisor (509) 546-3252 J.T. LABBERTON Terminal Manager (509) 546-3219 L.R. LUNCEFORD Terminal Trainmaster (509) 546-3270 D. MARTIN Signal Supervisor (509) 546-3270 S.W. WEBB Terminal Trainmaster (509) 546-3270 Quincy G.E. MIRTS Road Foreman (206) 625-6231 J. ALBINGER Mgr., Commuter Oper (206) 625-6339	J.D. COX
Longview Jct.	J.D. COX Terminal Trainmaster (253) 591-2556 K.A. ESTERBY Terminal Trainmaster (253) 591-2556 K.A. EVANS Terminal Trainmaster (253) 591-2556 S. KIPPERBERG B&B Supervisor (253) 591-2643 W.G. LONNGREN Roadmaster (253) 591-2563 J.R. NELSON Terminal Trainmaster (253) 591-2556 Vancouver C.D. DELARGY Terminal Trainmaster (360) 418-6331 B.D. ELLER Terminal Trainmaster (360) 418-6331 G.L. GRAGG Road Foreman (360) 418-6331 K. KECK Terminal Trainmaster (360) 418-6331 K. KECK Terminal Manager (360) 418-6331 T.L. KEENE Terminal Manager (360) 418-6331 D.P. MANSON Terminal Trainmaster (360) 418-6331 D.P. MANSON Terminal Trainmaster (360) 418-6331 S.R. MATZDORFF Road Foreman (360) 418-6322 D.L. MESFORD Mgr. Roadway Planning (360) 418-6324 D.S. NESS Terminal Supterintendent (360) 418-6312 J
Longview Jct	J.D. COX Terminal Trainmaster (253) 591-2556 K.A. ESTERBY Terminal Trainmaster (253) 591-2556 K.A. EVANS Terminal Trainmaster (253) 591-2556 S. KIPPERBERG B&B Supervisor (253) 591-2643 W.G. LONNGREN Roadmaster (253) 591-2563 J.R. NELSON Terminal Trainmaster (253) 591-2563 J.R. NELSON Terminal Trainmaster (253) 591-2566 Terminal Trainmaster (253) 591-2556 Terminal Trainmaster (253) 591-2556 Vancouver C.D. DELARGY Terminal Trainmaster (360) 418-6331 B.D. ELLER Terminal Trainmaster (360) 418-6331 G.L. GRAGG Road Foreman (360) 418-6331 K. KECK Terminal Trainmaster (360) 418-6331 K. KECK Terminal Trainmaster (360) 418-6331 T.L. KEENE Terminal Manager (360) 418-6429 T.W. KOERTING Division Engineer (360) 418-6331 D.P. MANSON Terminal Trainmaster (360) 418-6331 D.P. MANSON Terminal Trainmaster (360) 418-6331 S.R. MATZDORFF Road Foreman (360) 418-6321 D.P. MESFORD Mgr. Roadway Planning (360) 418-6222 D.L. MESFORD Mgr. Roadway Planning (360) 418-6322 D.S. NESS Terminal Supterintendent (360) 418-6324 D.S. NESS Terminal Supterintendent (360) 418-6312 J.L. RIPPLINGER Asst. Roadmaster (360) 418-6321 Wenatchee G.R. BELL Road Foreman (509) 664-2248 J.Z. LI Signal Supervisor (509) 664-2248 J.Z. LI Signal Supervisor (509) 664-2246 Wishram G.A. FILCHER Trainmaster (509) 748-3203 Yakima
Longview Jct.	J.D. COX Terminal Trainmaster (253) 591-2556 K.A. ESTERBY Terminal Trainmaster (253) 591-2556 K.A. EVANS Terminal Trainmaster (253) 591-2556 S. KIPPERBERG B&B Supervisor (253) 591-2643 W.G. LONNGREN Roadmaster (253) 591-2563 J.R. NELSON Terminal Trainmaster (253) 591-2556 Vancouver C.D. DELARGY Terminal Trainmaster (360) 418-6331 B.D. ELLER Terminal Trainmaster (360) 418-6331 G.L. GRAGG Road Foreman (360) 418-6331 K. KECK Terminal Trainmaster (360) 418-6331 K. KECK Terminal Manager (360) 418-6331 T.L. KEENE Terminal Manager (360) 418-6331 D.P. MANSON Terminal Trainmaster (360) 418-6331 D.P. MANSON Terminal Trainmaster (360) 418-6331 S.R. MATZDORFF Road Foreman (360) 418-6322 D.L. MESFORD Mgr. Roadway Planning (360) 418-6324 D.S. NESS Terminal Supterintendent (360) 418-6312 J

NORTHWEST DIVISION—No. 3—April 26, 2006—Bellingham Subdivision

SOUTHWARD	Length of Siding (Feet)	Station Nos.	Mile Post	Bellingham Subdivision MAIN LINE STATIONS	Rule 4.3	Type of Oper.	Line Segment	Miles to Next Stn.	↑ NORTHWAR
+			119.6	USA CANADA BORDER	Υ	ABS		0.3	D
	6,060	15088	119.3	BLAINE	BY	ocs		2.4	
	8,588		116.4	SWIFT				4.3	
		15081	112.1	INTALCO	JT	СТС		5.9	
	8,478	15075	106.3	FERNDALE				9.0	
		15067	97.0	BELLINGHAM	BY	ABS OCS		3.2	
	6,347	15062	92.9	SOUTH BELLINGHAM	Υ	003	50	13.4	
	8,884	15049	79.7	BOW				7.4	
	4,635	15042	71.9	BURLINGTON to Fidalgo 12.4	J			3.9	
	6,075	15038	66.8	MT. VERNON	В			12.4	
	6,381	15025	55.5	STANWOOD		CTC		9.7	
	10,680	15016	45.5	ENGLISH				3.6	
		15012	42.2	KRUSE JCT. to Arlington 6.9				3.4	
	2,557	15009	38.8	MARYSVILLE				2.7	
			37.0 10.9	DELTA JCT.	BMTY			1.8	
		15005	9.1	DELTA	Υ	ABS	408	1.9	
		02165	0.0	PA JCT.	JY		407	97.4	

Radio Channel No. 76 in service.

Bayside Yard at Everett is assigned Channel 14. All Bayside switch jobs and yardmasters will operate on this channel. Yardmaster will monitor Channel 66 and Seattle North Branch Channel 76. Delta Yard will operate on Channel 60.

Radio Call-In				
Everett - 37(X)	Burlington - 38(X)	Bellingham - 39(X)		
Blaine - 41(X)	Seattle North Branch Disp Stanwood - 65(X			
	Emergency - Call 911			
Dispr X=0, Mechani	cal X=2, Field Support >	K=3, Warm Bearing X=5		

Train Dispatcher Telephone Number—8-234-1607

Speed Regulations

1(A), Speed—Maximum

	Passenger	Freignt
MP 119.6 to MP 37.0	79 MPH	60 MPH.
MP 10.9 to MP 0.0	35 MPH	15 MPH.
Amtrak Talgo Trains	50 MPH.	
MP 8.10 to MP 8.20	35 MPH	25 MPH.
Loaded Coal Trains		40 MPH.
Delta Jct. to Everett Jct. via Bayside	15 MPH	15 MPH.
Lowell to Sea Line Jct		10 MPH.

1(B). Speed—Permanent Restrictions

MP 119.6 to MP 118.2	50 MPH	30 MPH.
MP 118.2 to MP 108.7	79 MPH	60 MPH.
MP 108.7 to MP 108.3	70 MPH	50 MPH.
MP 108.3 to MP 106.2	79 MPH	60 MPH.
MP 106.2 to MP 105.8	45 MPH	40 MPH.
MP 105.8 to MP 103.4	70 MPH	50 MPH.
MP 103.4 to MP 101.1	55 MPH	50 MPH.
MP 101.1 to MP 100.2	40 MPH	35 MPH.
MP 100.2 to MP 97.1	45 MPH	35 MPH.
MP 97.1 to MP 96.7	20 MPH	20 MPH.
MP 96.7 to MP 93.6	35 MPH	30 MPH.
MP 93.6 to MP 90.45	40 MPH	35 MPH.
MP 90.45 to MP 88.3	45 MPH	35 MPH.
MP 88.3 to MP 87.2	40 MPH	35 MPH.
MP 87.2 to MP 85.1	45 MPH	35 MPH.
MP 85.1 to MP 82.5	40 MPH	35 MPH.

	Passenger Freight
MP 82.5 to MP 76.7	79 MPH 60 MPH.
MP 76.7 to MP 76.5	60 MPH 55 MPH.
MP 76.5 to MP 74.8	79 MPH 55 MPH.
MP 74.8 to MP 74.5	45 MPH 40 MPH.
MP 74.5 to MP 70.4	
MP 70.4 to MP 67.9	50 MPH 45 MPH.
MP 67.9 to MP 51.0	
MP 51.0 to MP 49.5	
MP 49.5 to MP 48.9	
MP 48.9 to MP 47.9	
MP 47.9 to MP 41.0	
MP 41.0 to MP 38.7	
MP 38.7 to MP 37.7	
MP 37.7 to MP 37.2	
MP 37.2 to MP 37.0	
MP 10.9 to MP 10.7	
MP 10.7 to MP 8.2	
MP 8.2 to MP 8.1	
MP 8.1 to MP 7.9	
MP 0.8 to MP 0.0	30 MPH 15 MPH.
Bellingham—over street crossings (HER)	
MP 96.2—Pine Street crossing	20 MPH 20 MPH.
Burlington to Fidalgo	
Kruse Jct. to Arlington	
Delta Roundhouse/Rip Tracks	5 MPH.
AmtrakTalgoTrain Maximum Speeds	Passenger
MP 119.6 to MP 118.2	50 MPH.
MP 118.2 to MP 106.2	79 MPH.
MP 106.2 to MP 105.8	45 MPH.
MP 105.8 to MP 103.4	
MP 103.4 to MP 101.1	
MP 101.1 to MP 100.2	
MP 100.2 to MP 97.1	
MP 97.1 to MP 96.7	
MP 96.7 to MP 93.6	
MP 93.6 to MP 90.5	
MP 90.5 to MP 88.3	
MP 88.3 to MP 87.2	40 MPH.

MP 87.2 to MP 85.1 45 MPH. MP 85.1 to MP 82.5 40 MPH. MP 82.5 to MP 76.7 79 MPH. MP 76.7 to MP 76.5 67 MPH. MP 76.5 to MP 74.8 79 MPH. MP 74.8 to MP 74.5 50 MPH. MP 74.5 to MP 70.4 79 MPH. MP 70.4 to MP 67.9 50 MPH. MP 67.9 to MP 51.0 79 MPH. MP 51.0 to MP 49.5 70 MPH.

MP 49.5 to MP 48.9 67 MPH.

MP 48.9 to MP 41.0 79 MPH. MP 41.0 to MP 38.7 50 MPH.

MP 38.7 to MP 37.7 30 MPH. MP 37.7 to MP 37.2 40 MPH.

Passenger

Freight

- (/-	 	

MP 37.2 10 MP 37.0 10 MPn.
MP 10.9 to MP 10.7 10 MPH.
MP 10.7 to MP 8.2 42 MPH.
MP 8.2 to MP 8.1
MP 8.1 to MP 7.9 35 MPH.
MP 0.8 to MP 0.0 30 MPH
1(C). Speed—Switches and Turnouts
Through dual control turnouts at the following locations:

MD 27 2 to MD 27 0

outs

e following locations: Swift, Ferndale, Bow, and English 30 MPH. 30 MPH.

Trains over 100 TOB must not exceed 25 MPH through turnouts shown to exceed that speed.

1(D). Speed-Other

Sidings: Swift, Ferndale, Bow, and English	30 MPH	30 MPH.
Siding: Mt Vernon	20 MPH	20 MPH.
All other sidings	10 MPH	10 MPH.
Through turnout on G.P. Pulp Switch Track # 3302		5 MPH.
Bridges 105.8, 99.1, cars heavier		
than 138 tons	25 MPH	25 MPH.

Temperature Restrictions

When Ambient temperature exceeds 85 degrees Fahrenheit, maximum speeds for trains are 60 MPH passenger, 50 MPH freight. In addition, trains exceeding 100 TOB must not exceed 35 MPH.

See Item 1 of the System Special Instructions for additional speed restrictions.

2. Bridge and Equipment Weight Restrictions Maximum Gross Weight of Car

USA Canada Border to PA Jct	143	tons,	Restriction D)
Burlington to MP 13	143	tons,	Restriction D)
MP 13 to Fidalgo	134	tons,	Restriction 6	à
Kruse Jct. to Arlington	143	tons,	Restriction D)

Everett—Six-axle locomotives not permitted on Mill A Track 104 or on Kimberly Clark Tracks 220 through 229.

Mt. Vernon—Cenex Spur MP 68.71 only two 4 axle locomotives permitted.

Arlington Spur—Six-axle locomotives in excess of 175 tons and six-axle derricks not permitted beyond MP 1.0X.

Burlington to Fidalgo—Six-axle locomotives and six-axle derricks not permitted.

3. Type of Operation

CTC—in effect:

MP 116.8 to MP 98.7 MP 93.5 to MP 37.0

ABS-in effect:

MP 119.6 to MP 116.8

MP 98.7 to MP 93.5

MP 10.5 to MP 0.0

Rule 9.15—in effect:

Bridge 37 and Delta Jct

Yard Limits—in effect:

MP 119.6 to MP 116.8 MP 98.7 to MP 93.5

MP 10.5 to MP 0.0

Occupancy Control System—in effect:

MP 119.6 to MP 116.8

MP 98.7 to MP 93.5

Trains and engines may occupy the main track with verbal OCS permission. See System Special Instructions, Item 14, Rule 18.0 Occupancy Control System (OCS).

Interlockings and Drawbridges Not Indicated at Station Drawbridge 37.0—1.7 miles south of Marysville—manual

interlocking.

Drawbridge 37.8—1.2 miles south of Marysville—manual interlocking.

Drawbridge 38.3—0.5 miles south of Marysville—manual interlocking

When interlocking signals display Stop indication, bridge operator, B&B foreman or signal maintainer must be called to inspect bridge equipment before trains are permitted to proceed over these bridges. After the inspection has been completed, the inspector will notify the control operator. When the control operator has given authority to proceed, Train must proceed per GCOR Rule 6.27.

Drawbridge 7.6Z on Anacortes branch—2.0 miles west of Whitney—Drawbridge.

After stopping at stop sign, trains or engines must not proceed until permission is received from bridgetender.

Drawbridges 37.8, 38.3—Maintenance of Way employees must obtain authority to occupy manual interlockings from the Train Dispatcher.

4. General Code of Operating Rules Items

Rule 6.19—When flagging is required, distance will be 2.0 miles.

Rule 6.28—The following areas are industrial tracks and Rule 6.28 is in effect:

- Delta Jct., Bayside, to Everett Jct.
- Sea Line Jct. to Lowell MP 6.4
- · Delta Jct., Delta to GN Jct.
- Kruse Jct. MP 0.0X to Arlington MP 6.9X
- Burlington MP 16.6Z to Fidalgo MP 4.2Z

Rule 7.7—Dropping cars is permitted Bellingham Yard Track 3707 to Waterfront Tracks.

Rule 10.2—Following switches not equipped with electric locks:

MP 38.69—South siding switch Marysville

MP 39.19—North siding switch Marysville

MP 43.2—Pacific Grinding Wheel Spur

MP 49.8—Industry Track Silvana

MP 62.3—Conway Feed Spur

MP 62.5—Pole Yard Spur

MP 68.7—Mt. Vernon Terminal Railroad Interchange

MP 68.71—Mt. Vernon Skagit Farmers/Cenex Spur

MP 71.32—South switch Gravel Track Burlington

MP 71.85-North switch Gravel Track Burlington

MP 93.2—Spur Track South Bellingham

MP 102.1—Noranda Spur

MP 110.94—South Switch Custer

MP 112.12-North Switch Custer

Rule 15.1—Trains operating between Blaine and PA Jct. must receive track warrant prior to departure from USA/Canada border or Delta Jct. Trains originating in Canada must receive track warrant prior to departure from New Westminster.

5. Trackside Warning Detectors (TWD)

A. Protecting bridges, tunnels or other structures

MP 46.2—DED—NWD—Recall Code 408

MP 55.2—DED—SWD—Recall Code 387

MP 67.4—DED—NWD—Recall Code 407

MP 74.6—DED—SWD—Recall Code 389

B. Other TWD locations

MP 40.7—DED—Recall Code 378—Exception Reporting

MP 46.2—DED—SWD—Recall Code 408

MP 55.2—DED—NWD—Recall Code 387

MP 58.9—Recall Code 388

MP 67.4—DED—SWD—Recall Code 407

MP 74.6—DED—NWD—Recall Code 389

MP 81.9—Recall Code 398

MP 95.1—Recall Code 397

MP 110.5—Recall Code 418

6. FRA Excepted Track

Everett—Track 316 (Scale Track) Bayside Track 1414 Delta, Tracks 1901-1912 (Rip Track/ Roundhouse), Tracks 1921-1922 (WFE).

MP 0.0X Kruse Jct. to MP 6.9X Arlington.

Stanwood—Twin City Food Spur, North Star Industries. MP 68.7—Mt. Vernon Terminal Railroad Interchange. Bellingham—Orchard Street Lead, Cement Track Lead.

7. Special Conditions

Blaine - White Rock—Trains will not pass USA Canada Border without permission of Customs and Immigration inspectors. Effective December 31, 2006 anyone entering the US from Canada via air or water must have a passport. Effective December 31, 2007 anyone entering the US from Canada by land must have a passport.

Blaine and Swift-US and Canadian Customs are inspecting both Northbound and Southbound box car equipment for unauthorized or illegal passengers. Any box car equipment with doors opened or partially opened, or closed but not sealed will have to be inspected. BNSF has contracted Border Cargo Services (BCS) of Blaine, Washington to open and close equipment for Customs. BCS will inspect both sides of train looking for unauthorized or illegal passengers and will close and seal car doors. BCS will perform these inspections at Swift. Trains will be inspected on main or siding at Swift. BCS will notify the North Branch Dispatcher that they will be working on the train and ask for blocking to be provided. Dispatcher will block track and record information. Dispatcher will respond to BCS that the siding or main has been blocked and BCS will then Blue Flag both ends of train along with Blue Light on the engineer's control stand. Once inspection is complete, Blue Flags and Blue Light will be removed and BCS will notify the North Branch Dispatcher time blue flags were removed and train is released.

Northward Trains at Blaine and Swift—All Northward Trains operating on the New Westminster Subdivision:

- Northward Trains will call the New Westminster RTC dispatcher, and have the Daily Operating Bulletins faxed to them at Seattle, Swift or Everett, at Delta Yard.
- Northward Trains, at initial on duty point, the Conductor will obtain, complete, and fax the Canada Customs Rail Crew Report to the clerks at Swift before departure. Fax number is 888-800-5539.
- When a Northbound is ready to depart Swift the Conductor will contact the New Westminster RTC and obtain a Warrant for Main Track Authority.
- Northward Trains when ready to depart Swift, will contact Clerks at Swift, and obtain instructions on proceeding through VACIS system.
- Southward trains will call Swift and obtain permission to proceed from USA/Canada border to Swift for inspection and instructions on proceeding through VACIS system.
- 6. 5 MPH is required through the VACIS inspection system. The Vehicle and Cargo Inspection System, [VACIS], is in service at Swift, MP116.85. This is an x-ray machine used to inspect unoccupied rail equipment and cargo; it is operated by the United States Custom Service. Information regarding health hazards, and exposure levels, can be obtained from the BNSF clerks at Swift.

Ferndale—Loaded or empty LPG cars must not be left adjacent to high school.

Bellingham—All trains approaching "F" Street crossing on track 3704, 3705 or 3701 must stop at the stop sign and wait for the crossing to activate and the gates to assume the fully lowered position before entering the crossing. Due to the intertie with the traffic signals, there is a 10 second delay of crossing activation after the approach is occupied.

Before leaving cars unattended, be sure both the north and south end of the track is secure.

Burlington—If Burlington South is at Stop (Rule 9.1.15) the approach signal (74.6) to Burlington North, MP 72.4, will be yellow (Rule 9.1.8) and Burlington North will be yellow (Rule 9.1.8) for southbound trains.

At Burlington South MP 69.9, a second northbound head is added and displays a red over lunar (Rule 9.1.13) and a red over red (9.1.15) aspect.

Whitney—All train, engine and switching movements on the siding crossing the LaConner to Whitney Road must be protected by a flagman on the ground at the crossing.

Stanwood—At Wolfkill Feed, do not run locomotive over auger.

Edgecomb—MP 3.85X normal position for hand throw switch at west siding is lined for movement to the siding. Switch target displays Stop when switch is lined for the main track.

Stop signs are located on main track approaching 172nd Street. Trains are required to stop, and may proceed after lights are flashing and gates are down.

Arlington Branch, MP 6.75X Public Crossing—Trains must stop at the stop signs and ensure the lights are flashing a minimum of 20 seconds and the gates are fully lowered before proceeding over the crossing.

Marysville—From MP 37 to MP 38 the distance is 9,946 feet.

Delta Yard—The Kimberly Clark Log Dump Track 503 has close clearance on the south side of the track at loading ramp.

Close Clearance—May exist on all auxiliary tracks.

Double-Stack Equipment—Trains handling double-stack equipment between Bow and Blaine must have containers in bottom well only. Containers are restricted to single level loading only.

EXCEPTION: Rabanco containers 48 feet long, 9 feet high, gray in color, number series RABU 480291 through 480848, RABU 482331and RABU 482530 may be double stacked.

Identifying Signals—In signaled territory, when a train is passing a signal displaying other than "Clear" in advance of a control point, a crew member must transmit the following by radio:

Train Identification (Initials, Engine Number and Direction) Signal Name - In advance of (Control Point Location), on (Track) at (Speed) MPH.

Example of transmission:

"BNSF 6301 South approach medium in advance of Napavine South on Main 1 at 50 MPH (on single track main track designation is not necessary).

Train Inspections—A member of the inbound crew on a through train operating cabooseless will give the outbound train a roll-by inspection and advise the outbound crew of the condition of the train, unless the outbound crew will not be immediately available or the inbound crew is otherwise relieved of duties.

Loaded Coal Trains—Loaded coal trains to Bellingham Subdivision must move via Bayside Yard when practicable.

Flash Flood Warnings—Refer to Item 33, System Special Instructions. The following locations on this subdivision have been identified as "critical areas".

MP 49.0 to MP 63.0 MP 70.0 Bridge MP 75.63 Bridge MP 83.0 to MP 93.0 MP 104.0 to MP 105.0

Automatic Equipment Identification Locations

Everett—MP 38.6 Bellingham—MP 79.1 Bellingham—MP 100.3 Blaine—MP 119.3

Remote Control Operations—Remote Control

Operations—Signs located at MP 0.0 and MP 37.5 including the manual interlocking limits of Delta Jct. designate the Remote Control Area at Delta Yard.

Signs located at MP 32.0 and MP 36.0 designate the Remote Control Area at Bayside Yard.

8. Line Segments

Yard Line Segments

Line Segment Limits

603 Bellingham 616 Bellingham Yard and Runaround

399 Bellingham Ex-Milw. trackage to MP 4.9

604 Bayside Yard

605 Delta Yard 50 Everett Jct.


Bayside/Delta Jct. .. MP 32.1 to MP 37.1

Road Line Segments

ine	Segment	Limits	Mileposts
	429	Stanwood—Twin City Food Spur	0.0 to 2.4
	50	USA Canada Border to Delta Jct.	
	409	Burlington to Fidalgo	
	406	Arlington to Kruse Jct.	
	408	Delta Jct. to Lowell	
	407	Sea Line Jct. to PA Jct.	

9. Locations Not Shown as Stations

Name		Miles - Location	Capacity Cars	Switch Opens
15080	Custer	5.5 north of Ferndale	49	Both
15069	Noranda	4.1 south of Ferndale	11	South
Rabanco	o Spur	2.1 south of Ferndale	12	North
15053	Samish	3.8 north of Bow	55	Both
15041	MVB Station	1.4 north of Mt. Vernon	2	North
15032	Fir	5.3 south of Mt. Vernon	20	South
15025	Twin City Food (on Spur)	2.4 west of Stanwood	Yard	South
15020	Silvana	5.5 south of Stanwood	8	South
15013	Pacific Grinding Wheel	1.0 north of Kruse Jct.	15	North
66020	Edgecomb (on Spur)	3.8 east of Kruse Jct.	44	Both
66207	Whitney (on Spur)	7.0 west of Burlington	10	Both
66210	Whitmarsh (on Spur)	10.2 west of Burlington	10	Both
66212	Fidalgo (on Spur)	12.4 west of Burlington	24	Both
Bayside		2.4 south of Delta Jct.	Yard	Both

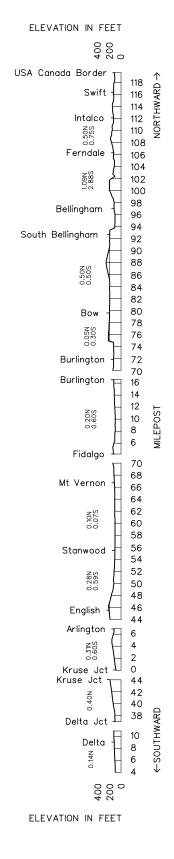

NORTHWEST DIVISION—No. 3—April 26, 2006—Burbank Subdivision

WESTWARD.→	Length of Siding (Feet)	Station Nos.	Mile Post	Burbank Subdivision BRANCH LINE STATIONS	Rule 4.3	Type of Oper.	Line Segment	Miles to Next Stn.	♠ EASTWARD
•		64869	65.3	RIPARIA	TY			74.1	-
	BETWEEN RIPARIA AND VILLARD JCT., UNION PACIFIC RULES AND TIMETABLE GOVERN.								
		64106	5.7	VILLARD JCT.	J		450	2.1	
		64104	4.0	BURBANK		Rule 6.28	450	1.2	1
		12142	2.7	AINSWORTH JCT.			47	77.4	1

Radio Channel No. 89 in service.

Pasco Control Operator

(509) 546-3244, Fax (509) 546-3318

Emergency Train Dispatcher—Call 911

UPRR Dispatcher Phone Numbers:

402-636-1710 - Weekdays 402-636-1709 - Weekends

1. Speed Regulations

1(A). Speed-Maximum

 Freight

 MP 5.7 to MP 2.7
 20 MPH.

1(B). Speed—Permanent Restrictions

MP 3.0 to MP 2.7 10 MPH.

1(C). Speed—Switches and Turnouts—None

1(D). Speed—Other

See Item 1 of the System Special Instructions for additional speed restrictions.

2. Bridge and Equipment Weight Restrictions Maximum Gross Weight of Car

Cars in excess of 134 tons are not permitted on the Burbank Industrial Lead.

3. Type of Operation

Interlockings and Drawbridges Not Indicated at Station

The following instructions apply at the Snake River Bridge 3 Drawspan automatic interlocking:

Trains, hy-rail inspection vehicles, or motor cars must not enter the 75-foot approach circuits to the drawspan, nor may the bridge be lowered by maintenance personnel until permission is obtained from the Pasco Control Operator. Permission must not be requested until the movement is ready to occupy the bridge.

After train crews obtain permission, they will:

- Occupy the 75-foot approach circuit with the lead engine for twelve (12) minutes.
- 2. When the bridge lowers and the absolute signal aspect indicates proceed, they may cross the bridge.
- 3. Notify the Pasco Control Operator when the caboose, last car, or light engine is clear of the bridge.

If the bridge does not lower after twelve (12) minutes, unlock the case marked "Train Crew Case", and follow the instructions posted in the case.

After hy-rail vehicles, on-track machinery, and motor cars obtain permission they will open the case marked "M/W Case", and follow the instructions posted in the case.

4. General Code of Operating Rules Items

Rule 6.19—When flagging is required, the distance will be 1.5 miles

Rule 6.28—Rule 6.28 is in effect MP 5.7 to MP 2.7 and on the Martindale Industrial Lead at Ainsworth, MP 233.2 to End of Track

5. Trackside Warning Detectors (TWD)—None

6. FRA Excepted Track

At Burbank, MP 4.1, the lead off the main track including all industry tracks. In addition, the 5 MPH speed signs which are posted in isolated areas are subject to vandalism. Train crews not familiar with these speed sign locations must not exceed 5 MPH on all tracks, especially the Columbia Basin Steel tracks due to extreme track curvature.

7. Special Conditions

Villard Jct. to Pasco—Trains must not occupy the industrial track between Pasco and Villard Jct. without the permission of the Pasco operator.

Villard Jct.—Signals governing the movement of trains over the dual control switch at Villard Jct. are controlled by the Union Pacific control operator.

Ainsworth Jct.—The normal position of the Ainsworth Jct. switch is lined for East Pasco.

Close Clearance—May exist on all auxiliary tracks.

8. Line Segments

Yard Line Segments

_ine	Segment	Limits	
------	---------	--------	--

435 Riparia

471	Pasco Hum
630	Pasco
631	Pasco WFF


Road Line Segments

Line Segment Limits

450 Villard Jct. to Ainsworth Jct. 47 Ainsworth Jct. to Pasco

9. Locations Not Shown as Stations

Name	Miles - Location	Capacity	Switch Opens
64112 Attalia	6.3 east of Villard Jct.	Yard	Both
64113 Wallula	7.3 east of Villard Jct.	Yard	Both
12140 East Pasco	2.3 east of Ainsworth Jct.		



WESTWARD.	Length of Siding (Feet)	Station Nos.	Mile Post	Cherry Point Subdivision BRANCH LINE STATIONS	Rule 4.3	Type of Oper.	Line Segment	Miles to Next Stn.	↑ EASTWARD
*	(1 001)	15081	1.8	INTALCO	JT	Rule 6.28	cogmon	3.3	٦
		66604	5.1	ARCO		TWC	418	0.8	
		66606	5.9	ELLIOTT		Rule 6.28	410	3.0	
		66608	8.9	CHERRY POINT		0.20		8.9	

Radio Channel No. 76 in service.

	Radio Call-In			
Everett - 37(X)	Burlington - 38(X)	Bellingham - 39(X)		
Blaine - 41(X)				
Emergency - Call 911				
Dispr X=0, Mechanical X=2, Field Support X=3, Warm Bearing X=5				

Train Dispatcher Telephone Number—8-234-1607

1. Speed Regulations

1(A). Speed—Maximum

1(B). Speed—Permanent Restrictions

1(C). Speed—Switches and Turnouts—None

1(D). Speed-Other

See Item 1 of the System Special Instructions for additional speed restrictions.

2. Bridge and Equipment Weight Restrictions

Maximum Gross Weight of Car

Six-axle locomotives and six-axle derricks not permitted on Arco Lead.

3. Type of Operation

TWC—in effect:

MP 1.8 to MP 5.1

4. General Code of Operating Rules Items

Rule 6.19—When flagging is required, distance will be 1.5 miles.

Rule 6.28—Rule 6.28 is in effect from MP 0.0 to MP 1.8 on both legs of the Intalco Wye and from MP 5.1 to MP 8.9.

- 5. Trackside Warning Detectors (TWD)—None
- 6. FRA Excepted Track—None
- 7. Special Conditions

Close Clearance—May exist on all auxiliary tracks.


8. Line Segments

Road Line Segments

Line Segments Limits

418 Intalco to Cherry Point

9. Locations Not Shown as Stations—None



0 NORTHWEST DIVISION—No. 3—April 26, 2006—Coeur d'Alene Subdivision

WESTWARD.	Length of Siding (Feet)	Station Nos.	Mile Post	Coeur d'Alene Subdivision BRANCH LINE STATIONS	Rule 4.3	Type of Oper.	Line Segment	Miles to Next Stn.	♠ EASTWARD
		62713	12.6	COEUR d'ALENE	Т		381	8.1	
		32705	4.1	POST FALLS		TWC		1.9	
		82702	2.3	GRAND JCT.	U	TVVC		2.3	
		01850	0.0	HAUSER JCT.	JT			12.3	

Radio Channel No. 66 in service. UPRR Channel 42-42, UPRR Call-Up *16

Train Dispatcher Phone Numbers

(817) 234-1609, Fax (817) 234-1610

UPRR dispatcher phone number: 402-636-1710 - Weekdays 402-636-1709 - Weekends

Emergency Train Dispatcher—Call 911 (Channel 76)

1. Speed Regulations

1(A). Speed-Maximum

 MP 12.6 to MP 0.0
 Freight

 MP 12.6 to MP 0.0
 10 MPH.

- 1(B). Speed—Permanent Restrictions—None
- 1(C). Speed—Switches and Turnouts—None

1(D). Speed—Other

On sidings 10 MPH

See Item 1 of the System Special Instructions for additional speed restrictions.

2. Bridge and Equipment Weight Restrictions Maximum Gross Weight of Car

Coeur d'Alene to Hauser Jct. 134 tons, Restriction G

Six-axle locomotives and derricks not permitted.

3. Type of Operation

TWC-in effect:

Coeur d'Alene MP 12.6 to Hauser Jct MP 0.0

Trains and Maintenance of Way personnel operating between Coeur d'Alene MP 12.6 to Hauser Jct. MP 0.0 must receive track warrant from Boyer West dispatcher.

4. General Code of Operating Rules Items

Rule 6.19—When flagging is required, distance will be 0.5 mile.

5. Trackside Warning Detectors (TWD)—None

6. FRA Excepted Track

Coeur d'Alene MP 12.6 to Huetter MP 8.3

7. Special Conditions

Coeur d'Alene—Switching movement from west leg of wye will only be made to the main track.

When departing Coeur d' Alene for Spokane, a member of the train or engine crew will attempt to call the UPRR Dispatcher and advise that their train is departing Coeur d' Alene for Spokane and furnish the UPRR dispatcher with an estimated time of arrival at Grand Jct.

The L NWE8461 will be servicing both the UPRR and BNSF tracks at Stimson Lumber Mill. The crew of the L NWE8461 will coordinate this service with Stimson Lumber personnel. The base plan is to service both UP and BNSF sides of the mill on

Tuesdays and Thursdays and only the BNSF side on Mondays, Wednesdays, and Fridays. A Saturday Coeur d' Alene switch may be necessary to ensure adequate service during month-end peaks. The UP Industrial Lead to the Stimson Mill will be accessed at Gibbs and a caboose will be used only as an exterior riding platform to protect movement to the UP dock. The Stimson Mill phone number is 208-765-1414, fax 208-765-5045.

Post Falls—When serving Potlatch, inspect all loading dock doors to ensure that they are all the way up and in the clear prior to both entering and exiting with cars and/or locomotives. Uncouple and position cars to clear the interior overhead door, allowing 2 feet of space between the ends of the cars and the path of the overhead door. In addition, any BNSF personnel not involved in train service to the Potlatch facility must contact Potlatch personnel prior to performing any work on facility grounds (e.g. Carmen repairing cars, etc.).

Note: Only four 60 foot cars will fit inside the buildings: 3 cars in the south end and 1 car in the north. Take note of all signs within the Potlatch facility to help facilitate safety and the proper spotting of cars.

Gibbs—Do not use the flat track as a switching lead for the UP transfer track. Switch the UP transfer track from the west end.

Hauser Jct.—When departing Hauser Jct. for Coeur d' Alene, a member of the train or engine crew will attempt to call the UPRR Dispatcher and advise that their train is departing Hauser Jct. for Coeur d' Alene and furnish the UPRR dispatcher with an estimated time of arrival at Grand Jct.

8. Line Segments


Road Line Segments

Line Segment Limits

381 Coeur d'Alene to Hauser Jct.

9. Locations Not Shown as Stations

Name Miles - Location		Capacity Cars	Switch Opens
62626 Huetter	7.7 east of Hauser Jct.	40	Both
62629 Atlas	8.4 east of Hauser Jct.	30	Both
62630 Gibbs	10.5 east of Hauser Jct.	12	Both



WESTWARD.	Length of Siding (Feet)	Station Nos.	Mile Post	Columbia River Subdivision MAIN LINE STATIONS	Rule 4.3	Type of Oper.	Line Segment	Miles to Next Stn.	↑ EASTWARD											
		01878	1481.6	LATAH JCT.	J			7.8												
	7,442	01883	1489.8	LYONS				9.5												
	6,930	01893	1499.3	ESPANOLA		СТС		12.2												
	7,532	01905	1510.8	EDWALL				9.1												
		01914	1520.2	BLUESTEM				7.5												
		01922	1527.7	HARRINGTON	Х	DT ABS		15.1												
		01937	1542.9	LAMONA				10.2												
	9,232	01947	1553.2	ODESSA				12.5												
	9,552	01959	1565.6	GIBSON				10.4												
	8,794	01970	1577.0	WILSON CREEK			37	13.1												
	10,794	01983	1588.6	ADRIAN				10.0												
		01993	1599.3	EPHRATA]]					0.70	0.70	0.70		5.1	
	10,360	01998	1603.8	NAYLOR		СТС		11.2												
	10,398	02009	1615.5	QUINCY				10.8												
	7,856	02020	1626.6	TRINIDAD				9.3												
	8,154	02030	1635.0	ALBUS				5.6												
		02035	1640.1	ROCK ISLAND				3.3												
	8,370	02038	1643.3	MALAGA				6.9												
		02044	1650.2	WENATCHEE	BJY	ABS		169.6												

Radio Channel No. 66 in service.

Radio Channel No. 70 in service (Wenatchee Yard)

Radio Call-In					
Lyons - 19(X)	Edwall - 20(X)	Lamona - 21(X)			
Marlin - 24(X)	Wilson Creek - 25(X)	Ephrata - 26(X)			
Wenatchee East - 27(X)	Wenatchee Yard - 54(X)	Trinidad - 51(X)			
Emergency - Call 911					
Dispr X=0, Mechanical X=2, Field Support X=3, Warm Bearing X=5					

Train Dispatcher Phone Numbers

(817) 234-1615, Fax (817) 234-1616 Monday through Friday 0700-1500 PST—(817) 234-1649, Fax (817) 234-1616

1. Speed Regulations

1(A). Speed-Maximum

	Passenger	Freight
MP 1481.6 to MP 1650.2	79 MPH	60 MPH.

Exception to System Special Instructions, Item 1, Speed Restrictions: Trains consisting entirely of loaded double stack equipment may operate at 60 MPH if not exceeding 105 TOB.

1(B). Speed—Permanent Restrictions

MP 1481.6 to MP 1483.3 30 MPH 30 MPH.
MP 1483.3 to MP 1488.6 55 MPH 45 MPH.
MP 1488.6 to MP 1489.2 40 MPH 35 MPH.
MP 1489.2 to MP 1490.4 70 MPH 50 MPH.
MP 1494.8 to MP 1498.0 65 MPH.
MP 1508.8 to MP 1513.7 65 MPH.
MP 1513.7 to MP 1516.8 55 MPH 50 MPH.
MP 1516.8 to MP 1520.5 50 MPH 50 MPH.
MP 1520.5 to MP 1522.7 45 MPH 40 MPH.
MP 1522.7 to MP 1526.7 60 MPH 50 MPH.
MP 1526.7 to MP 1529.0 50 MPH 45 MPH.
MP 1529.0 to MP 1541.8 60 MPH 50 MPH.
MP 1547.7 to MP 1555.2 65 MPH.
MP 1555.2 to MP 1559.0 50 MPH 45 MPH.

		_	
		Passenger	Freight
	MP 1559.0 to MP 1570.9		FO MIDIL
	MP 1570.9 to MP 1571.6		
	MP 1571.6 to MP 1571.9		
	MP 1571.9 to MP 1579.2		50 MPH.
	MP 1579.2 to MP 1587.4		FO MIDIL
	MP 1587.4 to MP 1589.2		50 MPH.
	MP 1589.2 to MP 1598.2		
	MP 1598.2 to MP 1602.8		
	MP 1614.5 to MP 1615.1		
	MP 1615.1 to MP 1616.4		
	MP 1616.4 to MP 1620.0		40 MDLI
	MP 1620.0 to MP 1622.5		
	MP 1622.5 to MP 1624.2		
	MP 1624.2 to MP 1629.4		
	MP 1629.4 to MP 1640.6		
	MP 1640.6 to MP 1642.6		
	MP 1642.6 to MP 1646.5		
	MP 1646.5 to MP 1649.6		
	MP 1649.6 to MP 1650.2	. 35 MPH	35 MPH.
1(0)	On and Onethology and Townson		
1(C).	Speed—Switches and Turnouts		
	Through dual control turnouts at the		
	following locations:	0014011	0=14511
	Trinidad	. 30 MPH	25 MPH.
	Lyons, Espanola, Edwall, Odessa, Gibson,		
	Wilson Creek, Adrian, Naylor, Quincy, Albus,	05.4511	05.14511
	and Malaga		
	End of double track Lamona and Bluestem	. 35 MPH	35 MPH.
	Trains over 100 TOB must not exceed 25 MPH		
	through turnouts shown to exceed that speed.		
		Up to 100	Over 100
		TOB	TOB
	Engines of freight trains passing signals:		
	Westward signal between Bluestem and Lamona		
	No. 1539.9	. 50 MPH	40 MPH.
	Westward signal between Ephrata and Naylor		
	No. 1601.1	. 55 MPH	45 MPH.

1(D). Speed-Other

Temperature Restrictions

Westward absolute signal West Trinidad

Westward signal between Trinidad and

Westward absolute signal Wenatchee

All train speeds must be reduced 10 MPH below maximum posted speed (but in no case below 10 MPH) when ambient temperature exceeds 90 degrees Fahrenheit. Trains 100 TOB and over do not exceed 35 MPH.

MP 1627.0 40 MPH.

Albus No. 1629.9 40 MPH.

See Item 1 of the System Special Instructions for additional speed restrictions.

2. Bridge and Equipment Weight Restrictions Maximum Gross Weight of Car

Latah Jct. to Wenatchee 143 tons, Restriction B

Six-axle locomotives and six-axle derricks not permitted on following tracks:

Geiger Spur

Ephrata Air Base Spur

Harrington Fertilizer Tracks

At Quincy, Del Monte, Celite and Lamb Weston Spur Track

12 NORTHWEST DIVISION—No. 3—April 26, 2006—Columbia River Subdivision

3. Type of Operation

CTC—in effect:

MP 1481.6 to MP 1520.6

MP 1541.6 to MP 1646.7

ABS—in effect:

MP 1520.6 to MP 1541.6

MP 1646.7 to MP 1650.2

Double Track—in effect:

MP 1520.6 to MP 1541.6

Rule 9.14 and 9.15—in effect:

MP 1520.6 to MP 1541.6

Trains moving westward on Main 1 or eastward on Main 2 will not require track permit authority.

Yard Limits-in effect:

MP 1646.7 to MP 1650.2

Trains and engines must obtain permission from the yardmaster at Wenatchee or an other designated employee before entering these limits.

4. General Code of Operating Rules Items

Rule 6.19—When flagging is required, distance will be 2.5 miles. When operating against the current of traffic between Bluestem and Lamona, the distance will be 1.5 miles.

ABTH Rule 106.1, Regulating Horsepower per Ton—The last sentence of the first paragraph is changed to read: "Unless otherwise outlined below, crews must isolate or shut down excess units, but not more than 0.5 HPT below scheduled HPT, and not below 1.0 HPT."

5. Trackside Warning Detectors (TWD)

A. Protecting bridges, tunnels or other structures

MP 1622.2—DED—WWD only

MP 1624.2—DED

MP 1638.1-DED-WWD only

B. Other TWD locations

MP 1495.9—Recall Code 198

MP 1519.3—Recall Code 208

MP 1543.2—Recall Code 218

MP 1555.8—Recall Code 248

MP 1580.2—Recall Code 258

MP 1607.9—Recall Code 268

MP 1622.2—DED—EWD only

MP 1633.6—Recall Code 518

MP 1638.1—DED—EWD only—Recall Code 277

MP 1644.6—DED/Exception Reporting

6. FRA Excepted Track

Alcoa Spur and Geiger Spur—No explosives or hazardous chemicals may be shipped through Fairchild Air Force Base. See GCOR Rule 6.12.

7. Special Conditions

Edwall—If any indication of ammonia is detected, including, but not limited to, odor, fumes, unusual venting, or verbal warning, leave the potential exposure area immediately. Do not resume service to the industry until there is indication that the air is clear. An employee who detects ammonia must leave the area and immediately warn other crew members to not enter the area where the ammonia is indicated.

Harrington—When service is anticipated, train crew is to notify Western Farm Services of anticipated arrival. Calling prior to arrival will allow the customer to prepare the facility for switch service and possibly reduce crew members walking through customer property. For contact call (509) 253-4311. Call is to be made 45 minutes prior to anticipated arrival.

Train Makeup Instructions—Eastward trains handling dimensional Boeing cars behind the double stacks are permitted to handle those Boeing cars through to Spokane without switching to the headend.

Grade Locations—Locations with a grade equal to or greater than 1%:

MP 1482.3 to MP 1484.5-1% ascending

MP 1486.8 to MP 1489.9—1% ascending

MP 1594.6 to MP 1596.2-1% ascending

MP 1623.5 to MP 1632.5—1.04% descending

In the application of hand brakes, nothing between Latah Junction and Wenatchee exceeds 1% grade.

Recommended Roll-By Inspection Locations—

Espanola—Inspection only from the north side. Daylight.. inspections performed at the location of the overhead power transmission lines at MP 1499.0.

Lamona—From the crossing located 400 feet east of the signal.

Odessa West-Near the crossing.

Gibson West & East—For trains in the siding, conduct inspection from the side furthest away from the main line.

Wilson Creek East—At the highway grade crossing.

Wilson Creek West—Stop train 400 to 500 feet from the signal; inspect from the north side.

Adrian West—At the grade crossing. Westbound trains in the siding, use a spot 500 to 600 feet east of the signal.

Albus East—At the grade crossing.

Malaga East—On the south side, 500 feet west of the signal.

Test Mile Locations

MP 1497.0 to MP 1498.0

MP 1612.0 to MP 1613.0

Long and Short Miles—MP 1633.0 to MP 1634.0 between Trinidad and Albus is 11,000 feet long. MP 1528.0 to MP 1529.0 on Main 1 and Main 2 between Harrington and Mohler is 3,700 feet long.

Identifying Signals—In signaled territory, when a train is passing a signal displaying other than "Clear" in advance of a control point, a crew member must transmit the following by radio:

Train Identification (Initials, Engine Number and Direction) Signal Name - In advance of (Control Point Location), on (Track) at (Speed) MPH.

Example of transmission:

"BNSF 6301 South approach medium in advance of Napavine South on Main 1 at 50 MPH (on single track main track designation is not necessary).

Flash Flood Warnings—Refer to Item 33, System Special Instructions. The following locations have been identified as "critical areas" and are limited to restricted speed:

MP 1511.4 to MP 1512.4 MP 1503.0 to MP 1504.0

8. Line Segments

Yard Line Segments

Line Segment Limits

656 Apple Yard


Road Line Segments

Line Segment Limits

37 Latah Jct. to Wenatchee

9. Locations Not Shown as Stations

Name		Miles - Location	Capacity Cars	Switch Opens
01889	Fairchild Storage Track	4.1 east of Espanola	100	Both
01896	Geiger Spur	4.7 from Fairchild	Yard	West
01899	Waukon	5.7 east of Edwall	55	Both
01909	Canby	3.7 west of Edwall	29	East
01913	Bluestem Elevator	0.1 east of Bluestem	52	Both
01928	Mohler-Main 2	6.7 west of Harrington	55	East
01928	Mohler-Main 1	6.7 west of Harrington		West
01932	Downs-Main 2	4.7 east of Lamona	49	East
01956	Irby	8.9 west of Odessa	25	West
01963	Marlin	6.6 east of Wilson Creek	60	Both
01978	Stratford	7.8 west of Wilson Creek	60	West
01991	Air Base	2.2 east of Ephrata	Yard	East
02003	Winchester	5.1 west of Naylor	50	Both
02033	Voltage	2.5 east of Rock Island	32	Both
02036	Alcoa Spur on Spur	1.2 west of Rock Island	Yard	West

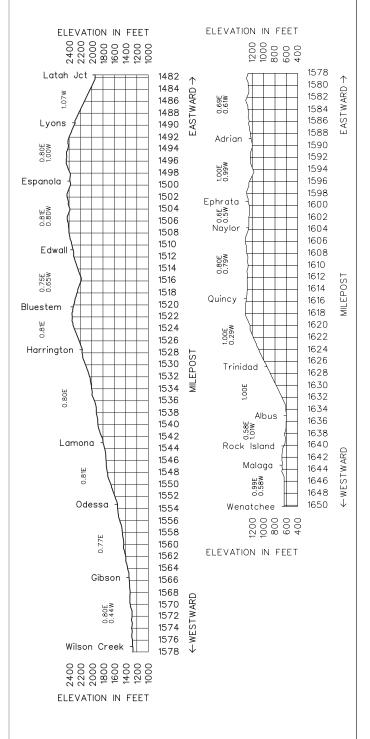

NORTHWEST DIVISION—No. 3—April 26, 2006—Fallbridge Subdivision 14

									7																						
•O3>8⊣0m8	Length of Siding	Station Nos.	Mile Post	Fallbridge Subdivision MAIN LINE STATIONS	Rule 4.3	Type of	Line	Miles to Next Stn.	V																						
*	(Feet)	12148	229.7	SP&S JCT	MJY	Oper. ABS	Segment	1.2	1																						
	7,932	12147	228.5	HOVER	IVIOT			4.6																							
	7,002	12151	223.9	FINLEY		-		8.1																							
	9,352	12159	215.8	YELLEPIT		-		12.5																							
	7,015	12172	203.3	BERRIAN		-		11.3																							
	9,351	12183	192.0	PLYMOUTH				12.2																							
	7,052	12195	179.8	PATERSON		СТС		9.4	1																						
	9,128	12205	170.4	WHITCOMB				12.7																							
	7,103	12218	157.7	McCREDIE				9.9	1																						
	8,459	12228	147.8	ROOSEVELT				11.9	1																						
	7,099	12240	135.9	BATES				10.9	1																						
	9,136	12250	125.0	TOWAL				11.8	1																						
	7,092	12261	113.8	MARYHILL		1		7.7																							
		12269	106.1	WISHRAM	BJTX(2)	2MT CTC		2.7	1																						
		12272	103.4	AVERY		CIC		10.1	1																						
	9,935	12282	93.3	NORTH DALLES		1		8.0																							
		12290	85.3	LYLE				9.8																							
	11,115	12299	75.5	BINGEN		стс		10.1																							
	9,888	12309	65.4	COOKS				11.5																							
	11,085	12321	53.9	STEVENSON			-										11.1														
	9,958	12333	42.8	SKAMANIA																			-							13.9	
	9,910	12347	28.9	WASHOUGAL																											
		12351	24.5	CAMAS				10.0																							
		12361	14.5	McLOUGHLIN				2.4																							
		12363	12.1	EAVAN	Х			2.2																							
		12365	9.9	VANCOUVER	BMJTX			1.8																							
		12368	8.1	N PORTLAND JCT	MJTX	ONAT		1.1																							
		12369	7.0	EAST ST JOHNS	BJX	2MT CTC		2.7																							
		12372	4.3	WILLBRIDGE	BMJTX			2.3																							
		12373	2.0	LAKE YARD	TX			2.0																							
		12375 12374	0.0	PORTLAND (Union Station)	BJX			232.7	1																						

Radio Channel No. 87 in service between Washougal and SP&S Jct.

Radio Channel No. 76 in service between Portland and Washougal.

Radio Call-In					
Kennewick-54(X)	Yellepit-70(X)	Umatilla-71(X)			
Whitcomb-73(X)	Roosevelt-59(X)	Towal-75(X)			
Maryhill-41(X)	Wishram-76(X)	Lyle-72(X)			
Bingen-79(X)	Stevenson-80(X)	Camas-81(X)			
Vancouver-50(X) Emergency - Call 911					
Dispr X=0, Mechanical X=2, Field Support X=3, Warm Bearing X=5					

Train Dispatchers' Phone Numbers SP&S Jct. to ESS Washougal—8-234-1617 Vancouver Terminal Dispatcher—8-234-6125

Speed Regulations

1(A). Speed—Maximum

	Passenger	Freight
MP 229.7 to MP 106.1	. 79 MPH	60 MPH.
MP 106.1 to MP 0.0	. 70 MPH	60 MPH.
MP 9.9 to MP 0.0 (Talgo only)	. 79 MPH.	

Exception to SSI Item 1. Speed Restrictions:

Trains consisting entirely of Loaded Double Stack Equipment may operate at 60 MPH. if not exceeding 105 TOB.

1(B). Speed—Permanent Restrictions

•	· ·	Passenger	Freight
	MP 229.7 to MP 229.1	35 MPH	25 MPH.
	MP 229.7 to MP 229.1		
	MP 215.1 to MP 211.5		
	MP 187.5 to MP 182.4		
	MP 174.6 to MP 174.3		
	MP 174.2 to MP 154.2		
	MP 150.2 to MP 142.5		
	MP 138.6 to MP 137.7		
	MP 132.9 to MP 131.3		
	MP 121.4 to MP 112.7		
	MP 112.7 to MP 107.7		
	MP 107.7 to MP 106.1		
	MP 106.1 to MP 105.9		
	MP 105.9 to MP 103.0, (Main 1)	60 MPH	50 MPH.
	MP 105.9 to MP 102.4, (Main 2)		
	MP 99.9 to MP 99.1		
	MP 95.3 to MP 95.8		
	MP 92.5 to MP 92.1		
	MP 86.5 to MP 83.6		
	MP 83.6 to MP 82.6		
	MP 82.6 to MP 79.2		
	MP 75.9 to MP 75.3		
	MP 75.3 to MP 54.2		
	MP 54.2 to MP 53.6		
	MP 53.6 to MP 45.1		
	MP 45.1 to MP 33.9		
	MP 28.8 to MP 25.6		
	MP 25.6 to MP 24.9		
	MP 24.9 to MP 24.0		
	MP 24.0 to MP 21.7		
	MP 11.5 to MP 10.5		
	MP 10.5 to MP 9.8, (Both Main Tracks)		
	MP 9.8 to MP 9.2		
	MP 9.2 to MP 8.9		
	MP 8.9 to MP 8.5 MP 8.5 to MP 5.5		
	MP 5.5 to MP 5.0		
	MP 5.0 to MP 3.4		
	MP 3.4 to MP 0.9		
	MP 0.9 to MP 0.3		
	MP 0.3 to MP 0.0		
	Northbound passenger trains may increase spee		
	Street crossing is occupied and gates are set to		
	Street crossing is occupied and gates are set to	provide protec	uofi.

Talgo Train Speed Restrictions

MP 9.8 to MP	9.2	30 N	ирн.
MP 9.2 to MP	8.9	40 N	ирн.
MP 8.9 to MP	8.5	30 N	ИРН.
MP 8.5 to MP	5.5	79 N	ИРН.
MP 5.5 to MP	5.0	30 1	ирн.
MP 5.0 to MP	3.0	50 N	ирн.
MP 3.0 to MP	1.5	70 N	ирн.
MP 1.5 to MP	0.9	50 N	ирн.
MP 0.9 to MP	0.3	35 N	ирн.
MP 0.3 to MP	0.0	10 1	ИРН

1(C). S

Through dual control turnouts at McLoughlin

Speed—Switches and Turnouts	
Freight Main	10 MPH 10 MPH.
On sidings and/or through dual control turnouts	
at the following locations: Hover	25 MPH 25 MPH.
Except East Dual Control Turnout	12 MPH 12 MPH.
Plymouth, Roosevelt, Skamania	30 MPH 30 MPH.
Stevenson	25 MPH 25 MPH.
North Dalles, Bingen, Cooks, Washougal,	
Yellepit, Berrian, Whitcomb, Paterson,	
Bates, Towal, McCredie, Maryhill	35 MPH 35 MPH.
On other sidings	10 MPH 10 MPH.
Bingen, MP 75.8, leaving siding WWD (HER)	25 MPH 25 MPH.
Through dual control turnouts at the following loc	ations:
Pasco (MP 230.2), SP&S Jct., Wishram,	
Avery, Stevenson, and Eavan	25 MPH 25 MPH.

Over 100 TOB 40 MPH. 40 MPH.

	Passenger	Freight
Through turnouts:		
Vancouver Center, Vancouver Center to		
Yard Lead	. 10 MPH	10 MPH.
Fallbridge Subdivision to former		
A-Line Subdivision	. 10 MPH	10 MPH.
Through dual control turnouts:		
Columbia River Bridge Interlocking to		
Fallbridge Subdivision	. 10 MPH	10 MPH.
Willbridge Interlocking		
North Portland Interlocking	. 10 MPH	10 MPH.
East and West Crossover Switches MP 0.5	. 30 MPH	30 MPH.

Trains handling continuous welded or jointed rail are restricted to 25 MPH on curves at the following locations:

MP 0.0 to MP 0.1 MP 22.5 to MP 22.9 MP 23.2 to MP 23.5 MP 121.4 to MP 121.5 MP 123.5 to MP 123.6

Trains over 100 tons per operative brake must not exceed 25 MPH through turnouts shown to exceed that speed.

1(D). Speed—Other

MP 229.7 to MP 229.1

Empty intermodal and unit trains only	35 MPH	35 MPH.
Vancouver Middle Lead Track between		
8th Street and Vancouver Center	10 MPH	10 MPH.
On Willbridge Wye track	10 MPH	10 MPH.
Portland on PTRR Co. tracks	10 MPH	10 MPH.
Tunnels 1, 2, 10 and 11, Car Kind M3E		13 MPH.
Tunnels 8 & 9—CRLE 1997-1999 &		
BNSF 314000-314228		13 MPH.
Tunnel 4—CRLE 1997-1999 &		
BNSF 314000-314228		5 MPH.

Additional information on special car handling instructions are located in the System Special Instructions.

Hot Weather Speed Restrictions—When ambient (air) temperature is in one of the following ranges, the applicable restrictions will apply:

Temperature	Freight Trains	Freight Trains	Passenger
Range	Up to 100 TOB	100 TOB & Over	Trains
90 to 109	Maximum	Maximum	Maximum
degrees	50 MPH.	45 MPH.	60 MPH.
110 degrees	Maximum	Maximum	Maximum
and over	45 MPH.	40 MPH.	60 MPH.

Exception: The following location has been identified as a critical zone:

MP 0.0 to MP 53.9—Through the limit of this critical zone, when ambient (air) temperature is in one of the following ranges, the applicable further restriction will apply:

Temperature Range	Freight Trains Up to 100 TOB	Freight Trains 100 TOB & Over	Passenger Trains
100 to 109 degrees	Maximum 45 MPH.	Maximum 40 MPH.	Maximum 60 MPH.
110 degrees and over	Restricted speed from 1100 to 2000, unless track inspected after 1400, then 30 MPH.	Restricted speed from 1100 to 2000, unless track inspected after 1400, then 30 MPH.	Restricted speed from 1100 to 2000, unless track inspected after 1400, then 30 MPH.

Note: When complying with the above temperature restrictions, existing restrictions must be observed.

Cold Weather Speed Restrictions - When temperatures are below -10 degrees Fahrenheit, the applicable restrictions will apply:

- 40 MPH for trains exceeding 100 tons per operative brake

- 50 MPH for trains less than 100 tons per operative brake
- 65 MPH for passenger trains, Z-symbol intermodal trains, or single level loaded intermodal trains.

See Item 1 of the System Special Instructions for additional speed restrictions.

2. Bridge and Equipment Weight Restrictions Maximum Gross Weight of Car

Pasco to Portland 143 tons, Restriction B

Six-axle locomotives and six-axle derricks are not permitted on the following tracks:

Dallesport-Industrial Park

Bingen—Industry tracks

Hood—Flat track

Home Valley-Co-ply track

Port of Washougal Lead-Lead track

Camas—all tracks except: Old Pass, House Track, Portco Tracks, Columbia Business Park

Vancouver Yard—Caboose Track Lead and Caboose Tracks 1 and 2.

3032 through 3038-30 yard

3107 through 3116—Tesoro, Gen Chem, Boise, MTC

3166 through 3199—Port Loop trk, GATX, Com Plus, Food Express

3200 through 3267—Kotobuki, Deml, Steel Yd, NW Pak, Metro Metal

3400 through 3468—Frito, Prewood, Nalco

3503 through 3511—Pac Paper, Holnam, Albina, Boise Cascade

3552 through 3553—Asphalt Supply

3610 through 3634—Ship yard tracks

3723—Bower

3752 through 3770—Nutt trk, Back trk, Bemis, Texon, Suburban, Halser

3913 through 3918—Rail2, Motor Car Shop, Lmb1 & 2, Coa1 & 2

3962 through 3963—Store 1 & 2

3. Type of Operation

CTC—in effect:

MP 229.7 to MP 0.3

Multiple Main Tracks—in effect: 2 MT

MP 106.1 to MP 102.4

MP 14.9 to MP 0.3

Interlockings and Drawbridges not Indicated at Station Columbia River Drawbridge MP 9.6—Manual Interlocking. Maintenance of Way employees may occupy interlockings on track and time authority from train dispatcher AND verbal permission from bridgetender.

Oregon Slough Drawbridge MP 8.8—Manual Interlocking, normally unattended.

When a signal displays a Stop indication, after complying with GCOR Rule 9.12.2, the train will be governed as follows: A crew member must precede the movement between the outer opposing absolute signals of the interlocking, examine the track for defects, determine that the route is properly lined and that the derails are in the non-derailing position. The crew member must also verify that the drawbridge is in the proper position for the train to pass. The crew member may then authorize the train to proceed through the limits at restricted speed.

Maintenance of Way employees may occupy the interlocking on track and time authority from the train dispatcher. The bridgetender must not operate the bridge without talking to the train dispatcher to determine if Maintenance of Way track and time authority is in effect.

Willamette River Drawbridge MP 5.1—Manual Interlocking.

UP Trackage-Train, engine, and yard crews operating over UP trackage between Brooklyn Yard and East Portland Interlocking and between the East Portland interlocking and North Portland are governed by UP rules and timetable.

PTRR Trackage—Train, engine, and yard crews operating over PTRR trackage at Portland between Union Station and MP 0.3 are governed by PTRR yard bulletins and instructions. PTRR rules apply. All trains at Portland Union Station must obtain permission from PTRR Yardmaster prior to departure.

General Code of Operating Rules Items

Rule 1.47—In addition to the requirements of General Code Operating Rule 6.10 and to Signal Switch Awareness Form, the Conductor must do the following:

Before departing from a siding or when holding the main track at a station before departing that station, the Conductor must review Track Bulletin(s) that his/her train will be operating under with the Engineer and the Engineer must verbally acknowledge understanding of all restrictions listed on the Track Bulletin(s). After receiving verbal acknowledgment from the Engineer, the Conductor will enter time, date and his/her initials on the Track Bulletin(s).

Rule 6.17 and Rule 8.3—Trains departing Wishram, via the East Leg of the Wye, may leave this switch lined and locked in the reverse position. Advise Pasco West Dispatcher when clear of the Fallbridge Subdivision.

Rule 6.19—When flagging is required, distance will be 2.5 miles between SP&S Jct. and Vancouver, 2.0 miles between Vancouver and Willbridge and 1.0 mile between Willbridge and Portland.

5. Trackside Warning Detectors (TWD)

Protecting bridges, tunnels or other structures: None

Other TWD locations

MP 19.8—Recall Code 508

MP 25.1—DED/Exception Reporting

MP 32.2—DED/Exception Reporting

MP 37.6—Recall Code 238

MP 43.5—DED/Exception Reporting

MP 48.4—Recall Code 808

MP 52.5—DED/Exception Reporting

MP 58.6—DED/Exception Reporting

MP 61.0-Recall Code 818

MP 66.0—DED/Exception Reporting

MP 68.8—DED/Exception Reporting

MP 70.7—Recall Code 798

MP 73.9—DED/Exception Reporting

MP 81.7—Recall Code 788

MP 87.3—DED/Exception Reporting

MP 96.1—DED/Exception Reporting

MP 100.0-Recall Code 768

MP 105.1—DED/Exception Reporting

MP 110.1—DED/Exception Reporting

MP 118.6—DED/Exception Reporting

MP 128.0—Recall Code 758 (No Train Speed)

MP 131.86—DED/Exception Reporting

MP 136.7—DED/Exception Reporting

MP 142.2—DED/Exception Reporting

MP 147.1—DED/Exception Reporting

MP 152.2—Recall Code 598

MP 177.2—Recall Code 738

MP 190.8—Recall Code 737

MP 207.8—Recall Code 718

FRA Excepted Track

Portland-

St. Helen's Road Lead, west of 12th St. Yard.

Run Tracks 3, 6 & 10, Columbia Business Park, Zone 2. Lie Bye Lead, 12th Street Yard, from and including Switch 303, to and including Switch 306.

Bushnell Lead, off Lie Bye Lead, 12th Street Yard. All tracks in Zones 3 and 4.

7. **Special Conditions**

Roosevelt—Derails and blue flags have been installed on both ends of the three ramp tracks at Regional Disposal Company's (RDC) intermodal facility at Roosevelt. Responsibilities of RDC and BNSF employees are as follows:

The RDC foreman is responsible for the application and removal of the blue flags/lights, derails and locks which will be applied prior to beginning of loading/unloading a track and removed, and locked, when finished. When a train is spotted for unloading during RDC working hours, the foreman will not flag the track until he has ascertained from the BNSF crew that the track is properly secured.

When spotting an inbound train in RDC's yard, BNSF crew will position it so all rail equipment will be at least 150 feet inside the derail after moving the power to the west end of their inbound train and secure the train per Air Brake and Train Handling Rule 103.8. If RDC tracks are blue flagged, a member of the BNSF train crew will contact the RDC foreman for their removal, any spotting instructions, and inform the foreman when any cars left are properly secured.

Cliffs-Due to extreme grade, air will be cut in and operative on all cars being handled to and from Aluminum Plant.

Bingen - Bridge 75.3 is protected by a detector actuated by a high load passing through the underpass. Eastward trains proceeding beyond signal 74.0, per rules 9.1.13 and 9.1.14 and westward trains proceeding beyond West Bingen per rule 9.12.1, must stop short of bridge 75.3 and make an inspection for damage before passing over bridge 75.3.

Hood—Cars exceeding 75 feet in length must not be handled on Broughton Lumber Flat Track.

Skamania—Do not block the West Skamania Landing Road crossing between the hours of 0730 and 0800, 1430 and 1500, and 1545 and 1615 Monday through Friday when school is in session to allow school bus access. School busses may not use the East Skamania Landing Road crossing because of clearance problems. If it becomes necessary to cut the crossing, be sure to comply with GCOR Rule 6.32.2 to allow for crossing signals to clear and afford bus driver adequate visibility of the adjacent track when crossing.

Camas—When spotting cars of chlorine on the two chlorine spur tracks at the end of the Chlorine tracks, cars must be left separated by at least two feet with couplers in closed position. Operator from the James River Corp. bleach plant will place metal cap over closed couplings before cars are connected for unloading. When cars are to be pulled out, he will remove caps from cars that are to be moved and which have been disconnected from dispensing hoses. Train crew members will not be permitted to remove a cap from a coupling, and will see that all dispensing hoses are disconnected from cars to be moved before further movement is made.

No switching service is to be performed on the Chlorine spur at James River between the hours of 1200 and 1215, 1245 to 1300 and 1700 to 1715. Cars must not be dropped or kicked when performing switching on the following tracks owned by James River Corporation: Chlorine spur, Converting spur, Mill spur and Warehouse spur No. 3.

When James River personnel are using the Chip Tracks to unload woodchips, they will lock both access switches with their lock. BNSF crews must contact the unloading crew using the following procedure:

- Call James River, Ext. 3631.
- · Call James River rail crew on radio channel 66.
- Call Chip Screen Room operator, Ext 3663.
- Call Chip Screen Room operator on radio channel 66.
- Call James River tug, cellular phone 921-2376.
- Call James River tug on radio channel 66.

A mill phone is located in the crew room at the Camas Depot.

Vancouver—Lead connecting tracks NP02-NP07, including crossover between NP07-NP08, north end of NP yard, is out of service.

All locomotive movement in and out of the Vancouver Fueling Facility requires permission from Vancouver Yardmaster.

Normal position of Vancouver Fueling Facility switches are lined for Back Lead movement on the north end and lined for Track 16 on the south end. These switches must be returned to normal position after use.

Within Vancouver SP&S main yard, crews on all trains and engines must get permission from Vancouver Yardmaster prior to commencing movement in or out of "B" yard tracks.

Unless an immediate movement is to be made, all switches on Middle Lead, including switch to New Grain Yard Lead, must be left lined for movement on the Middle Lead.

Cars exceeding 73 feet must not be placed in NP Tracks 3374 or 3375.

Mill Plain Crossing Instructions—New key controlled traffic control signals are in service on the west end of the new Mill Plain overpass. The north key controller is located on the city traffic signal mast and the south key controller is on a pedestal next to the track.

To Operate:

Stop at the stop signs and key the controller CLOCKWISE, then turn it back and remove the key. Nothing will happen until the key is removed. At that time, a white indicator light will turn on above the railroad traffic signal to indicate the request is in. When all conflicting highway signals are at stop, the railroad control signal will change from red to green.

The system does not reset itself. The train crew has to key the controller again to reset the system for highway traffic. The reset can be done with either key controller. Do not reset the controller until the train is clear of the crossing.

East St. Johns—Do not leave engines or cars unattended on the Barnes Lead.

Hyundai Lead crossing signal activation procedures:

Prior to crossing road leading into container facility on Hyundai Lead, the following must be complied with:

- Train or engine must stop at sign located 75 feet from crossing.
- Activate key controller. Observe that indicator light on signal bungalow has been activated.
- After light has been activated, movement can proceed into the crossing area. Note: A 20 second delay occurs from the time key controller is activated until light on bungalow is illuminated.
- Movement over crossing must not be made until light on bungalow is illuminated.
- After movement has been completed over crossing, any other movement over crossing must be made in accordance with items 1, 2, and 3 above.
- 6. A recorder unit is tied to the key controllers to keep a

record of each activation and the amount of time elapsed between manual activation of the crossing signal and train occupation of the crossings island track circuit.

The crossover switch from Main 2 to the East Pass at MP 7.0 at East St. Johns has been removed. At MP 6.1 at East St. Johns the switch was reversed to an Eastbound facing point move from Main 1 to the West Pass.

Willbridge Garbage Transfer Station crossing-At the North crossing entrance to the garbage transfer site near 61st Street and the Atochem Company, trains or engines must stop at the railroad stop sign before occupying the crossing. When a movement occupies the track circuit in approach to the Stop sign this starts the traffic signal preemption and places the traffic signals at stop for all possible moves across the crossing. When the traffic signals have been set to stop, a light on the top of the signal case in the Northwest quadrant will be illuminated to indicate to the train crew that the traffic signals are at stop and their move can be made across the crossing. If the light on the case fails to light, the train crew must observe that the traffic signals are all red and provide flag protection before occupying the crossing. Should the light on the case fail the signal department must be notified promptly. Refer to Rule 6.32.6, Blocking Public Crossings.

The South crossing will be protected by standard railroad crossing equipment. Speeds in approach to the crossing must not exceed 10 MPH.

Portland, Lake Yard, Willbridge—Cars spotted on city streets must be protected by two red lights on end of end cars.

Before a movement enters the intersection of 29th Avenue and Nicolai Street, crew members must use the switch key controller to actuate the traffic signals. After the movement has entered intersection, the switch key may be removed and the signals will return to automatic operation once the movement has cleared the intersection.

Flashing light signals will protect crossing movements on N.W. Front Avenue for the following spur tracks:

Tricon Waterway Tracks 3, 4, and 8
Gunderson Tracks Elf Atochem Spurs 1, 3, and 6
Gemstar (flashing lights and gates)

Before entering the crossing, the movement must stop at the Stop signs on each side of the crossing and a crew member must use the switch key controller on either side of the crossing to actuate the crossing protection.

Insert the switch key in the start position and turn the key to actuate the crossing protection. The key can then be removed and the lights will continue to operate. After the movement is clear of the crossing, a crew member must restore the crossing protection to normal by inserting the switch key in the Stop position, turn the key to the "Stop" and remove the key.

Traffic signals will protect crossing movements on the Oregon Steel Spur track at N.W. Front Avenue near the N.W. Kittridge Avenue intersection. Before entering the crossing, the movement must stop at Stop signs on each side of the crossing and a crew member must use the switch key controller on either side of the crossing to actuate the crossing protection. After the movement is clear of the crossing, a crew member must use the switch key controller to restore the traffic signals to normal operation.

Indicator lights are located adjacent to each switch key controller and will display the following traffic signal indications: **Red:** Normal operation for traffic.

Green: Traffic signals are operating to provide crossing protection.

Flashing lights with gates are in service at the Balboa Street crossing near MP 4.2 at Willbridge. Movements on the ELF Atochem-Chipman-Gilmore Steel spur must stop at the Stop sign 25 feet from crossing and wait for signals and gates to operate for a sufficient time to provide warning. A switch key controller on the signal bungalow near the crossing allows manual operation of the signals and gates.

26th Ave. and Front Street in Portland—Traffic signals are activated by island track circuits. Rail movements must stop at the Stop signs prior to entering Front Street to allow the crossing signals to activate.

Remote Control Operations—Signs located at MP 132.0 (Seattle Subdivision) and MP 13.0 and MP 0.0 (Fallbridge Subdivision) designate the Remote Control Area for the Vancouver/Portland Complex.

Close Clearance—May exist on all auxiliary tracks.

McCall Oil and Chemical—between Tracks 1102 and 1103.

Northwest Pack Spur—Close clearance to loading dock, do not ride cars past fouling point of this track.

Hoyt Street—All yard tracks out of service except tracks 0610 and 0612.

Terminal 6—Track occupancy on Ford Lead south of Marine Drive will be protected by industry flag, temporary derails and Ford Auto Facility lock when in use by Ford Auto Facility crews. Refer to GCOR Rule 5.14.

SP&S Main Yard—Account potential close clearance between tracks 4501 to 4518 in Vancouver SP&S Main yard, do not ride cars into these tracks when cars are on adjacent tracks.

Four fire hydrants adjacent to St. Helens Road between MP 3 and MP 3.5 impair standard side clearance in this area by 1 foot 5 inches. Impaired clearance signs not placed.

The following switching procedures will apply on tracks identified to have track centers of 13 feet or less: When working around areas that have been identified having close clearance conditions, before fouling those areas all movements are to be stopped and all crew members accounted for before completing the switching move. Riding the side of cars is prohibited unless the adjacent track is known to be clear. It is the responsibility of each crew member to review close clearance locations within their area of work prior to the start of the work process.

The Following tracks have been identified to have track centers of 13 feet or less:

At Vancouver:

Between tracks 4504 and 4505

Between tracks 4507 and 4508

Between tracks 4509 and 4510

Between tracks 4511 and 4512

Between tracks 4512 and 4513

Between tracks 4513 and 4514

Between tracks 4514 and 4515

At Wishram:

Between tracks 6502 and 6503

Between tracks 6503 and 6504

Train Inspections—A member of inbound crews on through trains operating cabooseless will give the outbound train a roll-by inspection and advise outbound crew the condition of the train, unless outbound crew will not be immediately available or inbound crew is otherwise relieved of duties.

Identifying Signals—In signaled territory, when a train is passing a signal displaying other than "Clear" in advance of a control point, a crew member must transmit the following by radio:

Train Identification (Initials, Engine Number and Direction) Signal Name - In advance of (Control Point Location), on (Track) at (Speed) MPH.

Example of transmission:

"BNSF 6301 South approach medium in advance of Napavine South on Main 1 at 50 MPH (on single track main track designation is not necessary).

Exception: Due to radio congestion, transmission will not be made between MP 32.4 westwardapproach Washougal and MP 0.0.

Tunnel Locations

Tunnel No.	Milepost	Tunnel No.	Milepost
1	34.7	6	69.7
1.5	49.5	7	82.8
2	67.6	8	83.1
3	67.9	9	83.3
4	68.4	10	83.5
5	69.1	11	85.9
		12	108.1

Locations having individually controlled crossover switches:

North Portland

Automatic Equipment Identification (AEI)—Located at: North Portland Jct., MP 9.0, McLoughlin MP 14.5.

Hazardous Material—The Oregon Vehicle Code 824.084 requires a visual external inspections of all cars standing in rail yards or stations more than two hours. Each rail car containing hazardous material and bearing an "Explosive A", "Flammable Gas" or "Poison Gas" placard as required by federal regulation, and which remains in a rail yard or station for more than two hours, shall be visually inspected externally by the transporting railroad within two hours of the car's arrival and within two hours of the car's departure. If no carman is on duty to perform the required OVC 824.084 inspections, the inspections shall be made by a member of the train or switch crew at each yard or station where the affected rail car terminated or originated. The person making the inspection shall ascertain whether there is any evidence or signs of leakage or other loss or change of contents from any affected rail cars and whether there are any obvious defects in the running gear of any affected rail cars. The dispatcher shall be immediately notified of all problems observed which are not promptly corrected.

Trains Destined For OT Subdivision—

Manifest/Intermodal Trains:

- With helpers/distributed power on rear 9,500 tons
- With helpers/distributed power cut in 12,000 tons Loaded Unit Bulk Commodity Trains:

Same as above, except

- With helpers/distributed power cut in - 15,000 tons Note: Helpers may also be cut in if tonnage is less than 9,500 tons

Flash Flood Warnings—Refer to Item 33, System Special Instructions. The following locations on this subdivision have been identified as "critical areas".

MP 133.65 to MP 133.75

MP 141.05 to MP 141.15

MP 146.95 to MP 147.05

MP 161.75 to MP 161.85

MP 167.85 to MP 167.95

MP 174.85 to MP 174.95

MP 190.55 to MP 190.65

MP 204.75 to MP 204.85

Roadrailer Equipment—Train total trailing tonnage must not exceed 3,000 tons.

Additional Restrictions Train Tonnage—Restriction

0 -1500 Tons-No Restrictions

Over 1500 Tons—No more than 1500 trailing tons behind any Roadrailer unit weighing 29 tons or less.

Note: A Roadrailer unit is defined as one trailer and its accompanying coupler mate or intermediate bogie.

8. Line Segments

Yard Line Segments


raid Lille Segii	ICIIIS	
Line Segment	Yard	Limits
632	. Wishram	
643	. Vancouver	. Vancouver to East end Columbia
		River Bridge
645	. E St. Johns	. East end Columbia
		River Bridge to
		East end
		Willamette River
		Bridge
646	. Willbridge	. East end
		Willamette River
		Bridge to Gasco
		(MP 5.6) 10
		Kittridge Ave.
647	. Portland	. Kittridge Ave. to
		East Portland
2119	. Guilds Lake Yard	. Hub Center

Road Line Segments Line Segment Limits

47 SP&S Jct. to Portland 688 Whitcomb—MP 174.0

9. Locations Not Shown as Stations

Name	Miles - Location	Capacity Cars	Switch Opens
12200 Whitcomb Pit	3.9 east of Whitcomb- MP 174.3	37	Both
Floxton Spur	7.3 west of Roosevelt MP 140.5	16	East
12255 Cliffs (Aluminum Plant)	5.0 east of Maryhill- MP 118.6	33	West
12256 Hewett	4.0 east of Maryhill- MP 117.6	60	Both
12272 Avery Storage Tracks (2)	Avery MP 103.4	70 Each	Both
12278 Dallesport Ind. Park	3.7 east of North Dalles-MP 97.0	Yard	East
12279 Dam Spur	3.3 east of North Dalles-MP 96.6	10	West
12290 Skidway (2 tracks)	Lyle-MP 85.3	106	Both
12300 Underwood Fruit & Whse.	0.9 west of Bingen-MP 75.0	6	East
12304 Hood	4.3 west of Bingen-MP 70.9	54	Both
12316 Home Valley	6.6 west of Cook-MP 59.3	40	Both
12322 Stevenson Plywood Co.	1.6 west of Stevenson- MP 53.2	15	East
12326 North Bonneville (1 track)	5.0 west of Stevenson- MP 50.3	104	Both
12337 Prindle	4.3 west of Skamania- MP 37.6	3	East
12343 Mt. Pleasant	4.0 east of Washougal-MP 32.1	95	Both
Old Siding Washougal	Washougal-MP 28.8	70	Both
12350 Camas-Washougal Port	3.8 east of Camas-MP 27.6	15	East
CRT Spur	2.2 east of Camas-MP 26.0	3	East
Hamilton Bros. Lumber Co.	2.0 east of Camas-MP 25.8	3	East
12355 Columbia Vista Lumber Co.	3.4 west of Camas-MP 20.5	2	West
12362 Portco (Main 2)	1.0 east of Eavan-MP 13.1	6	East

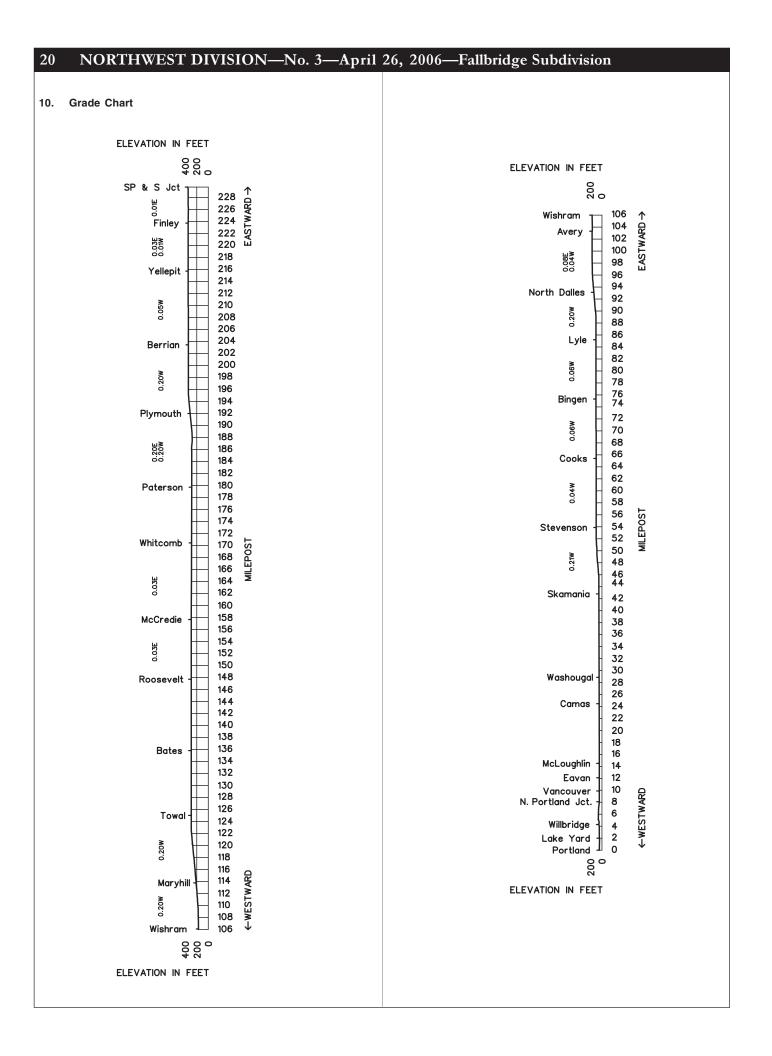

Length of Siding (Feet)	Station Nos.	Mile Post	Gateway Subdivision MAIN LINE STATIONS	Rule 4.3	Type of Oper.	Line Segment	to	T H W A R
	14295	0.0	BIEBER LINE JCT	J	Rula		1.0	D
	14296	1.0	KLAMATH FALLS	BT	6.28		2.0	
		3.0	SOUTH KLAMATH FALLS				12.4	
2,400	14311	15.4	MERRILL				9.1	
	14320	24.5	MALIN				7.1	
2,250	14327	31.6	STRONGHOLD	Α			13.1	
5,073	14340	44.7	MAMMOTH				9.5	
6,751	14350	54.2	KEPHART				12.3	
5,036	14362	66.5	SCARFACE		TWC		11.8	
6,820	14374	78.3	LOOKOUT	J		55	12.7	
8,024	14385	90.0	BIEBER	Т			17.2	
4,251	14505	108.2	LITTLE VALLEY				18.3	
6,758	14520	126.5	HALLS FLAT	Т			13.7	
4,235	14525	140.2	LODGE POLE				23.4	
4,338	14545	163.6	WESTWOOD				13.7	
7,942	14555	177.3	ALMANOR				11.0	
4,236	14560	188.3	GREENVILLE				8.5	
4,208	14565	196.8	MOCCASIN				6.0	
	14570	202.8	KEDDIE	JT			202.8	
	cof Siding (Feet) 2,400 2,250 5,073 6,751 5,036 6,820 8,024 4,251 6,758 4,235 4,338 7,942 4,236	of Siding (Feet) Nos. 14295 14296 14296 2,400 14311 2,250 14327 5,073 14340 6,751 14350 6,758 14505 6,758 14505 4,235 14555 4,236 14560 4,208 14565	of Siding (Feet) Station Nos. Mile Post 14295 0.0 14296 1.0 2,400 14311 15.4 14320 24.5 2,250 14327 31.6 5,073 14340 44.7 6,751 14350 54.2 5,036 14362 66.5 6,820 14374 78.3 8,024 14385 90.0 4,251 14505 108.2 6,758 14520 126.5 4,235 14525 140.2 4,338 14545 163.6 7,942 14555 177.3 4,208 14560 188.3 4,208 14565 196.8	of Siding (Feet) Station Nos. Mile Post Post MAIN LINE STATIONS 14295 0.0 BIEBER LINE JCT 14296 1.0 KLAMATH FALLS 2,400 14311 15.4 MERRILL 14320 24.5 MALIN 2,250 14327 31.6 STRONGHOLD 5,073 14340 44.7 MAMMOTH 6,751 14350 54.2 KEPHART 5,036 14362 66.5 SCARFACE 6,820 14374 78.3 LOOKOUT 8,024 14385 90.0 BIEBER 4,251 14505 108.2 LITTLE VALLEY 6,758 14520 126.5 HALLS FLAT 4,235 14525 140.2 LODGE POLE 4,338 14545 163.6 WESTWOOD 7,942 14565 177.3 ALMANOR 4,236 14565 196.8 MOCCASIN	of Siding (Feet) Station (Nos. Post) Main Line STATIONS Rule 4.3 14295 0.0 BIEBER LINE JCT J 14296 1.0 KLAMATH FALLS BT 2,400 14311 15.4 MERRILL 14320 24.5 MALIN 2,250 14327 31.6 STRONGHOLD A 5,073 14340 44.7 MAMMOTH A 6,751 14350 54.2 KEPHART SCARFACE 6,820 14374 78.3 LOOKOUT J 8,024 14385 90.0 BIEBER T 4,251 14505 108.2 LITTLE VALLEY 6,758 14520 126.5 HALLS FLAT T 4,235 14525 140.2 LODGE POLE 4,338 14545 163.6 WESTWOOD 7,942 14565 196.8 MOCCASIN	of Siding (Feet) Station (Nos. Post Post Post STATIONS Rule A.3 Type of Oper. 14295 0.0 BIEBER LINE JCT J Bule 628 14296 1.0 KLAMATH FALLS BT BT 2,400 14311 15.4 MERRILL MERRIL MERRIL A 2,250 14327 31.6 STRONGHOLD A A MAMMOTH A MAMMOTH A 6,751 14350 54.2 KEPHART T TWC 6,820 14374 78.3 LOOKOUT J 8,024 14385 90.0 BIEBER T T 4,251 14505 108.2 LITTLE VALLEY 6,758 14520 126.5 HALLS FLAT T 4,235 14525 140.2 LODGE POLE 4,338 14545 163.6 WESTWOOD 7,942 14565 196.8 MOCCASIN MOCCASIN A	of Siding (Feet) Station (Nos. Post Post Post Post Post Post Post Post	of Siding Station (Feet) Station Nos. Mile Post MAIN LINE STATIONS Rule 4.3 Post of Post Stm. Type of Oper. Segment Stm. Ion Next Stm. 14295 0.0 BIEBER LINE JCT J Rule 628 Rule 628 1.0 2.0 14296 1.0 KLAMATH FALLS BT 8.2 12.4 2.0 2,400 14311 15.4 MERRILL MERRILL 9.1 7.1 2,250 14327 31.6 STRONGHOLD A 9.5 13.1 5,073 14340 44.7 MAMMOTH MAIN 9.5 12.3 5,036 14362 66.5 SCARFACE T 11.8 55 12.7 8,024 14385 90.0 BIEBER T 17.2 18.3 4,251 14505 108.2 LITTLE VALLEY 18.3 13.7 4,235 14525 140.2 LODGE POLE 13.7 4,338 14545 163.6 WESTWOOD 13.7 7,942 14565

Radio Channel No. 66 in service.

UPRR Radio Channel 27 in service at Keddie.

UPRR Dispatcher Tone 15

	Radio Call-In					
Hamaker - 61(X)	Klamath - 62(X)	Malin - 41(X)				
Tionesta - 42(X)	Bieber - 51(X)	Big Valley - 52(X)				
Little Valley - 53(X)	Halls Flat - 54(X)	Westwood - 62(X)				
Almanor - 63(X)	Crescent - 64(X)	Keddie - 65(X)				
Emergency - 911						
Dispr X=0, Mechanic	cal X=2, Field Support X=3	3, Warm Bearing X=5				

Train Dispatcher Phone Numbers

0700 - 1500, Monday—Friday, (817) 234-1722, Fax (817) 234-7451 1500 - 0700, Monday—Friday and Saturday Sunday,(817) 234-6454, Fax (817) 234-6467

1. Speed Regulations

1(A). Speed—Maximum

	Freight
MP 0.0 to MP 202.8	49 MPH.

1(B). Speed—Permanent Restrictions

MP 14.8	8 to MP 1	5.1 (HE	R)	40 MF	'Η.
MP 31.	1 to MP 3	31.4		30 MF	Ή.
MP 93.7	7 to MP 1	124.3		25 MF	Ή.
MP 124	.3 to MP	126.0.		40 MF	Ή.
MP 136	3.3 to MP	165.7.		40 MF	Ή.
MP 165	.7 to MP	188.8.		25 MF	Ή.
MP 188	8.8 to MP	196.8.		40 MF	Ή.
MP 196	.8 to MP	202.8.		20 MF	Ή.

1(C). Speed—Switches and Turnouts—None

1(D). Speed-Other

On sidings	10 MPH.
Almanor Railroad	5 MPH.

Between MP 178 and MP 188 - Southward trains exceeding 3,500 tons must utilize the balanced braking method of controlling speed as described in Air Brake and Train Handling Rule 103.7.4.

Between MP 196.8 and MP 197.8 Item 1A of System Special Instructions applies to all trains.

See Item 1 of the System Special Instructions for additional speed restrictions.

Cold Weather Speed Restrictions - When temperatures are below -10 degrees Fahrenheit, the applicable restrictions will apply:

- 40 MPH for trains exceeding 100 tons per operative brake

2. Bridge and Equipment Weight Restrictions Maximum Gross Weight of Car

Bieber Line Jct. to Keddie 143 tons, Restriction B

3. Type of Operation

TWC—in effect: MP 3.0 to MP 202.8

4. General Code of Operating Rules Items

Rule 1.47—In addition to the requirements of General Code of Operating Rule 1.47 and to the Signal Switch Awareness Form, the Conductor must do the following:

After passing the last station, but at least 2 miles from the limits of authority granted by a Track Warrant, the Conductor must review Track Warrant(s) that his/her train is operating under with the Engineer and the Engineer must verbally acknowledge understanding of all items on the Track Warrant(s). After receiving verbal acknowledgment from the Engineer, the Conductor will enter the time, date, and his/her initials on the Track Warrant(s).

Before departing from a siding or when holding the main track at a station before departing that station, the Conductor must review Track Warrant(s) that his/her train will be operating under with the Engineer and the Engineer must verbally acknowledge understanding of all items listed on the Track Warrant(s). After receiving verbal acknowledgment from the Engineer, the Conductor will enter the time, date, and his/her initials on the Track Warrant(s).

All Track Warrants and Signal/Switch Awareness Forms must be submitted to the proper authority at the completion of each tour of duty.

Rule 5.8.2—Within the state of California, sound the whistle approaching all crossings, public and private.

Rule 6.19—When flagging is required, the distance will be 2.0 miles.

Rule 6.28—in effect: MP 0.0 to MP 3.0

ABTH Rule 100.13—All Southbound trains will perform a running air brake test between MP 147 and MP 167.

5. Trackside Warning Detectors (TWD)

- A. Protecting Bridge, Tunnel or other Structures: None
- B. Other TWD Locations

MP 19.6—HBD/DED—Recall Code 8
MP 50.3—HBD/DED—Recall Code 8
MP 68.6—HBD/DED—Recall Code 8
MP 87.6—HBD/DED—Recall Code 8
MP 92.4—DED/Exception Reporting
MP 97.4—DED/Exception Reporting

MP 107.4—HBD/DED—Recall Code 8

MP 112.2—DED/Exception Reporting

MP 118.9—DED/Exception Reporting

22 NORTHWEST DIVISION—No. 3—April 26, 2006—Gateway Subdivision

MP 125.8—DED/Exception Reporting

MP 135.2—HBD/DED—Recall Code 8

MP 167.2—HBD/DED—Recall Code 8

MP 171.2—DED/Exception Reporting

MP 176.2—DED/Exception Reporting

MP 182.2—DED/Exception Reporting

MP 187.4—DED/Exception Reporting MP 195.6—HBD/DED—Recall Code 8

MP 195.6—RECAII Code

MP 197.2 to MP 200.2—Slide Fence

Signal Indication:

Flashing Lunar (normal)

Solid Lunar or dark (fence activated)

MP 201.9—DED-Exception Reporting (Transmits on the BNSF and UPRR radio channels simultaneously).

6. FRA Excepted Track—None

7. Special Conditions

Remote Control Operations—Signs located at MP 0.0 and MP 3.0, (Gateway Subdivision) designate the Remote Control Area at Klamath Falls. This includes White Line Industrial Spur.

Klamath Falls, White Line Yard—Staub Spur (Track 9119) from the switch to end of the spur is 2 MPH. Handle only Staub cars on the spur.

Tionesta—6-axle engines may work beyond the derail.

Crescent Mills—Track 9981 is out of service beyond red flag.

Clear Creek Junction—Southward trains may enter these tracks only with locomotives and cars to be set out or picked up.

Between MP 147.2 and MP 202.8—When the power-on light on the exterior of a signal house is not lit, immediately notify the train dispatcher.

EXCEPTION: Crossing at MP 147.2 which is solar powered.

Approaching Tunnel No. 2—All trains must approach Tunnel No. 2, MP 202.03, prepared to stop short of fouled track.

Sidings—The following sidings may be used by loaded coal trains or trains exceeding 100 TOB: Little Valley, Halls Flat, Almanor, and Moccasin.

When securing equipment in the following sidings, use the following chart in conjunction with ABTH Rule 104.14 to determine the appropriate number of handbrakes.

determine the appropriate number of nandbrakes.							
Siding	Most Restrictive Grade	Ascending or Desce N. Switch/Direction	nding Movement - S. Switch/Direction				
Merrill	.10	Descending	Ascending				
Stronghold	.10	Descending	Ascending				
Mammoth	.07	Ascending	Descending				
Kephart	.08	Ascending	Descending				
Scarface	.10	Ascending	Descending				
Lookout	.15	Descending	Ascending				
Bieber	.06	Ascending	Descending				
Little Valley	1.60	Descending	Ascending				
Halls Flat	1.37	Descending	Descending				
Lodge Pole	1.00	Descending	Ascending				
Westwood	1.50	Ascending	Descending				
Almanor	.50	Descending	Descending				
Greenville	1.00	Ascending	Descending				
Moccasin	1.00	Descending	Ascending				

Close Track Centers—The following locations have been identified as having close track centers of 13 feet or less. Employees will not ride the side of cars in these tracks unless the adjacent track is known to be clear:

Klamath Falls Yard between tracks 9409 and 9410 on the north end have 12'8" track centers.

Work Train Instructions—All work trains crews will conduct a job briefing with a BNSF Operating Officer (Representative can be from the Operating, Mechanical or Engineering Departments) at the beginning of their tour of duty and at intervals that do not exceed four (4) hours until the end of the tour of duty. Movements must not be made unless these briefings occur. All work trains operating must be operated with the ability to initiate an emergency application from the rear of train. All mountain grade train handling rules outlined under ABTH Rule 103.7 apply to work trains. All movements, including switching movements, must be made with the air brakes on all cars cut in and charged. All cars left standing on the main track (in addition to securing with hand brakes) will be left in emergency when locomotive is detached.

Train Inspection—A member of inbound crews on through trains operating cabooseless will give outbound train a roll-by inspection and advise outbound crew the condition of the train, unless outbound crew will not be immediately available or inbound crew is otherwise relieved of duties.

Tonnage limits from Bieber to Keddie-

Northward—All Trains—5,500 tons

Southward—Manifest/Intermodal Trains:

Without distributed power/helpers—7,000 tons With helpers/distributed power on rear—9,500 tons

With helpers/distributed power cut in—12,000 tons

Loaded Unit Bulk Commodity Trains:

As above, except with helpers/distributed power cut in—15,000 tons

Note: Helpers may also be cut in if tonnage is less than 9,500 tons

All tonnage restrictions have been removed for soutward trains bewtween MP 187.0 and MP 203.0.

Dynamic Brake Requirements for Southward Freight

Trains—Use the following chart to determine you meet the minimum requirements for operative dynamic brakes. This requirement is for the portion of the Gateway Subdivision from MP 178 to MP 188. Train must not proceed if minimum requirements are not met.

TONS PER OPERATIVE BRAKE (TOB)

Total Trailing Train	TOB 85	TOB 86	TOB 96	TOB 106	TOB 116	TOB 126	TOB 136
Tonnage	or	to	to	to	to	to	to
	less	95	105	115	125	135	145
4,000 or less	6	6	8	8	10	10	12
4,001 to 5,000	8	8	10	10	12	12	14
5,001 to 6,000	12	12	12	12	14	14	16
6,001 to 7,000	12	12	12	14	16	16	18
7,001 to 8,000	12	12	12	14	16	16	20
8,001 to 9,000	12	12	14	16	18	20	22
9,001 to 10,000	12	12	14	18	20	22	24
10,001 to 12,000	12	12	16	20	24	26	30
12,001 to 14,000	12	12	18	24	28	30	34
14,001 to 16,000	12	14	20	26	30	34	38

Total minimum operative axles of dynamic brake for trains (including helpers) is in the body of the table. When using this table to determine TOB, round the figures up to the next whole number. For example: 105.1 TOB becomes 106 TOB. For the purpose of this rule, the weight of locomotives with inoperative dynamic brakes is to be included in train's total trailing tonnage.

Rear End DP/Helper Trains—The first 10 car/platform ABTH rear-end DP/Helper restriction applies to all trains regardless of rated powered axles. A car 45 feet or less in length must not be coupled to a car 80 feet or longer in length anywhere in the train (this does not apply to multi-platform cars except those with individual platforms exceeding 80 feet in length, example-Twin Flat and AutoMax cars as designated by the System Special Instructions). There must not be a continuous block of 15 or more empty cars and/or platforms entrained anywhere in the train.

Critical Areas—Locations identified as "Critical Areas" (See System Special Instruction 33, Flash Flood Warnings).

MP 135.60 to MP 135.70 MP 142.75 to MP 142.85

Test Mile Location

Northward

MP 195.0 to MP 194.0

MP 193.0 to MP 192.0

MP 137.0 to MP 136.0

MP 135.0 to MP 134.0

Southward

MP 21.0 to MP 22.0

MP 23.0 to MP 24.0

MP 134.0 to MP 135.0

MP 136.0 to MP 137.0

8. Line Segments

Road Line Segments

Line Segment Limits

55 Bieber Line Jct. to Keddie


9. Locations Not Shown as Stations

Name	Miles - Location	Capacity Cars	Switch Opens
14300 Henley	3.4 south of Klamath Falls -MP 4.2	30	North
14312 Stonebridge	1.7 south of Merrill- MP 16.7	20	North
14332 Hannchen	4.7 south of Stronghold-MP 36.3	22	South
14348 Tionesta	6.0 south of Mammoth - MP 50.7	10	Both
14540 Clear Creek Jct.	3.3 south of Westwood- MP167.7	10	North
14563 Crescent Mills	2.6 north of Moccasin- MP 194.4	6	North


10. Grade Chart

ELEVATION IN FEET

4600 44000 4200 3800 3600 3400 3200 2800 2800 2600

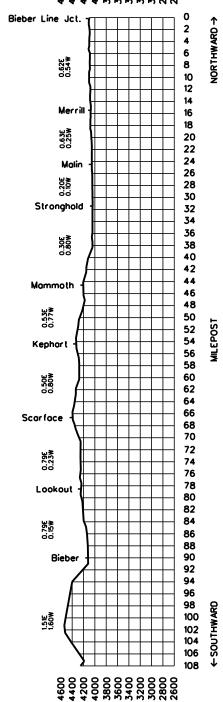

ELEVATION IN FEET

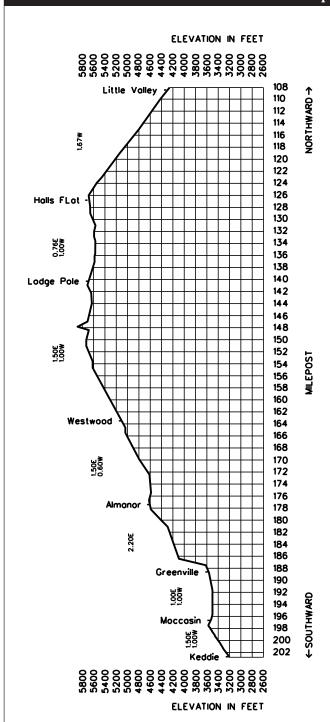

SOUTHWARD	Length of Siding (Feet)	Station Nos.	Mile Post	Kettle Falls Subdivision BRANCH LINE STATIONS	Rule 4.3	Type of Oper.	Line Segment	Miles to Next Stn.	↑ NORTHWAR
*		62050	64.2	CHEWELAH		Rule 6.28		7.7	D
	4,200	62043	56.5	VALLEY				18.1	
		62025	38.4	LOON LAKE			376	12.0	
		62012	26.4	DEER PARK				12.6	
		61963	13.8 1463.6	DEAN		TWC		4.5	
		61968	1468.1	MEAD				4.9	
		61972	1473.0	HILLYARD			37	3.7	
			1476.7	NAPA ST.	MJX			63.5	

Radio Channel # 76 in service between MP 64 and Napa Street

Radio Call-In		
Kettle Falls - 10(X) AAR 76		
Emergency - Call 911		
Dispr X=0, Mechanical X=2, Field Support X=3, Warm Bearing X=5		

Train Dispatcher Phone Numbers

(817) 234-1609, Fax (817) 234-1610

1. Speed Regulations

1(A). Speed-Maximum

		Freight
MP 60.5 to MP 1476	7	40 MPH.

1(B). Speed—Permanent Restrictions

MP 64.0 to MP 58.0	20 MPH.
MP 58.0 to MP 56.1	25 MPH.
MP 56.1 to MP 39.1	10 MPH.
MP 39.1 to MP 36.2	25 MPH.
MP 36.2 to MP 31.8	10 MPH.
MP 31.8 to MP 22.3	25 MPH.
MP 22.3 to MP 18.4	10 MPH.
MP 18.4 to MP 13.8	25 MPH.
MP 13.8 to MP 1466.2	35 MPH.
MP 1466.2 to MP 1475.4	25 MPH.
MP 1475.4 to MP 1476.7	10 MPH.

1(C). Speed—Switches and Turnouts

Through all switches and turnouts	10 MPH.
Mead, over switches and frogs on curves at Aluminum Plant	5 MPH.

1(D). Speed—Other

On sidings	10 MPH.
MP 64.0 to MP 58.0, Old Main Line	20 MPH.
Item 1(A) of the System Special Instructions applies.	

Temperature Restrictions

Between Chewelah and Napa Street, all train speeds must be reduced 10 MPH below maximum posted speed (but in no case below 10 MPH) when ambient temperature exceeds 80 degrees Fahrenheit. Trains 100 TOB and over do not exceed 35 MPH.

Item 1(A) of the System Special Instructions is in effect while complying with the above temperature restriction.

See Item 1 of the System Special Instructions for additional speed restrictions.

2. Bridge and Equipment Weight Restrictions Maximum Gross Weight of Car

Chewelah to Napa St.143 tons, Restriction D Six-axle locomotives and derricks are not permitted.

3. Type of Operation

TWC—in effect:

MP 58.0 to MP 1476.7

4. General Code of Operating Rules Items

Rule 6.19—When flagging is required, distance will be 1.0 mile.

Rule 6.28—in effect:

MP 64.2 to MP 58.0

5. Trackside Warning Detectors (TWD)—None

- A. Protecting bridges, tunnels or other structures: None
- B. Other TWD locations:

MP 31.5—Recall Code 345

6. FRA Excepted Track

Safeway Lead including all track plus Food Services Lead and all trackage on Tosco Lead. At Mead, all industry track leading to Kaiser Aluminum. All Trackage on Spike Yard Lead in Zone 11. See GCOR Rule 6.12

7. Special Conditions

Chewelah—The main track and siding between MP 60 and MP 64 are the designated interchange tracks with the KFR. When delivering trains to the KFR, a copy of the wheel report must be left in the mailbox at either end of the siding at Chewelah.

Between Valley and Dean—Trains on descending grade will slow or control their speed in accordance with Air Brake and Train Handling Rule 103.6.3,F.

Test Mile Location-MP 82.0 to MP 83.0

Flash Flood Warnings—Refer to Item 33 of the System Special Instructions. The following locations have been identified as "critical areas" and are limited to restricted speed:

MP 62.4 to MP 62.0

MP 54.8

MP 45.81

MP 20.0 to MP 19.0

8. Line Segments


Road Line Segments

Line Segment Limits

376 Chewelah to Mead 37 Mead to Napa St.

9. Locations Not Shown as Stations

Name		Miles - Location	Capacity Cars	Switch Opens
61963	Dean Spur	At Dean	18	South
62042	Lane Mtn. Silica Spur	1.0 south of Valley	29	Both
62034	Cline	8.1 south of Valley	18	Both

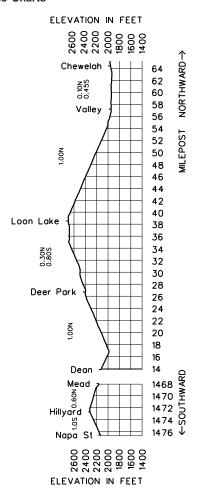

W									4
WESTWARD	Length of Siding	Station	Mile	Lakeside Subdivision MAIN LINE	Rule	Type of	Line	Miles to Next	w
♦	(Feet)	Nos.	Post	STATIONS	4.3	Oper.	Segment	Stn.	A R D
		01877	1.1	SUNSET JCT.	J			1.6	
	12,641	63002	2.6	EMPIRE				6.4	
		63007	9.3	MARSHALL To PCC Railroad MP 1.0	Т			2.6	
		63009	11.8	LAKESIDE JCT.	J			4.8	
		63014	16.6	CHENEY To PCC Railroad MP 1.0	Т			3.2	
	8,100	63019	19.8	BABB				9.9	1
	8,100	63028	29.7	FISHTRAP		стс		12.5]
	8,100	63040	42.4	SPRAGUE		010		8.9	1
	8,800	63048	51.1	KEYSTONE				6.7	
	8,100	63054	57.8	TOKIO				7.1	
		63062	64.9	RITZVILLE				7.6	1
	8,800	63066	69.3	ESSIG				3.2	1
	8,100	63072	72.5	PAHA				9.5	1
		63079	80.5	LIND				5.0	
		63082	84.9	SAND			46	5.9]
			90.8	BEATRICE	X(2)	2MT CTC		6.9	
			97.7	CUNNINGHAM				12.0]
	8,110	63108	109.7	CONNELL				4.3	
	8,100	63113	114.9	CACTUS				5.2	
		63117	118.2	MESA		CTC		8.4	
	8,100	63124	126.3	ELTOPIA				9.9	
		63135	137.0	GLADE		2MT		3.2	
			140.2	PASCO EAST	MX(2)	CTC		1.9	
			142.1	COUGAR	MX	2MT		0.6	
			142.7	HUSKY	MX	ABS		2.6	
			145.3	GRAPEVINE	MX(2)			0.3	
		12143	145.6	PASCO	BMJTY			1.7	
			146.3	WEST WYE	MJ	ABS			
		12148	147.5	SP&S JCT.	MJ			149.4	

Radio Channel No. 70 in service.

From MP 1.1 to MP 11.8, Channel 76 in service and from MP 140.2 to MP 147.5, Channel 89 in service.

Radio Call-In		
Fishtrap - 61(X) Tokio - 57(X)		Lind - 62(X)
Connell - 63(X)	Hatton Canyon - 65(X)	Pasco - 64(X)
Emergency - Call 911		
Dispr X=0, Mechanical X=2, Field Support X=3, Warm Bearing X=5		

Train Dispatcher Phone Numbers

(817) 234-1619, Fax (817) 234-1620

1. Speed Regulations

1(A). Speed—Maximum

	Passenger	Freight
MP 1.1 to MP 145.6	79 MPH	. 60 MPH.
Exception to System Special Instructions, Item	1, Speed Restr	rictions:

Trains consisting entirely of loaded double stack equipment may operate at 60 MPH if not exceeding 105 TOB.

1(B). Speed—Permanent Restrictions

MP 1.0 to MP 1.7	25 MPH	25 MPH.
MP 1.7 to MP 8.4	55 MPH	55 MPH.
MP 8.4 to MP 11.7	40 MPH	35 MPH.
MP 11.7 to MP 11.9	35 MPH	35 MPH.

		Passenger	
	MP 11.9 to MP 15.3		
	MP 15.3 to MP 16.8 MP 22.5 to MP 26.2		35 IVIPH.
	MP 26.2 to MP 27.5		
	MP 27.5 to MP 27.8	. 65 MPH.	
	MP 27.8 to MP 28.4		45 MPH.
	MP 31.9 to MP 40.4		
	MP 40.4 to MP 42.4		
	MP 42.4 to MP 43.9 MP 43.9 to MP 44.5		
	MP 44.5 to MP 48.5		
	MP 61.1 to MP 61.3	. 70 MPH.	
	MP 64.4 to MP 65.2		40 MPH.
	MP 65.2 to MP 67.0		
	MP 67.0 to MP 68.1 MP 68.1 to MP 69.2		
	MP 69.2 to MP 70.5		55 MPH
	MP 70.5 to MP 75.5		
	MP 75.5 to MP 77.5	. 70 MPH	55 MPH.
	MP 77.5 to MP 79.8		
	MP 79.8 to MP 86.6		
	MP 86.6 to MP 90.5 MP 90.5 to MP 92.5		
	MP 92.5 to MP 96.5		
	MP 96.5 to MP 101.3		
	MP 101.3 to MP 108.0	. 35 MPH	35 MPH.
	MP 108.0 to MP 111.2		
	MP 111.2 to MP 112.9		
	MP 112.9 to MP 114.6 MP 114.6 to MP 114.9		
	MP 116.0 to MP 116.4		55 IVIF IT.
	MP 119.0 to MP 121.5		
	MP 125.5 to MP 125.8	. 75 MPH.	
	MP 130.1 to MP 131.3		
	MP 138.3 to MP 145.6		
	MP 145.6 to MP 146.6 MP 146.6 to MP 147.5		
1(C).	Speed—Switches and Turnouts		
	Through switches and dual control turnouts at the following locations:		
	Through West Yard Lead at Cougar	. 10 MPH	10 MPH.
	Through East Yard Lead at Husky	. 10 MPH	10 MPH.
	Through West Yard Ladder Track at Husky	. 10 MPH	10 MPH.
	Through Yard Track West Receiving 2 at Husky . Cheney, East Yard Lead at Pasco	. 10 MPH	10 MPH.
	Turnout at MP 144.7		
	Grapevine Lead, West Yard Track 2 and the	. 10 1011 11	10 1011 11.
	Balcom and Moe Industry Switch at		
	Control Point Grapevine (Pasco)	. 10 MPH	10 MPH.
	Lakeside Jct., Babb, Fishtrap, Sprague,		
	Keystone, Tokio, Essig, Paha, Connell,	OF MOLL	OF MDLI
	Cactus, Eltopia, Pasco East,		
	Through crossovers at Beatrice		
	Through crossovers at Pasco East		
	(MT 1 to MT 2 and MT 2 to MT 1)		
	Control Point Granovino (Passo)		
	Control Point Grapevine (Pasco)	. +U IVICT	40 NIPA.
	Trains over 100 TOB	. 35 MPH	35 MPH.
	Through crossover at Grapevine		
	Trains over 100 TOB	. 35 MPH	35 MPH.
	Sand, Cunningham and Glade	40 MPU	40 MPU
	Trains over 100 TOB Through crossover Marshall to Scribner		
	Through crossover maishan to ochbrief	. 20 1011 11	25 WII 11.
1(D).	Speed—Other Passa Vard Engines thru the master and group		
	Pasco Yard—Engines thru the master and group retarders	. 8 MPH	8 MPH
	Head end westward trains or engines		
	leaving siding over Clark St. Crossing		
	MP 110.0 Connell	. 25 MPH	25 MPH.
	On sidings at the following locations: Babb, Fishtrap, Sprague, Keystone, Tokio,		
	Essig, Paha, Connell, Cactus, Eltopia,	. 35 MPH	35 MPH
	On other sidings		
	Pasco, Main 3, MP 146.1 to MP 146.6		

Trains over 100 TOB must not exceed 25 MPH through turnouts shown to exceed that speed unless otherwise specified.

Temperature Restrictions

All train speeds must be reduced 10 MPH below maximum posted speed (but in no case below 10 MPH) when ambient temperature exceeds 90 degrees Fahrenheit. Trains 100 TOB and over do not exceed 35 MPH.

See Item 1 of the System Special Instructions for additional speed restrictions.

Bridge and Equipment Weight Restrictions Maximum Gross Weight of Car

Sunset Jct. to Pasco 143 tons, Restriction A Basin City Stub 143 tons, Restriction D

Six-axle locomotives and six-axle derricks are not permitted on the east 500 feet of the Greens track at Ritzville.

Type of Operation

CTC-in effect:

MP 1.1 to MP 140.2

Multiple Main Tracks-in effect:

2 MT

MP 84.9 to MP 99.4

MP 137.0 to MP 145.3

ABS-in effect:

MP 140.2 to MP 147.5

Rule 9.15-in effect:

MP 140.2 to MP 147.5 on MT 1

MP 140.2 to MP 145.6 on MT 2

MP 145.6 to MP 146.6 on MT 3

MP 145.5 to MP 145.7 on East Side Pocket Track 549

Yard Limits—in effect:

MP 140.2 to MP 147.5

General Code of Operating Rules Items

Rule 6.19—When flagging is required, distance will be 2.5 miles.

Rule 6.28—in effect:

Marshall MP 0.0 to MP 1.0 (Former P&L)

Cheney MP 0.0 to MP 1.0 (Former CW)

Pasco MP 0.0 to Ainsworth Jct. MP 2.7 (Walla Walla Ind. Lead)

ABTH Rule 106.1—that part reading:

Crews working all other trains must isolate excess units, but not more than 0.5 HPT below scheduled HPT.

is changed to read:

Crews working all other trains must isolate excess units, but not more than 0.5 HPT below scheduled HPT, and not below 1.0 HPT.

Test Mile Locations

MP 35.0 to MP 36.0

MP 132.0 to MP 133.0.

Trackside Warning Detectors (TWD)

Protecting bridges, tunnels or other structures: None

Other TWD locations

MP 6.1—DED/Exception Reporting

MP 14.3—DED/Exception Reporting

MP 19.2—DED/Exception Reporting

MP 25.7—Recall Code 617

MP 31.4—DED/Exception Reporting

MP 36.5—DED/Exception Reporting

MP 41.3—DED/Exception Reporting

MP 47.8—Recall Code 618

MP 52.8—DED/Exception Reporting

MP 57.4—DED/Exception Reporting

MP 62.5—DED/Exception Reporting

MP 66.9—Recall Code 627

MP 72.5—DED/Exception Reporting

MP 78.4—DED/Exception Reporting

MP 82.3—DED/Exception Reporting MP 88.8—DED/Exception Reporting

MP 94.2—Both Tracks—Recall Code 628

MP 99.5—DED/Exception Reporting MP 104.6—DED/Exception Reporting

MP 108.2—DED/Exception Reporting

MP 112.4—DED/Exception Reporting

MP 118.8—DED/Exception Reporting MP 122.3—Recall Code 638

MP 122.5-Wheel Impact Detector-No Readout

MP 126.3—DED/Exception Reporting

MP 130.5—DED/Exception Reporting

MP 134.6—Recall Code 648, Transmitted on Radio

Channels 70. Trains on Radio Channel 89 must monitor

Channel 70 for detector broadcast.

MP 138.7—DED/Exception Reporting (both tracks)

Transmitted on Radio Channels 70 and 89.

FRA Excepted Track

In Pasco Yard, storage tracks 5 through 16, including switches to these tracks.

City lead in Zone 3, from fouling point of switch at MP 146.2.

Big Pasco in Zone 4, from fouling point of switch at MP 146.7.

All tracks of the Old Roundhouse facility at Pasco.

7. **Special Conditions**

PCC RR—The Palouse River and Coulee City Railroad (PCC) is designated Main Track with restricted limits between MP 1.0 and MP 3.5. This portion of track is also designated as an interchange track.

PCC General Orders and current Timetable are available in the Trainmaster's office at Spokane. All applicable General Orders should be reviewed before pickup of interchange cars. When departing from Pasco, crew van will haul copy of Timetable and General Orders in effect to train crew at Cheney.

Cheney—When switching ADM Mills, on track 2216, engines are not allowed past spot one in the mill shed. Engines may NOT access the wheat pit track 2215 through the mill shed on track 2216. You must use track 2215 south of the mill shed to spot or pull cars from the wheat pit.

There is no clearance on the north and south sides of track 2216 and on the north side of track 2215 because fall protect beams have been installed.

Pasco—All trains prior to arriving Pasco will use BNSF Radio Channel 89 to communicate with Pasco Control Operator and Yardmaster when requesting a yard track. After requesting vard tracks, obtain permission from Pasco Tower before entering yard. Trains and engines will not initiate movement on Main 1, Main 2, Main 3, or East Side Pocket track without permission from Pasco Control Operator.

All trains, engines, and MW employees will secure authority from Pasco Control Operator before entering or fouling Main 1, Main 2, Main 3, and East Side Pocket tracks. Trains and engines may act on verbal track permit authority before occupying or fouling Main 1. Main 2. Main 3. or East Side Pocket tracks. Track Permit authority must be obtained by MW employees from Pasco Control Operator before occupying track between outer opposing signals of all Manual Interlockings within Pasco Yard limits.

Pasco Roundhouse-Power derails are in operation on the East and West ends of the Pasco Roundhouse and the Fueling Facility leads. Before entering or departing the roundhouse facility, contact the service Foreman for permission to proceed. When in a derailing position, a blue strobe light will flash and a blue target will be displayed.

Pasco East Receiving Yard—Power derails are in place on all tracks in the east yard and display a blue light when in the derailing position and a yellow light when lined for rail traffic. The derails are powered and are under the control of the Pasco Tower

Pasco—Power Operated Yard Switches—Power operated switches in Pasco Yard numbered:

- 12. 16. 18. 20. 22-Ice House
- 82, 86, 92, 98-East Yard-West Yard Lead
- 94, 96, 100, 102, 104, 106, 108, 110—East Yard—West End
- 1, 2, 3, 4-East Yard-East End

are known as convenience switches that only indicate direction switches are lined. A green or yellow light indicates which direction the switch is lined, but does not indicate the route is clear of a conflicting movement. To prevent side collisions, you must watch for cars or engines that may foul your movement.

In the absence of a green or yellow light, movement must not be made over switches until permission is received from proper authority and crew member precedes movement over switch checking to ensure that the switch is properly aligned and that the switch points fit.

Caution—Should a red light be displayed, the control operator must be notified and a maintainer called.

Walla Walla Industrial Lead—Power Operated Yard Switches—Power operated switches named:

- Big Barn Switch
- East End Fueling Facility
- East End of Wye Track

are known as convenience switches that only indicate direction switches are lined. A green or yellow light indicates which direction the switch is lined, but does not indicate the route is clear of a conflicting movement. To prevent side collisions, you must watch for cars or engines that may foul your movement.

In the absence of a green or yellow light, movement must not be made over switches until permission is received from proper authority and crew member precedes movement over switch checking to ensure that the switch is properly aligned and that the switch points fit.

These switches must not be taken from power to hand without permission from the Pasco control operator.

Caution—Should the switch points be other than full normal or full reverse, it will be necessary to hand operate the switch.

The WCHT-72 can be operated manually by bypassing the proper solenoid valves and operating the hand pump with the manual lever.

The solenoid valves are placed in the bypass position by gently pressing on the red knurled knob on the valve and then rotating the knob counterclockwise while releasing downward pressure on the knob. The knob will spring outwards to the bypass position.

To place the valve back into the operate position, gently press down on the red knurled knob, and rotate the knob clockwise. When downwards pressure is released, the knob will stay in position. The manual pump lever is stored in a lockable holder on the rear face of the switch machine cover.

To manually operate to the extended position (points going away from the switch machine):

- 1. Remove manual pump lever from holder.
- 2. Open door.
- 3. Operate both solenoid valves to the bypass position.
- Insert lever into pump socket and pump switch into position.
- 5. Remove lever.
- 6. Return both solenoid valves to the operate position.
- 7. Occupy switch and after at least one unit or car has passed over the switch points.
- 8. Close door and replace manual lever into holder.

Note: Take care when replacing pump lever into holder. Place pump lever with stamped lettering "This side up for lock-out" facing out for normal operation.

To manually operate to the retracted position (points going toward the switch machine):

- 1. Remove manual pump lever from holder.
- Open door.
- 3. Operate right solenoid valve to the bypass position.
- Insert lever into pump socket and pump switch into position.
- 5. Remove lever.
- 6. Return right solenoid valve to the operate position.
- 7. Occupy switch and after at least one unit or car has passed over the switch points.
- 8. Close door and replace manual lever into holder.

Note: Take care when replacing pump lever into holder. Place pump lever with stamped lettering "This side up for lock-out" facing out for normal operation.

To Lock Out WCHT-72 Switch Machine

Switches must not be taken from power to hand without permission of the control operator.

- 1. Remove manual pump lever from holder.
- Replace manual pump lever into holder with stamped lettering "This side up for Lock-Out" facing up.

To Restore Locked Out WCHT-72 Switch Machine

- 1. Remove manual pump lever from holder.
- Replace manual pump lever into holder with stamped lettering "This side up for Lock-Out" facing out.

Notify control operator when switch has been restored to normal operation.

Between Pasco East and SP&S Jct.—Controlled signals are under the jurisdiction of the Pasco Control Operator.

Remote Control Area—Signs located at MP 2.7 (Burbank Subdivision including Martindale Industrial Lead), MP 137.0 and MP 147.5 (Lakeside Subdivision), designate the Remote Control Area at Pasco.

Remote Control Zone—Receiving tracks 2210, 2211, 2212, 2213 and 2214 including lead to hump crest are designated as five individual Remote Control Zones (RCZ) at Pasco yard.

Activation/Deactivation Procedure—Remote Control Operator will contact Tower Operator and request that Remote Control Zone protection be established after remote control locomotive has cleared in receiving track where protection is desired. Tower Operator will line east end of the east receiving track switch away from track and provide switch blocking including switches on hump crest lead. After this process has been completed the Tower Operator will notify the remote control operator that the Remote Control Zone has been activated. Remote Control Zone will remain activated until remote control operator has requested that the Remote Control Zone be deactivated. Before receiving tracks 2210 through 2214 including lead to hump crest can be fouled or occupied, The Tower Operator must be contacted to determine if the Remote Control Zone has been activated.

Templin Terminals—This is a circular track (balloon) approximately 7200 feet in length. Cars may be set out going in either direction. Electric locks are located at MP 62.59 and MP 62.86 for access. There are switch point derails located on the east and west turnout tracks between main line switches and inside crossover switches.

Ritzville—When spotting the elevator do not leave any cars between Jefferson and Adams Streets (the two west crossings).

All westbound trains on the siding at Ritzville, make sure the gates are down before entering Columbia Street Crossing.

Crew Switching at CFI Industries—All crews switching at CFI Industries at Tokio must be equipped with a half mask respirator (equipped with ammonia cartridges). This half mask may be worn with prescription glasses and must be worn when switching inside the gates of the plant.

Any employee called for Train LNWE8301, who has not been fitted for a respirator, must report to work one-half hour early, clean shaven in order to be properly fitted with a respirator.

Sprague—When stopping on the mainline at Sprague, do not block the Old Highway Crossing for any period of time exceeding five (5) minutes between the hours of 0715-0815 hours and 1530-1630 hours. The crossing must be cut if necessary.

Missile Base-Mainline Rock and Ballast Pit—This is a circular track (balloon) approximately 4,900 feet in length. Cars may be set out going either direction. Derails are set inside clearance points.

Locations With a Grade Equal to or Greater Than 1%

MILEPOST		PERCEN	T OF GRADE
MP 3.0 to M	P 8.8	(Includes	1.25% Ascending Empire)
MP 10.8 to M	IP 11.1	1.06%	Ascending
MP 12.5 to M	IP 14.0	1%	Ascending
MP 32.0 to M	IP 34.5	1.06%	Ascending
MP 38.0 to M	IP 40.0	1.06%	Descending
MP 78.4 to M	IP 78.7	1%	Descending
MP 90.0 to M	IP 95.0		
(Both Track	ks)	1%	Descending
MP 96.5 to M	IP 97.1		
(Both Track	ks)	1%	Descending

Dynamic Braking—In order to comply with minimum dynamic brake requirements for trains on the Hi Line, Stampede, and Scenic Subdivisions, crews on such trains, before departing Seattle (Interbay), Tacoma, Havre, Sandpoint (if originating from MRL RR), Spokane (if train originates at Spokane), or Pasco (if train originates at Pasco), must:

- Inspect locomotive consist before departing locations outlined above and determine if any locomotives in consist have dynamic brakes cut out and/or are tagged defective. (Cut out traction motor(s) on DC locomotives results in inoperative dynamic brake). NOTE: Before cutting in a dynamic brake found cut out but not tagged defective, contact Mechanical Help Desk and be governed by that supervisor's instruction.
- If any locomotive in consist found not to have an operative dynamic brake, immediately report this fact to local mechanical forces and Mechanical Help Desk.
- Any dynamic brake failure that occurs enroute thereafter must be reported to the Mechanical Help Desk.
- A dynamic brake inspection of the consist is not required if an inspection report has been left on the controlling locomotive.

Dynamic brake limitation is now at 28 axles per consist for all trains on the BNSF, per Air Brake & Train Handling Rule 103.2.1, Item B. When mechanical personnel makeup locomotive consist and/or perform daily inspection of locomotive consists:

- Where locomotive consists are make up by mechanical personnel, mechanical personnel will set up locomotive consist in compliance with 28 axle dynamic brake limitation (if more than 28 rated DB axles in consist) along with the other consist set up procedures for each locomotive in the consist.
- During that inspection, mechanical personnel note all defective dynamic brakes in consist when consist is initially made up and leave this information on controlling locomotive for the locomotive engineer.
- Local terminal operating supervision at Havre, Spokane and Seattle will communicate to mechanical personnel the minimum dynamic brake requirements for locomotive consist being built for trains requiring a minimum number of DB axles for the heavy grade territories.

Flash Flood Warnings—Refer to Item 33 of the System Special Instructions. The following locations have been identified as "critical areas" and are limited to restricted speed:

MP 2.5

MP 3.3

MP 19.9 to MP 20.5

MP 69.0

MP 82.3

MP 97.0 to MP 98.0

MP 107.0 to MP 108.7

Recommended Roll-By Inspection Locations—

Glade—Pull train up to within 400 feet of the block signal. West Connell—Do not inspect from the north side. On the south side, pull train up beyond loading dock.

West Cunningham—Inspection only from the north side.

East Paha—Inspection only from the north side.

East Tokio—Inspection only from the north side.

West Sprague—Inspection only from the north side.

East Sprague—Inspection only from the north side.

East Babb—On the north side, inspect train from siding only.

Identifying Signals—In signaled territory, when a train is passing a signal displaying other than "Clear" in advance of a control point, a crew member must transmit the following by radio:

Train Identification (Initials, Engine Number and Direction) Signal Name - In advance of (Control Point Location), on (Track) at (Speed) MPH.

Example of transmission:

"BNSF 6301 South approach medium in advance of Napavine South on Main 1 at 50 MPH (on single track main track designation is not necessary).

Exception: Due to radio congestion, transmission will not be made between MP 140.2, Pasco East and MP 147.5, SP&S Jct.

8. Line Segments

Yard Line Segments

Line Segment Limits

684 Cactus 471 Pasco Hump 630 Pasco 631 Pasco WFE


Road Line Segments

Line Segment Limits

46 Sunset Jct. to Pasco

9. Locations Not Shown as Stations

Name		Miles - Location	Capacity Cars	Switch Opens
Fishtrap	Setout Track	1.0 west of Fishtrap	5	West
63034	Missle Base Ballast Pit	4.3 west of Fishtrap		Both
63039	Sprague Elevator Track	0.7 east of Sprague	20	Both
63039	Sprague Old Siding	0.2 east of Sprague	54	Both
Keystor Set Out	ne Siding t Track	1.7 west of Keystone	5	West
63053	Tokio-C&F Ind.	2.6 east of Tokio	20	Both
	Tokio-Williams Energy/Cenex	1.6 east of Tokio	10	West
	Templin Terminals		114	Both
Beatrice Set Out	e t Track MT 1	0.2 west of Beatrice crossover	5	East
Beatrice Set Out	e t Track MT 2	0.2 west of Beatrice crossover	5	East
63095	Cunningham (MT1) Setout	1.6 east of Cunningham	12	East
63095	Cunningham (MT2) Elevator Track	1.6 east of Cunningham	15	Both
63108	Connell Eastward Siding		Yard	Both
63108	Connell Westward Siding		40	West
63108	Lamb Weston Lead		18	East
63126	Eltopia Elevator Track	0.4 west of Eltopia	20	West
63131	Sagemoor	6.8 west of Eltopia	80	Both
Simplot	, #63117	0.6 east of Mesa	5	East
Potato	Growers #63135	1.3 west of Glade	12	West
Asphalt	t Plant #63135	1.4 west of Glade	12	Both

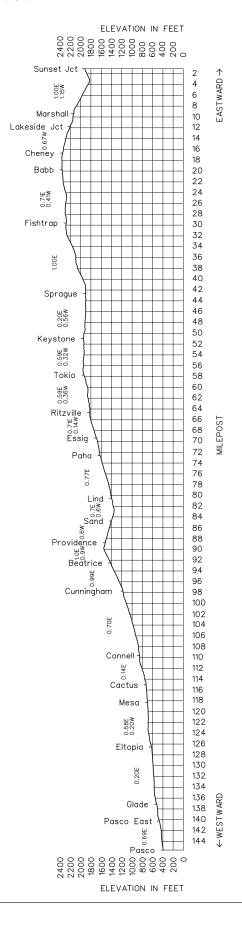

32 NORTHWEST DIVISION—No. 3—April 26, 2006—Newport Subdivision

WEST WARD	Length of Siding (Feet)	Station Nos.	Mile Post	Newport Subdivision BRANCH LINE STATIONS	Rule 4.3	Type of Oper.	Line Segment	Miles to Next Stn.	↑EASTWARD
		01809	1401.2	BOYER	JT			0.7	
		01803	1401.9	NORTH SANDPOINT	Т	TWC	37	6.9	
			1408.0	DOVER JCT.				7.6	

Radio Channel No. 54 in service. Yard Channel No. 70 UPRR Channel 42-42, UPRR Call-Up * 16, Emergency Call -911

Radio Call-In
Sandpoint - 48(X)
Emergency - Call 911
Dispr X=0, Mechanical X=2, Field Support X=3, Warm Bearing X=5

Train Dispatcher Phone Numbers

(817) 234-1609, Fax (817) 234-1610

UPRR Dispatcher Phone Numbers

(402) 636-1710 Weekdays, (402) 636-1709 Weekends

1. Speed Regulations

1(A). Speed—Maximum

	Passenger	Freight
MP 1401.2 to MP 1408.0	25 MPH	25 MPH.

1(B). Speed—Permanent Restrictions

UPRR MP 75.0 to UPRR MP 74.0 10 MPH. 10 MPH.

1(C). Speed—Switches and Turnouts

Dover Jct, UPRR MP 71.1 10 MPH. 10 MPH.

1(D). Speed—Other—None

See Item 1 of the System Special Instructions for additional speed restrictions.

2. Bridge and Equipment Weight Restrictions

Maximum Gross Weight of Car

Boyer to MP 1408.1143 tons, Restriction D

3. Type of Operation

TWC-in effect:

UPRR MP 75.0 to Dover Jct UPRR MP 71.1

4. General Code of Operating Rules Items

Rule 6.19—When flagging is required, distance will be 1.0 mile.

Rule 6.28—in effect:

East of West Switch on West Main to Main Track Switch of Kootenai River Subdivision, MP 1405.7 to MP 1408.1

5. Trackside Warning Detectors (TWD)—None

6. FRA Excepted Track—None

7. Special Conditions

BNSF trackage ends at MP 1408.1. Trains must not occupy tracks west of MP 1408.1 without permission of the POVA RR.

North Sandpoint—To minimize the time public road crossings are blocked, crews must contact the BNSF Boyer East dispatcher to determine whether movement eastward over the UP/BNSF diamond will be delayed prior to departing Division Avenue. When the Pole Yard Lead distant signal is less than clear, eastward movements must be stopped prior to Division Avenue Crossing.

North Sandpoint—Two derails in place on east leg of Sandpoint Yard wye.

Dover Junction to Newport—Do not operate beyond MP 1408.1 without permission from the Pend Oreille Valley Railroad designated employee and the trainmaster at Whitefish.

UPRR and **POVA RR**—BNSF mileposts are changed to UPRR mileposts between Boyer and Dover Jct., as follows:

BNSF MP 1401.0 becomes UPRR MP 75.0

BNSF MP 1402.0 becomes UPRR MP 74.0

BNSF MP 1403.0 becomes UPRR MP 73.0

BNSF MP 1404.0 becomes UPRR MP 72.0

BNSF MP 1405.4 becomes UPRR MP 71.1

The UPRR dispatches this branch line from MP 1405.7 to MP 1401.3 at Boyer Ave. The POVA RR dispatches this branch line from MP 1408.1 to Newport.

The UPRR portion is designated main track and the type of operation is TWC. This main track consists of the Pole Yard Lead, the West Leg of the Wye and the portion of the West Pass between the West Leg of the Wye and the Newport Main (Old GN Main). All other tracks in the Boyer Yard and North Sandpoint are considered other than main track. The track from former BNSF MP 1402.5 to MP 1408.1 remains main track.

8. Line Segments


Road Line Segments

Line Segment Limits

37 Boyer Ave. (UPRR MP 75.0) to BNSF MP 1408.1

9. Locations Not Shown as Stations

Name		Miles - Location	Capacity Cars	Switch Opens
61906	Dover (SI Conn)	3.3 west of N. Sandpoint	10	East

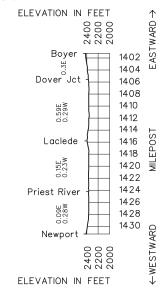

S O U T H Leng W of A Sidin D (Fee	g Station	Mile Post	New Westminster Subdivision MAIN LINE STATIONS	CROR Rule 6A	Type of Oper.	Line Segment	Miles to Next Stn.	↑ NORTHWAR
*	15126	155.3	CN JCT.	BYZ	ABS		1.5	D
	15125	153.8	STILL CREEK	Z			2.1	
	15123	151.8	WILLINGDON JCT.	Х			2.0	
		149.8	SPERLING	Х			1.8	
		148.0	PIPER	Х			1.6	
		146.4	LAKE CITY	Х			0.3	
		146.1	NORTH ROAD	Х	2 MT CTC		0.7	
		145.4	BRUNETTE	Х			0.1	
	15115	145.3	CP JCT.				0.2	
		145.0	BRAID			56	0.1	
	15114	144.8	NEW WESTMINSTER	BCY			0.3	
		144.5	SPRUCE				1.6	
	15111	141.3	FRASER RIVER JCT.		стс		1.4	
5,800 6,063	W 15109	139.5	BROWNSVILLE		CIC		2.6	
	15105	136.9	TOWNSEND		ABS		6.5	
	15100	131.1	COLEBROOK To Roberts Bank BCR 15.5		OCS CTC		10.8	
	15091	119.9	WHITE ROCK		ABS		0.3	
		119.6	USA CANADA BORDER		ocs		33.9	

Radio Channel No. 66 in service.

Radio Channel No. 31 in service in yard.

Radio Channel No. 28 in service at Barge Slip - Vancouver, BC

Radio Call-In					
New Wes	New Westminster RTC Calls: Main Line Channel				
Blaine - 071	New Westminster - 031	CN - 061			
Burnaby - 021					
New Westminster RTC Calls: Yard Channel					
New Westminster - 041 Vancouver - 051					
Emergency - Call 911					

RTC Telephone Number—(604) 520-5203

1. Speed Regulations

1(A). Speed—Maximum

1(B). Speed—Permanent Restrictions	
MP 155.3 to MP 154.0	40 MPH 25 MPH.
MP 154.0 to MP 152.8	40 MPH 30 MPH.
MP 152.8 to MP 147.4	50 MPH 30 MPH.
MP 147.4 to MP 145.5	45 MPH 30 MPH.
MP 145.5 to MP 141.5	20 MPH 20 MPH.
MP 145.5 to MP 143.7 Northward trains lined	
to west track once Spruce St. crossing	
is occupied	30 MPH 30 MPH.
MP 141.5 to MP 140.8 Fraser River Bridge	10 MPH 10 MPH.
Fraser River Bridge Switch No. 3 when lined	
for CN New Westminster Industrial Line	8 MPH 8 MPH.
MP 140.8 to MP 139.0	45 MPH 25 MPH.
MP 139.0 to MP 136.6	50 MPH 35 MPH.
MP 136.6 to MP 134.3	60 MPH 35 MPH.
MP 134.3 to MP 133.7	50 MPH 35 MPH.

MP 133.7 to MP 131.9 60 MPH. 35 MPH.

MP 131.9 to MP 131.6 40 MPH. 35 MPH.

MP 131.6 to MP 129.8 45 MPH. 35 MPH.

MP 155.3 to MP 119.6 60 MPH. 40 MPH.

	MP 128.3 to MP 127.8	15 MPH 35 MPH 60 MPH 21 MPH	35 MPH. 15 MPH. 35 MPH. 35 MPH. 21 MPH.
1(C).	Speed—Switches and Turnouts CN Jct. MP 155.3—through turnout Brownsville—on sidings	10 MPH stions: 35 MPH y; 12 MPH 10 MPH	10 MPH. 30 MPH. 12 MPH. 10 MPH. 20 MPH.
	Colebrook—through dual control turnouts Trains over 100 TOB must not exceed 25 MPH t exceed that speed.		
1(D).	Speed—Other Lake City CTC controlled location MP 146.4 Southward (HER) Bridges 127.6, 137.4, 140.8 cars heavier than 1 Track 11, New Westminster West Shore Terminals (Roberts Bank)—within fe of terminal CP Jct., north leg of wye Burrard Inlet Line	38 tonsnced area	10 MPH. 5 MPH. 5 MPH. 10 MPH.

See Item 1 of the System Special Instructions for additional speed restrictions.

2. Bridge and Equipment Weight Restrictions Maximum Gross Weight of Car

NOTE: Fraser River Bridge—Cars exceeding allowable maximum gross weight may only be handled with special permission from CN Operations Coordinator, Thornton Yard (604) 589-6663.

3. Type of Operation

Freight

Passenger

CTC—in effect:

MP 153.9 to MP 137.3

MP 131.5 to MP 130.8

ABS-in effect:

MP 155.3 to MP 153.9

MP 137.3 to MP 131.5

MP 130.8 to MP 119.6

OCS—in effect:

MP 137.3 to MP 131.5

MP 130.8 to MP 119.6

Yard Limits—in effect: MP 155.3 to MP 153.9

IVIP 155.3 10 IVIP 153.9

Multiple Main Tracks—in effect: 2 MT

MP 153.9 to MP 144.5

Locations Designated as Industrial Track

Vancouver, BC Burrard Inlet Line (BI Line)—CN Railway operates jointly with BNSF on BI Line between Vancouver Yard and Waterfront. Movements on BI Line are controlled by CN Waterfront Traffic Coordinator, Lynn Creek, who must be contacted before entering or fouling the BI Line. These instructions do not modify the provisions of CROR Rule 105.

Between Vancouver end of track and CN Jct.—CROR Rule 105 applies.

Between Tilbury Line Jct. (Townsend) MP 0.0 and Tilbury Island Dock MP 4.9—Train and engine movements on Tilbury Island Line will be made in accordance with CROR Rule 105. CN, CP and BNSF trains and engines switch on this line. Before leaving MP 3.5 (80th Street) on northward movements, contact BNSF RTC New Westminster, who will advise of any other movements being made on the line. This information does not modify provisions of CROR Rule 105.

Rail Traffic Controllers—Territory between USA Canada Border MP 119.6 and end of track at Vancouver, B.C. is under jurisdiction of BNSF RTC at New Westminster.

Vancouver Via Rail Coach Yard—Movements entering the limits of the Vancouver Maintenance Centre (VMC) Coach Yard must obtain permission, either by radio communication or personal contact, from the VIA Controller. When requesting permission to enter the limits of the VMC Coach Yard, the movement identification and the route to be used must be communicated to the VIA Controller. Trains departing Vancouver Station must obtain permission from the VIA Controller before commencing movement.

All movements must report clear when leaving the limits of the VMC Coach Yard. The standby channel of the VIA Controller is AAR Channel 61. Stop signs in addition to Coach Yard limit signs have been placed at the entrance to the limits of the VMC Coach Yard.

CN Jct.—Southward trains must obtain permission from RTC before passing north block signal at CN Jct. Trains and engines requiring use of the main track at CN Jct. for switching purposes must obtain permission from RTC before passing north block signal at CN Jct., and must report clear of main track when finished. After permission is received and switch is lined by hand for the intended route, movements will be governed by signal indication. Southward train or engine stopped by a Stop indication must not proceed until written authority has been received from RTC. Rule 509 is modified accordingly. Northward trains must advise RTC when clear of the main track at CN Jct.

Between CN Jct and Still Creek—The movement of trains and engines will be supervised by the RTC. Trains and engines must comply with RTC's verbal and written instructions.

Brownsville—Obtain permission from BNSF RTC New Westminster before fouling or entering controlled siding from auxiliary tracks. Notify BNSF RTC when clear of controlled siding on auxiliary tracks and switch properly lined for siding.

Colebrook—CTC between MP 131.5 and MP 130.8 is under jurisdiction of BC Rail Port Subdivision RTC at North Vancouver, AAR Channel 39 (3939*1#), telephone (604) 984-5255

All train and engine movements must contact BC Rail RTC for permission to enter CTC territory controlled by BC Rail RTC, regardless of signal indication. When requesting such permission, each train or engine movement must advise BC Rail RTC if they are handling dimensional shipment(s). Dimensional shipment(s) must not be set out or picked up in

CTC territory controlled by BC Rail RTC unless permission to do so has been obtained from BC Rail RTC.

TY&E personnel must use BC Rail CTC Authorization form, and Maintenance of Way personnel must use BC Rail Track Occupancy Permit (TOP) form, when obtaining authorities/permits on BNSF track controlled by BC Rail RTC, and on the BC Rail Port Subdivision.

Following are the identifiable locations which will be used on authorities/permits issued by the BC Rail RTC, along with the corresponding BNSF designations:

Signal Mile 131.5, North Controlled Block Signal North Colebrook

Signal Mile 7.7, South Controlled Block Signal North Colebrook Signal Mile 7.0, North Controlled Block Signal South Colebrook Signal Mile 130.8, South Controlled Block Signal South Colebrook

Signal Mile 7.8, BCR Controlled Block Signal governing eastward movement from BCR Roberts Bank Line to BNSF main track over BNSF dual control switch North Colebrook and BCR west dual control switch Mud Bay siding

Signal Mile 6.9, BCR Controlled Block Signal governing westward movement from BCR Roberts Bank Line to BNSF main track over BNSF dual control switch South Colebrook

North Junction Switch Colebrook, Dual control switch North Colebrook

South Junction Switch Colebrook, Dual control switch South Colebrook

In CTC territory controlled by BC Rail RTC, the provisions of Rule 568(b) apply at an electrically locked hand operated switch, except that permission to enter or re-enter the main track need not be in writing for a train or engine authorized by CROR Rule 566 or CROR Rule 567.

White Rock—Northward freight trains must report departure to RTC.

Blaine—Northward passenger trains must report departure to RTC

Interlockings and Drawbridges Not Indicated at Station Fraser River Bridge, New Westminster—Locally controlled interlocking. CROR Rule 609 applies. All movements approaching bridge will use AAR Channel 61 to contact bridge signalman if necessary, and monitor this channel until clear of the bridge.

Trains, if tandem, must not exceed 100 cars and must not disconnect while any portion of the train is within interlocking limits. Engine bell must be rung continuously approaching and within interlocking limits.

Swing span has been equipped with red warning signs at both ends. When in vertical position, these signs indicate that the span rail locks are disengaged and that movement must stop and be governed by further instructions from the bridge signalman. When required to move over bridge by other than signal indication, movements approaching the span must be prepared to stop clear of a red sign between the rails at either end of the span.

Drawbridge 69—3.4 miles south of Colebrook. Manual interlocking. CROR Rule 608 applies. When interlocking signals display Stop indication, a member of the crew will immediately call RTC and be governed by his instructions.

Maintenance of Way employees may occupy bridge between interlocking signals on verbal authority from bridge signalman, who must provide protection for movement until Maintenance of Way employee has reported clear of the limits.

Trains passing Bridge 69 must have one radio in the controlling

locomotive monitoring AAR Channel 66 until bridge signalman notifies passing train of results of roll-by inspection.

Automatic Interlocking Not Indicated at Station Heatley Diamond, Burrard Inlet Line (BI Line)- Interlocked crossing at grade with CPR main track. CROR Rule 611 applies. Train and engine movements at this location are governed by CROR Rules 421, 426, and 429 through interlocking limits. The route through the interlocking can be lined by the CN Waterfront Traffic Coordinator, Lynn Creek or by a crew member on the ground on either side of the interlocking.

When there is no conflicting movement evident on CPR main track, signal through interlocking can be requested by contacting CN Waterfront Traffic Coordinator, Lynn Creek or by operating key controller on signal mast. To use key controller, insert key, turn to right, hold for five seconds, return to center and remove. After one minute dual control switch on north side of interlocking will move to reverse position. Interlocking signal will not clear until movement occupies the circuit. This is necessary to allow for proper operation of Powell Street grade crossing warning devices and traffic signals.

Interlocking signal must not be requested until immediate movement is to be made. A proceed indication that is not used within three and one half minutes will time out to a Stop indication if CP Vancouver Terminal RTC has requested a signal on CP main track.

To cancel signal through interlocking, or to return dual control switch to normal position, turn key to the left, hold for two seconds, return to center and remove key. After one minute, dual control switch will return to normal position.

If stopped by a signal indicating STOP, and no conflicting movement is evident, a crew member must contact the CP Vancouver Terminal RTC. If unable to clear the signal, and permission has been received from the CP Vancouver Terminal RTC, CROR Rule 611 applies at the interlocking, and CROR Rule 104.2 applies at the dual control switch. Do not open the box marked "Switches" to operate the knife switch, nor place dual control switch in hand position without permission from CP Vancouver Terminal RTC.

If necessary to use the knife switch, unlock cabinet marked "Switches" and open knife switch. The required waiting period after opening knife switch is reduced to three minutes. After three minutes, operate dual control switch in accordance with CROR Rule 104.2, then close knife switch and lock cabinet.

If interlocking route is not requested or occupied, and dual control switch is in normal position, signals on CN switching lead will clear for lead route when movement activates circuit. If signals do not clear, use key controller to cancel a possible interlocking route request and wait one minute.

4. Canadian Rail Operating Rules Items Operations PNSE is governed by the Canadian

Operations—BNSF is governed by the Canadian Rail Operating Rules for operation in Canada.

CROR Changes and Additions-None

CROR Supplemental Instructions
General Bulletin Orders (GBO)—Apply on this subdivision.

Clearances, DOBs and GBOs Sent Electronically

Clearances issued electronically print only the items checked. The items checked will be listed on the bottom of the clearance. Notify the RTC if:

• The clearance does not contain all items listed on the bottom.

- Computer-generated line on the bottom listing items checked is missing.
 OR
- Clearance is missing text or is otherwise not legible.

DOBs sent electronically show the page number and total number of pages on each page. On every page except the last page, the lines of text are numbered, and a line showing the total number of lines of text on the page is included at the bottom. The last page contains the DOB Extension Authorization and Item Cancellation form, and a line at the bottom of the page showing the total number of DOB items and pages. Notify the RTC if:

- A line showing page number and total number of pages is missing or incorrect.
- A line of text is not numbered, or a line is numbered but contains no text.
- A line showing total number of lines of text is missing or incorrect.
- The line showing total number of items and pages is missing or incorrect.
 OR
- · DOB is missing text or is otherwise not legible.

GBOs sent electronically include the number of lines of text on the bottom of the GBO. The computer will count and list all lines that contain at least one character. Notify the RTC if:

- The GBO does not have the same number of lines shown on the bottom.
- The computer-generated line on the bottom listing the number of lines is missing.
- GBO is missing text or is otherwise not legible.

The RTC, when contacted, will arrange to provide crews with complete, legible copies and report incident to the Superintendent Operations.

Rule A—In addition to the requirements of General Rule A(ii) and (vii), employees specified below shall also have the following documents accessible while on duty:

Document	Train Crews, Yard Crews, Engine Crews	MoW Dept., Signal Dept.	RTC
General Orders & General Notices	Х	Х	Х
System Special Instructions	Х	Х	Х
BNSF Signal Aspects and Indications	Х	Х	Х
Hazardous Material Instructions	Х	Х	Х
Craft-Specific Safety Rules	Х	Х	Х
Air Brake & Train Handling Rules	Х	0	Х
2000 North American Emergency Response Guidebook	Х	Х	Х
Rules for the Protection of Track Units and Track Work	0	Х	Х
Train Dispatcher's, Operator's, and Control Operator's Manual	0	0	Х

When operating on CN property, employees must have the current CN Greater Vancouver Terminal Operating Manual and CN Pacific and Alberta Divisions Rule 83(c) Monthly Reissue of Operating Bulletins, and must ensure that there are no additional CN Operating Bulletins in effect that apply to their movement.

Exception: Employees of foreign railroads will be governed by the Air Brake and Train Handling Rules, Safety Rules and Hazardous Material Instructions of their employer. CN employees will use CN Foreign Railway Operating Bulletins in lieu of BNSF General Orders and General Notices.

Operating Rules Notes (ix)—In addition to the abbreviations included in this note, the following abbreviations are authorized and must be pronounced in full when transmitting and repeating by voice communication:

Controlled Block Signal CB	S North	N
Crossover XC	Northward.	NWD
Dual Control Switch DC	S Siding	SDG
East E	South	S
Eastward EV	VD Southward	SWD
Extra EX	Switch	SW
Head end restriction HE	R West	W
July JU	L Westward	WWD
June JU	N Work Extra	WK EX
Main Track M7	Γ Yard Limits.	YL
Mile Post MF	Yardmaster	YM

Rule 27—Not in effect on this subdivision. The following applies:

Except as shown in BNSF Signal Aspects and Indications, a fixed signal which is imperfectly displayed, or the absence of a fixed signal where one is usually displayed, must be regarded as the most restrictive indication that such signal is capable of displaying. An imperfectly displayed signal must be communicated to the proper authority as soon as possible. A signal which is known or suspected as being damaged must be regarded as an imperfectly displayed signal.

Rule 35—Rule 35.1 applies on this subdivision.

Rules 42 and 43—Signals will be two (2) miles, instead of 3000 yards, in advance of the working point or defect.

Rule 45.1—Signals will be placed to the right of the track as seen by the crew of an approaching train or engine unless otherwise specified by GBO.

Rule 81—Clearance not required between CTC Townsend and CN Jct.

Rule 83.1—BNSF New Westminster Subdivision Daily Operating Bulletin (DOB) applies on this subdivision. The DOB is issued by the BNSF RTC at New Westminster. Each DOB takes effect at 0001 and remains in effect until 0001 the following day. All train and engine movements operating on the New Westminster Subdivision, including territory governed by CROR Rule 105, must have the current DOB in their possession. The RTC may cancel a DOB item using the procedures applicable when extending a DOB. The DOB Extension Authorization and Item Cancellation form is part of the DOB, and must be transferred to the relieving crew when a crew is relieved short of its final terminal.

Rule 93.1—Applies at main track switch CN Jct.

Rule 104(b)—Main track switch CN Jct. may be left lined and locked in the reverse position.

Rule 132(b)—When communication is required to be in writing, directions (North, Northward, South, Southward, East, Eastward, West, Westward) must be pronounced, then spelled.

Rule 134—In addition to requirements of this rule, trains will be designated as "Extra," e.g. Extra 8142 North, Work Extra 2702, adding character when necessary, e.g. Psgr Extra VIA 6506 South.

Trains consisting entirely of Amtrak engines and passenger cars are authorized to operate at passenger train speeds specified in the timetable.

Rule 136—When copying a GBO, clearance, authority, or other instruction, the current date must be inserted on the

forms where space is provided. The date will not be transmitted by, nor repeated to, the RTC unless the date is of a previous day.

Rule 313—When items F and/or G on a clearance are checked, all movements must be made at restricted speed within the limits specified.

Rules 405 through 430—Not in effect on this subdivision. BNSF Signal Aspects and Indications are in effect.

Rule 568—The following are non-electrically locked hand operated switches:

MP 151.6—East Track, Industrial spur MP 145.1—West track, Pacbrew

MP 144.25—Main track, South end of yard lead New Westminster

MP 144.2—Main track, Labatt's Brewery

Rules for the Protection of Track Units and Track Work Changes and Additions—None

Rules for the Protection of Track Units and Track Work Supplemental Instructions—Rules 801(a), 803(e), 806, 819 through 822, 824(d), 849 through 875—not in effect on this subdivision.

5. Trackside Warning Detectors (TWD)

- Protecting bridges, tunnels or other structures MP 137.3, DED—NWD only, Recall Code 807
- Other TWD locations
 MP 134.8—Recall Code 808
 MP 137.3, DED—SWD only, Recall Code 807

A hot wheel defect should be treated the same as a hot bearing. Identify the defect, notify RTC and set out car.

6. FRA Excepted Track—None

7. Special Conditions

Close Clearance

May exist on all auxiliary tracks.

Restricted Clearances

High-voltage electric wires with less than standard clearance over rail at following locations:

Powell St.—Vancouver BI Line—21'6"

Renfrew St.-MP 153.7-22'6"

Retaining wall at MP 144.0 will not clear man on side of car or engine.

Ruling Grades—Use ABTH Rule 104.14 to comply with CROR Rule 112. The ruling grades for main tracks, sidings and yard tracks at specified locations are as follows:

White Rock—Level Sapperton Yard—0.7%
Colebrook—Level Lake City to Piper—0.6%
Townsend—0.2% Piper to Sperling—0.5%
Brownsville—0.2% Sperling to Willingdon Jct.—0.4%

Brownsville—0.2% Sperling to Willingdon Jct.—0.4%

New Westminster Willingdon Jct. to Still Creek—0.8%

(Old Yard)—0.6% Still Creek to CN Jct.—1.1%

Public Crossings at Grade—All Public Crossings, Bl Line, except in cases of emergency, all movements that are following another movement must not proceed closer than 1000 feet, to ensure proper operation of track circuits. Do not obstruct crossing until warning devices have been operating for at least 20 seconds.

Powell Street Crossing, BI Line, is equipped with warning devices consisting of roadway traffic signals and crossing bells. A white indicator light mounted on the signal housing indicates the operation of Powell Street roadway traffic stop signals. Do not obstruct the crossing until the white indicator light mounted on the signal housing is lit. If the indicator light

fails to operate continuously, the movement must stop short of Powell Street Crossing at a point where the leading trucks occupy the painted insulated joints adjacent to the crossing.

This will activate the white indicator light and roadway traffic signals. Do not obstruct the crossing until it is known that the warning devices have been operating for at least 20 seconds. If indicator light fails to operate, provide manual protection of the crossing per CROR Rule 103(g). Power failure will cause Powell Street traffic lights to be extinguished. A crossing circuit links the traffic light operation to the white indicator light. If the power supply is lost, the white indicator light no longer functions to indicate that traffic lights are aligned for the requested route. Crews will not receive the visual indication that traffic lights have stopped vehicular traffic, and must proceed over the crossing in accordance with CROR Rule 103(g).

Elevator Road Crossing, MP 138.9, must not be blocked by standing or switching train or engine Monday through Friday, between the hours of 0725 and 0745 or 1555 and 1615.

Whistling Ordinances

Vancouver and Burnaby—Transport Canada requires that within Vancouver and Burnaby, sounding of engine whistle, except to prevent accident, is prohibited at all highway crossings on the main track:

 Slocan St. MP 153.9
 Gilmore Ave. MP 152.3

 Kaslo St. MP 153.8
 Douglas Rd. MP 151.1

 Renfrew St. MP 153.7
 Piper Ave. MP 148.25

 Rupert St. MP 153.2
 Cariboo Rd. MP 147.2

 Boundary Rd. MP 152.8

Whistling is prohibited on all highway crossings on non-main

Parker St.—BI Line
Glen Drive—BI Line
Venables St.—BI Line
Union St.—BI Line
Powell St.—BI Line
Union St.—BI Line

Surrey and White Rock—All trains and engines must sound engine whistle in accordance with CROR Rule 14(I) during daylight hours when entering curves between MP 123.6 and MP 127.0.

All trains and engines must ring the engine bell continuously between MP 119.6 and MP 127.8 while in motion through these limits.

White Rock—Sounding the engine whistle, except to prevent an accident, is prohibited at all crossings through White Rock between 2000 and 0600 except CROR Rule 14(f) to be sounded approaching first crossing at MP 121.3 from the south and MP 122.7 from the north.

Flash Flood Warnings—Refer to Item 33, System Special Instructions. The following locations on this subdivision have been identified as "critical areas" and are limited to restricted speed:

MP 124.84 (Bridge 67.07) MP 125.11 (Bridge 68.08)

Automatic Equipment Identification Locations

CP Jct.—MP 145.3 Brownsville—MP 137.4

Federal Regulations

Employee Qualification—Employees whose duties involve the transportation of dangerous goods must carry a current BNSF Transportation of Dangerous Goods Certificate of Qualification while on duty and present it to a Transport Canada Officer upon request.

Illuminating Devices—Transport Canada requires that controlling locomotives be equipped with ditch lights.

Cabooseless Operation—Transport Canada requires that cabooseless trains be equipped with Generation II head of train and rear of train devices with remote intervention feature when operating in Canada.

If while enroute the HTD fails to display BRAKE PIPE PRESSURE and/or if the EMERGENCY BRAKING FEATURE becomes inoperative, trains are to be governed as follows:

- a. While train is stopped or in motion and the standard locomotive gauges and the air flow meter indicate correct train line pressure, the train may proceed at a speed not exceeding 25 MPH, until the equipment resumes normal operation, or to a point where the equipment can be exchanged enroute, or to the next regular crew change point where the HTD equipment can be repaired or changed out.
- b. While the train is stopped or in motion and the standard locomotive gauges and the air flow meter indicate a loss of air pressure, the train crew is required to perform an air brake test in accordance with ABTH Rule 100.15. After completion of this air brake test, the train may proceed at a speed not exceeding 25 MPH, until the equipment resumes normal operation, or to a point where the equipment can be exchanged enroute, or to the next regular crew change point where the HTD or ETD equipment can be repaired or changed out.

NOTE: If a train experiences a failure of the HTD, the standard locomotive gauges and the air flow meter indicate a loss of air pressure, and a successful ABTH Rule 100.15 cannot be performed, the train may proceed to the nearest location where such train can clear the main track, and then only with a sufficient number of car brakes operative, and at a speed not exceeding 15 MPH, until the HTD or ETD equipment is repaired, resumes normal operation, or ABTH Rule 100.15 air brake test is successfully completed.

Hazardous Material Within Census Metropolitan Area—New Westminster Subdivision MP 119.6 to MP 155.3 falls within the Vancouver Census Metropolitan Area.

Transport Canada requires that trains within a census metropolitan area while handling one or more loaded rail cars containing hazardous material:

- Must not exceed 35 MPH, and
- Must inspect train before entering, and at designated intervals while traveling within a census metropolitan area.

Northward trains handling one or more loaded rail cars containing hazardous material must be inspected before leaving Blaine, at Failed Equipment Detector MP 134.8 Townsend and at any other point where one or more loaded rail cars containing hazardous material are picked up.

Southward trains handling one or more loaded rail cars containing hazardous material must be inspected before leaving Vancouver, at Failed Equipment Detector MP 134.8 Townsend and at any other point where one or more loaded rail cars containing hazardous material are picked up.

A standing or pull-by inspection must be made by a qualified employee and may be limited to that portion of the train from the front of the train up to and including the second car beyond the last loaded rail car containing hazardous material.

Inspection by Failed Equipment Detector may be used in lieu of standing or pull-by inspection, except where detector message is "Integrity Failure," "System Failure" or "Train Too Slow," train must not exceed 15 MPH to a point where standing or pull-by inspection can be made.

USA Canada Border—Northward trains, engines, and track equipment must have permission from Canada Customs before any portion crosses the USA Canada Border. Conductor must furnish a copy of the wheel report to Canada Customs upon request, and accompany customs officers on a train inspection when asked to do so. Before departing the onduty location, conductor will complete and fax Canada Customs Rail Crew Report to Swift, and will contact BNSF RTC New Westminster to have Daily Operating Bulletin(s) faxed to the on-duty location. When ready to depart Swift, crew will contact the BNSF RTC New Westminster on the radio to obtain a clearance.

Exception: Amtrak passenger trains will obtain a clearance from the BNSF RTC New Westminster by fax at Bellingham. If unable to obtain a clearance in this manner, contact the BNSF RTC New Westminster by radio before leaving Swift.

Southward trains, engines, and track equipment arriving White Rock must have permission from US Customs before any portion crosses the USA Canada Border. Southward trains will call Swift and obtain permission to proceed from USA Canada Border to Swift for inspection.

Colebrook—Roberts Bank Line—Roberts Bank is a designated 1000-mile train inspection location. All trains, except trains inspected at Interbay, are to be tested and inspected by the train crew before departing Roberts Bank in accordance with the provisions of ABTH Rule 100.10.

Any car that is found to be defective and is safe to move is to be taken to Colebrook and set out for repair by the BNSF Mechanical Department. Any car that cannot be safely moved is to be set out on the industrial stub track at Roberts Bank as directed by BC Rail Operations Supervisor.

Trains using Roberts Bank Line must have current Roberts Bank Route joint DOB. BC Rail Port Subdivision monthly bulletin is posted at Swift. Crews operating to or from Roberts Bank will be governed thereby while on BCR trackage.

CROR Block and Interlocking Signals, Rules 405 through 430, apply on BCR trackage.

Fraser River Jct.—Trainman's walkway and handrail on Fraser River Bridge swing span have been removed.

Identifying Signals—In signaled territory, when a train is passing a signal displaying other than "Clear" in advance of a control point, a crew member must transmit the following by radio:

Train Identification (Initials, Engine Number and Direction) Signal Name - In advance of (Control Point Location), on (Track) at (Speed) MPH.

Example of transmission:

"BNSF 6301 South approach medium in advance of Napavine South on Main 1 at 50 MPH (on single track main track designation is not necessary).

8. Line Segments

Yard Line Segments

Line Segment Yard 600 Vancouver BC

000	 variou	Juvei,	ВС					
601	 Sappe	erton	Yard-	-Brunett	e Ave.	to N	lorth F	₹d.
602	 New	Westr	ninste	r—Brun	ette A	ve. t	o Fras	ser
	River	Brido	ie					


Road Line Segments Linie Segment Limits 417 Tilbury Line Jct.—Tilbury Island Dock—MP 0.0 to MP 4.1 432 Colebrook—Roberts Bank (BCR)—MP 7.8 to MP 23.3

56 CN Jct. to USA Canada Border—MP 155.3 to MP 119.6

9. Locations Not Shown as Stations

Name		Miles - Location	Capacity Cars	Switch Opens
15129	Vancouver	0.4 north of CN Jct.	Yard	Both
15106	Tilbury Line Jct.	0.4 north of Townsend	Conn	North
66504	Tilbury Island Dock (on Spur)	4.1 from Tilbury Line Jct.	Yard	Both
66565	Roberts Bank (on BCR)	15.5 from Colebrook	Yard	Both

10. Grade Chart

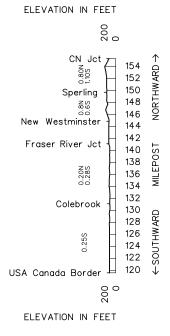

Freight

SOUTHWARD	Length of Siding (Feet)	Station Nos.	Mile Post	Oregon Trunk Subdivision MAIN LINE STATIONS	Rule 4.3	Type of Oper.	Line Segment	Miles to Next Stn.	↑NORTHW AR
*	(* 55.)		0.2	FALLBRIDGE	JT			0.2	Ď
			0.4	MILEPOST 0.4				0.6	
		14002	1.0	O T JCT	AJ			4.4	
	4,399	14006	5.4	MOODY				12.4	
	5,449	14018	17.8	LOCKIT				8.1	
	2,554	14026	25.9	DIKE				4.0	
	2,539	14030	29.9	SINAMOX				9.3	
	6,292	14040	39.2	OAKBROOK				15.0	
	1,280	14055	54.2	MAUPIN				0.8	
	4,526	14056	55.1	CAMBRAI		ABS		8.2	
	2,557	14064	63.3	NENA		TWC	53	7.3	
	5,533	14071	70.6	DIXON				9.0	
	5,294	14080	79.6	KASKELA				5.7	
	5,386	14086	85.3	SOUTH JCT				8.2	
	1,746	14094	93.5	GATEWAY				5.8	
	5,579	14100	99.3	PAXTON				5.4	
	2,474	14105	104.7	MADRAS				5.0	
	4,885	14110	109.7	ROUND BUTTE				4.8	
	2,677	14115	114.5	CULVER				6.6	
	5,570	14122	121.1	OPAL CITY				7.9	
	2,548	14130	129.0	TERREBONNE				2.8	
	4,202	14132	131.8	PRINEVILLE JCT	J			2.3	
	5,122	14135	134.1	REDMOND				9.2	
	6,336	14144	143.3	DESCHUTES				8.7	
	5,300	14152	152.0 0.0Z	BEND	ВТ			2.0	
	5,200	14154	2.0Z	CASCAN				10.6	
	8,725	14165	12.6Z	LAVA		TWC	54	19.0	
	7,836	14184	31.6Z	BEAL			54	19.1	
	7,816	14203	50.7Z	ROSEDALE				17.1	
	8,339	14220	67.8Z	CHEMULT	J			219.5	

Between Chemult and Bieber Line Jct., UP rules and timetable govern.

Radio Channel No. 66 in service.

Between Crescent Lake and Klamath Falls - On UP, Cascade Subdivision, Radio Channel is 45-45.

Radio Call-In					
Wishram-89(X)	Sinamox-74(X)	Oakbrook - 75(X) MP 30 - MP 45			
Maupin-10(X)	Dixon - 76(X) MP 63 - MP 75	South Jct19(X)			
Madras-12(X)	Redmond-13(X)	Bend - 14(X)			
Lava - 43(X)	MP 37.5 - 15(X)	Chemult-31(X)			
Klamath Falls-16(X)					
Emergency - Call 911					
Dispr X=0, Mechanica	al X=2, Field Support X=	=3, Warm Bearing X=5			

Train Dispatcher Telephone Numbers

8-234-6454, Mon-Fri 0430-2030

8-234-1605, Mon-Fri 2030-0430, Sat-Sun 24 Hrs.

1. Speed Regulations

1(A). Speed-Maximum

	ricigiii
MP 0.2 to MP 109.7	35 MPH.
MP 109.7 to MP 152.0	50 MPH.
MP 0.0Z to MP 67.8Z	49 MPH.

1(B). Speed—Permanent Restrictions

MP 0.2 to MP 1.1	10	MPH.
MP 23.4 to MP 24.3	10	MPH.
MP 24.3 to MP 43.6	30	MPH.
MP 43.6 to MP 44.6	25	MPH.
MP 49.1 to MP 49.3	30	MPH.
MP 61.3 to MP 62.5	10	MPH.
MP 62.5 to MP 67.6	30	MPH.
MP 67.6 to MP 68.0		
MP 75.3 to MP 79.1	25	MPH.
MP 87.3 to MP 98.1	22	MPH.
MP 109.1 to MP 109.3		
MP 114.3 to MP 114.4 (HER)	35	MPH.
MP 134.4 to MP 134.9 (HER)	35	MPH.
MP 149.8 to MP 150.5	40	MPH.
MP 150.5 to MP 151.7	25	MPH.
MP 151.7 to MP 3.2Z	40	MPH.

1(C). Speed—Switches and Turnouts—None

1(D). Speed-Other

Item 1A of System Special Instructions APPLIES AND, is modified as follows:

Between Bend and Chemult, to control harmonic rocking, ALL trains which cannot maintain a minimum speed of 21 MPH, must immediately reduce speed to 13 MPH or less until movement can again exceed 21 MPH

Hot Weather Speed Restrictions—When the ambient (air) temperature is in one of the following ranges, the applicable restrictions will apply:

Temperature	Freight Trains	Freight Trains
Range	Up to 100 TOB	100 TOB & Over
90 degrees & over	Maximum 40 MPH.	

EXCEPTION: The following locations have been identified as critical zones:

MP 0.2 - MP 109.7

Through the limits of these critical zones, when the ambient (air) temperature is in one of the following ranges, the applicable further restriction will apply:

Temperature	Freight Trains	Freight Trains
Range	Up to 100 TOB	100 TOB & Over
100 degrees & over	Maximum 25 MPH.	

Cold Weather Speed Restrictions - When temperatures are below -10 degrees Fahrenheit, the applicable restrictions will apply:

- 40 MPH for trains exceeding 100 tons per operative brake
- 50 MPH for trains less than 100 tons per operative brake
- 65 MPH for passenger trains, Z-symbol intermodal trains, or single level loaded intermodal trains.

See Item 1 of the System Special Instructions for additional speed restrictions.

2. Bridge and Equipment Weight Restrictions Maximum Gross Weight of Car

Fallbridge to Chemult 143 tons, Restriction B

Six-axle locomotives and six-axle derricks:

Madras—not permitted West of the Lumber Lead Bridge.

Redmond—permitted only on the pass, new storage and
Ferrell Gas Tracks.

Bend-not permitted on Haines, Drill and Mill spurs.

3. Type of Operation

ABS—in effect: MP 0.2 to MP 149.8

TWC—in effect:

MP 0.2 to MP 67.8Z

Interlockings and Drawbridges not Indicated at Station—Columbia River Drawbridge MP 0.6 is controlled by automatic interlocking.

Northward trains must contact the bridge tender on Bridge 1 at Pasco to determine if river traffic is clear before passing the first northward absolute signal (UPRR signal mast) at OT Junction. After stopping short of the first northward absolute signal at OT Junction, be governed by instructions posted in box or the telephone booth located at MP 1.8. At OT Junction, a duplicate yellow light has been installed on the east side of the signal case for movement through the automatic interlocking per the posted instructions.

Southward trains must not enter the draw span 75 foot approach circuit until advised by the Bridgetender on Bridge 1 at Pasco that river traffic is clear. If unable to contact the Bridgetender, be governed by the instructions posted both on the control box and in telephone booth at MP 0.4.

Bridge must not be lowered by maintenance personnel or the 75 ft. approach circuit occupied until advised by the Bridgetender on Bridge 1 at Pasco that river traffic is clear. After advised by the Bridgetender, or if unable to make contact via radio, be governed by instructions posted on Maintenance of Way control boxes located on each end of the drawspan.

Trains from Union Pacific Railroad must not enter release section at O.T. Junction if restricted by opposing train movement until movement clears O.T. Junction. Northward Union Pacific trains must report to the Oregon Branch Dispatcher when clear of the "Overlap" sign on Union Pacific Railroad after leaving the Oregon Trunk Subdivision.

The Bridgetender on Bridge 1 at Pasco may be contacted on the Oregon Branch Dispatcher's radio, Channel 66.

4. General Code of Operating Rules Items

Rule 6.10—In addition to the requirements of General Code of Operating Rule 6.10 and to Signal Switch Awareness Form, the Conductor must do the following:

- After passing the last station, but at least 2 miles from the limits of authority granted by a Track Warrant, the Conductor must review Track Warrant(s) that his/her train is operating under with the Engineer and the Engineer must verbally acknowledge understanding of all items on the Track Warrant(s). After receiving verbal acknowledgment from the Engineer, the Conductor will enter time, date, and his/her initials on the Track Warrant(s).
- Before departing from a siding or when holding the main track at a station before departing that station, the Conductor must review Track Warrant(s) that his/her train will be operating under with the Engineer and the Engineer must verbally acknowledge understanding of all items listed on the Track

Warrant(s). After receiving verbal acknowledgment from the Engineer, the Conductor will enter time, date, and his/her initials on the Track Warrant(s).

Upon completion of tour of duty, arrange to submit all Track Warrants and Signal/Switch Awareness Forms to proper authority.

Rule 6.19—When flagging is required, distance will be 1.0 mile between Wishram and Round Butte and 2.0 miles between Round Butte and Chemult.

Rule 6.28—Rule 6.28 is in effect on the East Leg of the Wye at Fallbridge, between the Fallbridge Subdivision and MP 0.4.

Rule 15.1—OT Jct.—Southward Union Pacific trains will receive track warrant at the Dalles.

5. Trackside Warning Detectors (TWD)

- A. Protecting bridges, tunnels or other structures: None
- B. Other TWD locations

MP 21.8—Recall Code 748

MP 50.4—Recall Code 108

MP 74.8—Recall Code 198

MP 85.0—DED/Exception Reporting

MP 90.0—DED/Exception Reporting

MD 05 0 DED/Exception Reporting

MP 95.0—DED/Exception Reporting

MP 100.0—DED/Exception Reporting

MP 107.2—Recall Code 128

MP 137.0-Recall Code 138

MP 26.0Z—Recall Code 148

MP 59.3Z-Recall Code 257

6. FRA Excepted Track—None

7. Special Conditions

Between OT Jct. AND Chemult—Loaded garbage trains, loaded unit grain trains, loaded beet trains or freight trains handling one or more loaded grain pools will hold the main line when meeting, passing, or being passed by other trains, except when authorized by train dispatcher.

Between OT Jct. and South Jct. - When required to set out cars, do not block access to setoffs.

OT JCT.—In order to eliminate potential delay to marine traffic, Northward trains destined the Fallbridge Subdivision must contact the Pasco West Dispatcher prior to entering the automatic interlocking to determine if they will be delayed entering the Fallbridge Subdivision.

MP 1.8—When school is in session, to allow school bus access, do not block the Celilo Village crossing between the hours of 0635 and 0650 and 1550 and 1605, Monday though Friday.

Moody—Siding must not be blocked between North Switch and Industry track.

South Jct. to Madras—The following tonnage limits are in effect for southward trains:

Manifest/Intermodal Trains:

Without distributed power/helpers—7,000 tons With helpers/distributed power on rear—9,500 tons With helpers/distributed power cut in—12,000 tons

Loaded Unit bulk Commodity Trains, same as above, except:

With helpers/distributed power cut in—15,000 tons Note: Helpers may also be cut in if tonnage is less than 9,500 tons.

Cascan—When parking their train northward trains must pull all the way to the fluorescent red line at the north end of the yard, or further, to ensure that the lead and switches are not fouled.

Train Inspections—A member of the inbound crew on through trains operating cabooseless will give the outbound train a roll-by inspection and advise the outbound crew the condition of the train, unless the outbound crew will not be immediately available or the inbound crew is otherwise relieved of duties.

Hazardous Material—The Oregon Vehicle Code 824.084 requires a visual external inspections of all cars standing in rail yards or stations more than two hours. Each rail car containing hazardous material and bearing an "Explosive A", "Flammable Gas" or "Poison Gas" placard as required by federal regulation, and which remains in a rail yard or station for more than two hours, shall be visually inspected externally by the transporting railroad within two hours of the car's arrival and within two hours of the car's departure. If no carman is on duty to perform the required OVC 824.084 inspections, the inspections shall be made by a member of the train or switch crew at each yard or station where the affected rail car terminated or originated. The person making the inspection shall ascertain whether there is any evidence or signs of leakage or other loss or change of contents from any affected rail cars and whether there are any obvious defects in the running gear of any affected rail cars. The dispatcher shall be immediately notified of all problems observed which are not promptly corrected.

Flash Flood Warnings— Refer to Item 33, System Special Instructions. The following location on this subdivision have been identified as "critical areas": MP 6 to MP 85

RoadRailer Equipment—Train total trailing tonnage must not exceed 3000 tons.

Additional Restrictions Train Tonnage:

0-1500 Tons-No Restrictions

Over 1500 Tons—No more than 1500 trailing tons behind any RoadRailer unit weighing 28 tons or less.

Note: A RoadRailer unit is defined as one trailer and its accompanying coupler mate or intermediate bogie.

Bad Order Setout Locations—The following locations have been designated bad order setout locations because of their accessibility to Mechanical Department repair vehicles:

Moody	Madras	Deschutes
Sherar	Round Butte	Bend
Maupin	Culver	Cascan
Kaskela	Opal City	Lava
South Jct.	Terrebonne	Beal
Gateway	Prineville Jct.	Rosedale
Paxton	Redmond	Chemult

Close Clearance—May exist on all auxiliary tracks. The following switching procedures will apply on tracks identified to have track centers of 13 feet or less:

When working around areas that have been identified having close clearance conditions, before fouling those areas all movements are to be stopped and all crew members accounted for before completing the switching move. Riding the side of cars is prohibited unless the adjacent track is known to be clear. It is the responsibility of each crew member to review close clearance locations within their area of work prior to the start of the work process.

The Following tracks have been identified to have track centers of 13 feet or less:

At Wishram:

Between tracks 6502 and 6503 Between tracks 6503 and 6504

At Bend:

Between tracks 8041 and 8042

Identifying Signals—In signaled territory, when a train is passing a signal displaying other than "Clear" in advance of a control point, a crew member must transmit the following by radio:

Train Identification (Initials, Engine Number and Direction) Signal Name - In advance of (Control Point Location), on (Track) at (Speed) MPH.

Example of transmission:

"BNSF 6301 South approach medium in advance of Napavine South on Main 1 at 50 MPH (on single track main track designation is not necessary).

Test Mile Locations

SWD: MP 7.0 to MP 8.0 MP 6.0Z to MP 7.0Z. NWD: MP 63.0Z to MP 62.0Z.

8. Line Segments

Road Line Segments

Line Segment Limits

53 Fallbridge to Bend 54 Bend to Chemult 455 MP 0.0 to MP 0.21

Yard Line Segments


Line Segment Limits


637 Bend O.T. 638 Cascan

9. Locations Not Shown as Stations

	Name	Miles - Location	Capacity Cars	Switch Opens
14047	Sherar	7.3 north of Maupin-MP 46.9	11	North
14051	Tuscan	3.8 north of Maupin-MP 50.4	10	North
14068	Dant	3.7 south of Nena-MP 67.0	3	North
14225	Diamond Lake (SPT)	5.3 south of Chemult-MP 498.0	112	Both
14231	Yamsay (UP)	10.7 south of Chemult-MP 492.6	111	Both
14240	Lenz (UP)	19.9 south of Chemult-MP 483.4	112	Both
14249	Fuego (UP)	28.8 south of Chemult-MP 474.5	112	Both
14258	Calimus (UP)	38.0 south of Chemult-MP 465.3	130	Both
14266	Chiloquin (UP)	46.6 south of Chemult-MP 456.7	113	Both
14271	Lobert (UP)	50.6 south of Chemult-MP 451.8	130	North
14276	Modoc Point (UP)	56.1 south of Chemult-MP 447.2	111	Both
14284	Aigoma (UP)	64.4 south of Chemult-MP 438.9	111	Both
14289	Wocus (UP)	69.2 south of Chemult-MP 434.1	111	Both
14291	Chelsea (UP)	71.4 south of Chemult-MP 431.9	113	Both
14293	Kiamath Fails Depot (UP)	73.8 south of Chemult-MP 429.5	Yard	Both

10. Grade Chart

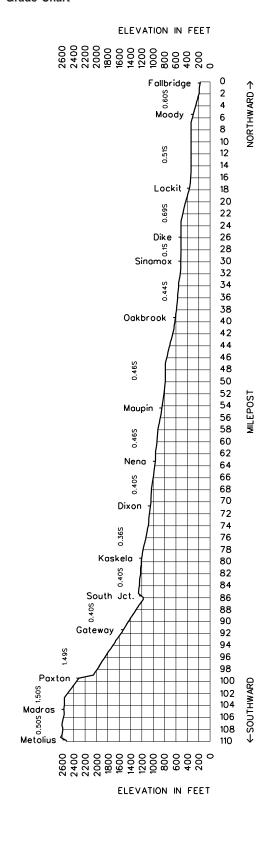

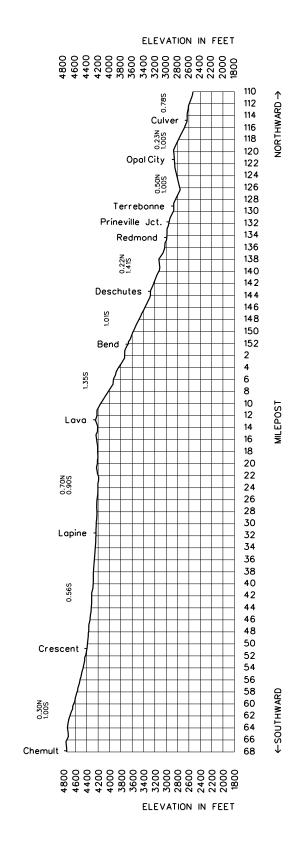

147									
WESTWARD.	Length of Siding (Feet)	Station Nos.	Mile Post	Scenic Subdivision MAIN LINE STATIONS	Rule 4.3	Type of Oper.	Line Segment	Miles to Next Stn.	V
	, ,	02044	1650.2	WENATCHEE	BY	2MT		2.7	1
			1652.9	OLDS JCT.	JY	ABS 2MT/CTC		8.3	1
	8,049	02056	1661.2	CASHMERE				11.0	1
	7,905	02067	1672.2	LEAVENWORTH				14.7	1
	10,978	02081	1686.9	WINTON				5.5	1
	6,729	02087	1692.4	MERRITT	Т			6.1	1
	12,323	02094	1698.5	BERNE				11.0	1
	9,259	02103	1709.5 1720.5	SCENIC			37	11.8	1
	8,949	02116	1732.3	SKYKOMISH	Т		3/	7.2	
	10,099	02124	1739.5	BARING		СТС		16.2	1
	10,244	02139	1755.7	GOLD BAR				12.9	1
	11,988	02152	1768.6	MONROE				6.6]
		02159	1775.2	SNOHOMISH JCT. EAST	JT			1.0	
		02159	1776.2	SNOHOMISH JCT. WEST	JT			5.0	
	7,140	02163	1781.2	LOWELL	J			1.3	
		02165	1782.5	PA JCT.	JX			0.2]
		02166	1782.7	EVERETT	В			0.2	1
			1782.9	BROADWAY				1.8	1
		02169	1784.7 32.2	EVERETT JCT.	JX			0.8	
			31.4	HOWARTH PARK		2MT		2.9	
		02172	28.5	MUKILTEO		СТС		0.7	
			27.8	MP 28		СТС		0.8	
			27.1	MP 27		2MT		9.3	
			17.8	MP 18		CTC		0.3	
		02182	17.6	EDMONDS		СТС		1.7	
			15.9	MP 16		2MT	50	8.2	
			7.7	MP 8	Υ	ABS		0.3	
			7.4	MP 7	MY	OCS		0.9	
		02193	6.5	BALLARD	Υ	2MT		0.2	
			6.3	BRIDGE 6.3	MY	ABS		0.9	
			5.4	MP 5.4	MY			0.5	
		02195	4.9	INTERBAY (Balmer Yard)	BMTY	ABS OCS		1.5	
			3.4	GALER STREET	MX(2)Y	2MT/ABS OCS		1.8	
			1.6	NORTH PORTAL	X(2)Y	us		1.5	
			0.1	SOUTH PORTAL	Х	2MT CTC		0.1	
		02200	0.0	SEATTLE (King St. Station)	В			155.7	

Radio Channel No. 66 in service Wenatchee to MP 8.0.

Radio Channel No. 70 in service MP 8.0 to Seattle.

Bayside Yard at Everett is assigned Channel 14. All Bayside Switch Jobs and Yardmasters will operate on this channel. Yardmaster will monitor Channel 66 and North Branch Channel 76. Delta Yard will operate on Channel 60.

Radio Call-In					
Wenatchee - 28(X)	Cashmere - 29(X)	Merritt - 30(X)			
Cascade Tunnel - 57(X)	Skykomish - 31(X)	Index - 39(X)			
Monroe - 32(X)	Everett - 34(X)	Mukilteo - 35(X)			
Richmond Beach - 36(X) Emergency - Call 911					
Dispr X=0, Mechanical X=2, Field Support X=3, Warm Bearing X=5					

Train Dispatcher Telephone Numbers

Seattle East—8-234-1615 Seattle Terminal Dispatcher 8-234-1613 Bridge 6.3 Ballard—8-784-2976

1. Speed Regulations

1(A). Speed—Maximum

	Passenger	Freight
MP 1650.2 to MP 1783.9	79 MPH	50 MPH.
MP 1783.9 to MP 0.0	60 MPH	50 MPH.
Amtrak Talgo Trains	79 MPH.	

1(B). Speed—Permanent Restrictions

,-	-	
	MP 1650.2 to MP 1652.9 Main 1	25 MPH 25 MPH.
	MP 1650.2 to MP 1651.1 Main 2	35 MPH 35 MPH.
	MP 1651.1 to MP 1652.9 Main 2	
	MP 1652.9 to MP 1658.7	
	MP 1658.7 to MP 1661.7	40 MPH 40 MPH.
	MP 1661.7 to MP 1669.2	40 MPH 35 MPH.
	MP 1669.2 to MP 1680.1	55 MPH 45 MPH.
	MP 1680.1 to MP 1680.6	25 MPH 25 MPH.
	MP 1680.6 to MP 1682.7	55 MPH 45 MPH.
	MP 1682.7 to MP 1693.2	50 MPH 45 MPH.
	MP 1693.2 to MP 1721.2	30 MPH 25 MPH.
	MP 1721.2 to MP 1730.0	25 MPH 20 MPH.
	MP 1730.0 to MP 1732.6	30 MPH 25 MPH.
	MP 1732.6 to MP 1734.7	45 MPH 40 MPH.
	MP 1734.7 to MP 1737.4	45 MPH 45 MPH.
	MP 1737.4 to MP 1740.6	50 MPH 45 MPH.
	MP 1740.6 to MP 1749.0	40 MPH 40 MPH.
	MP 1749.0 to MP 1751.5	50 MPH 45 MPH.
	MP 1751.5 to MP 1756.7	70 MPH 50 MPH.
	MP 1756.7 to MP 1757.6	50 MPH 50 MPH.
	MP 1757.6 to MP 1760.5	65 MPH 50 MPH.
	MP 1760.5 to MP 1763.0	50 MPH 50 MPH.
	MP 1763.0 to MP 1768.4	50 MPH 45 MPH.
	MP 1768.4 to MP 1770.7	45 MPH 45 MPH.
	MP 1770.7 to MP 1774.8	
	MP 1774.8 to MP 1775.4	
	MP 1775.4 to MP 1775.6	
	MP 1775.6 to MP 1778.8	
	MP 1778.8 to MP 1780.7	
	MP 1780.7 to MP 1782.9	
	MP 1782.9 to MP 1783.1	
	MP 1783.1 to MP 32.0	
	MP 32.0 to MP 28.1	
	MP 28.1 to MP 26.9	
	MP 26.9 to MP 25.9	
	MP 25.9 to MP 25.4	
	MP 25.4 to MP 20.0	
	MP 20.0 to MP 17.0	
	MP 17.0 to MP 16.6	
	MP 16.6 to MP 12.6	
	MP 12.6 to MP 11.5	
	MP 11.5 to MP 8.8	
	MP 8.8 to MP 8.0	
	MP 8.0 to MP 6.6	
	MP 6.6 to MP 6.4	
	MP 6.4 to MP 6.1 MP 6.1 to MP 5.9	
	MP 5.9 to MP 3.4	
	MP 3.4 to MP 1.9	
	MP 1.9 to MP 0.0	
	Australi-Talma Marrimonia Ou saula	3

Amtrak Talgo Maximum Speeds	Passenger
MP 1782.4 to MP 1782.9	40 MPH.
MP 1782.9 to MP 32.0	33 MPH.
MP 32.0 to MP 29.2	63 MPH.
MP 29.2 to MP 28.1	55 MPH.
MP 28.1 to MP 26.9	45 MPH.
MP 26.9 to MP 25.8	63 MPH.
MP 25.8 to MP 22.0	55 MPH
MP 22.0 to MP 20.0	50 MPH.
MP 20.0 to MP 17.0	60 MPH.
MP 17.0 to MP 16.7	50 MPH.
MP 16.7 to MP 13.2	55 MPH.
MP 13.2 to MP 11.5	60 MPH.
MP 11.5 to MP 8.8	55 MPH.
MP 8 8 to MP 6 6	50 MPH

44 NORTHWEST DIVISION—No. 3—April 26, 2006—Scenic Subdivision

Amtrak Talgo Maximum Speeds	Passenger
MP 6.6 to MP 6.4	30 MPH.
MP 6.4 to MP 6.1	20 MPH.
MP 6.1 to MP 5.9	30 MPH.
MP 5.9 to MP 3.4	45 MPH.
MP 3.4 to MP 1.9	60 MPH.
MP 1.9 to MP 0.0	30 MPH.

1(C). Speed—Switches and Turnouts

· .	Passenger	Freight
Through dual control turnouts at the following loc	ations:	
Olds Jct.	25 MPH	25 MPH.
Cashmere, Leavenworth, Winton,		
Merritt, Berne	30 MPH	25 MPH.
Scenic, Skykomish, Baring, Gold Bar,		
Monroe	20 MPH	20 MPH.
Snohomish Jct. West	12 MPH	12 MPH.
Lowell Jct	10 MPH	10 MPH.
PA Jct	30 MPH	25 MPH.
Broadway	25 MPH	25 MPH.
Everett Jct.	25 MPH	25 MPH.
Howarth Park	35 MPH	35 MPH.
Mukilteo	30 MPH	30 MPH.
MP 28, MP 27, MP 18, MP 16, MP 8, MP 7,		
MP 5.4, 23rd Ave., Galer St	35 MPH	35 MPH.
South Portal	30 MPH	20 MPH.
Trains over 100 TOB must not exceed 25 MPH th	rough turnouts	shown to

Trains over 100 TOB must not exceed 25 MPH through turnouts shown to exceed that speed.

1(D). Speed-Other

Speed—Other	
Trains 143 TOB and greater on descending gra	ides:
MP 1700.0 to MP 1731.0, WWD	15 MPH.
MP 1700.0 to MP 1693.0, EWD	15 MPH.
Cascade Tunnel—Eastward Freight Trains	
passing signal 1700.6 with other than clear	aspect
under 100 TOB	20 MPH.
over 100 TOB	15 MPH.
Everett—Commuter station spur	20 MPH 20 MPH.
Everett Pier to Mukilteo, while handling	
24-foot hi-wide Boeing Container cars	Restricted Speed.
Mukilteo MP 29.0 to MP 27.0 (HER)	30 MPH.
Trains entering or leaving Oroville Branch at	
Olds Jct. control point	20 MPH.
Ballard Low Line	5 MPH 5 MPH.
Ballard—Over Bridge 6.3	20 MPH 20 MPH.
Seattle—Over public crossings	20 MPH 20 MPH.

Temperature Restrictions

When ambient temperatures between Wenatchee and the East Portal, Cascade Tunnel at Berne exceeds 90 degrees Fahrenheit, the maximum speed for trains is 60 MPH passenger and 50 freight. In addition, trains exceeding 100 TOB must not exceed 35 MPH.

When ambient temperatures between the West Portal, Cascade Tunnel at Scenic and Seattle exceeds 85 degrees Fahrenheit, the maximum speed for trains is 60 MPH passenger and 50 MPH freight. In addition, trains exceeding 100 TOB must not exceed 35 MPH.

See Item 1 of the System Special Instructions for additional speed restrictions.

2. Bridge and Equipment Weight Restrictions Maximum Gross Weight of Car

Wenatchee to Seattle143 tons, Restriction B

Six-axle locomotives and six-axle derricks not permitted and not more than two (2) four-axle locomotives on Standard Oil spur, located 2.6 miles west of Edmonds.

Six-axle locomotives and six-axle derricks not permitted on the Dyke Team Track.

3. Type of Operation

CTC—in effect: MP 1652.8 to MP 7.7 MP 1.4 to MP 0.0

ABS—in effect: MP 1650.2 to MP 1652.8 MP 7.7 to MP 1.4

Two Main Tracks—

MP 1650.2 to MP 1652.9 MP 32.2 to MP 27.8 MP 27.1 to MP 17.8 MP 15.9 to MP 7.7 MP 7.4 to MP 5.4 MP 3.4 to MP 0.0

Occupancy Control System—in effect:

MP 7.7 to MP 1.4

Yard Limits—in effect:

MP 1650.2 to MP 1652.8

Trains and engines must obtain permission from the Wenatchee Yardmaster or other designated employee before entering these limits.

MP 7.7 to MP 1.4

Trains and engines may occupy the main track on signal indication of a controlled signal or verbal OCS permission.

Manual Interlockings Not Using Track and Time (Rule 10.3) to Protect MW Employees—MP 8, MP 7, Bridge 6.3, MP 5.4, 23rd Ave, MP 4.0, and Galer Street—Maintenance of Way employees may occupy interlockings on OCS authority from the train dispatcher.

- A. The Movement of Hyrail and On-track Equipment
 Drawbridge 6.3—Maintenance of way employees may
 occupy interlocking on OCS authority from train
 dispatcher but must obtain verbal permission from
 bridge tender. Bridge Tender must provide protection
 for movement until Maintenance of Way employee has
 reported clear of the limits of the bridge interlocking.
- B. Entering the Limits of Ballard Bridge, for inspection or minor work—Maintenance of way employees may occupy interlocking on OCS authority from train dispatcher but must obtain verbal permission from bridge tender. Bridge Tender must provide protection for Maintenance of Way employee until employee has reported clear of the limits of the bridge interlocking.
- C. All other work within the Limits of Ballard Bridge Interlocking—OCS must be obtained from the dispatcher and protection provided by the bridge tender.
- D. Entering the Limits of the Ballard Bridge Interlocking to get to the Bridge Tender's Hut or for Shift change—Bridge Tender must be contacted to request verbal permission prior to entering the limits of the Ballard Bridge interlocking. Bridge Tender will assure protection to allow entrance to the limits of the interlocking and passage to the Bridge Tender Hut. Blocking the control panel for main 1 and main 2 will provide protection.
- E. Ballard Bridge Log Book for recording Protection provided by the Bridge Tender—The Bridge Tender when providing protection on the Bridge must record in writing and do the following:
 - 1. Name of person requesting protection.
 - 2. Date and time of request.
 - 3. What protection is being provided, i.e. bridge, locking, main 1 blocking, main 2 blocking or a combination of the three
 - 4. If OCS is required, ascertain if the person requesting the protection has an OCS permit.
 - 5. Place the appropriate key(s) in the logbook.
 - 6. Initial protection provided.
 - 7. Give requesting party verbal verification of protection.
 - 8. Date and time of reporting clear. The person requesting protection of the Bridge Tender must not consider protection in place until the bridge tender has given verbal permission to enter the limits of the Ballard Bridge Interlocking.

Interlockings Not Indicated at Station—MP 4.0—Manual interlocking.

MP 5.4—Manual Interlocking 23rd Avenue—Manual Interlocking

4. General Code of Operating Rules Items

Rule 1.47—For Seattle Sounder operations only, when a signal requires the train to stop at or pass the next signal at restricted speed, the engineer must communicate this fact, including the track designation if on multiple tracks, to a designated member of the crew and get an acknowledgment. If no acknowledgment is received, the engineer must ascertain at the next scheduled stop why the message is not being confirmed. If the engineer fails to control the train movement in accordance with either a wayside signal or other restrictions imposed upon the train, the designated crew member shall at once communicate with and caution the engineer regarding the restriction, and if necessary, take appropriate action to ensure the safety of the train, including stopping all movement if appropriate.

Rule 5.8.1/Rule 5.8.2—Seattle, King Street Station—When initiating movement, passing or approaching platform: Engine or cab bell must be rung. Do not sound whistle signals unless emergency or to warn employees.

Rule 5.8.2—Due to quiet zone designation between MP 1650.4 and MP 1652.4 and between MP 2.0 and MP 1.0, requirement to use whistle signal 7 is no longer in effect. All other whistle requirements remain in effect.

Rule 5.10—All commuter locomotives must have red markers displayed when locomotive is in trailing position.

Rule 6.19—When flagging is required, distance will be 2.5 miles.

MWOR Rule 8.12—Crossover Switches, the following paragraph is added on the Scenic Subdivision:

At signaled locations identified in the timetable/general orders as having individually controlled crossover switches (ICS), MW employees may ask the control operator for permission to operate one end of the crossover for maintenance or testing purposes only. Trains, engines, and on-track equipment must not be used or allowed within the defined working limits of the individual switch involved during such operations. The individually controlled crossover switch must be left lined and secured in the normal position prior to reporting clear of the working limits.

MWOR Rule 8.14—Conflicting Movements Approaching Switch, the 2nd paragraph is changed to read: Crossover Switches, other than individually controlled crossover switches with control operator's permission, must not be unlocked or lined for crossover movement when another movement is approaching or passing over either switch.

Rule 9.1.8—For passenger operations only, the "Approach" signal indication is changed to read: Proceed prepared to stop at the next signal, trains exceeding 40 MPH immediately reduce to that speed.

Rule 9.1.12—For passenger operations only, the "Diverging Approach" signal indication is changed to read: Proceed on diverging route not exceeding prescribed speed through turnout; approach next signal preparing to stop, if exceeding 40 MPH immediately reduce to that speed.

Rule 9.9—For Seattle Sounder operations only, in CTC when any train stops or its speed is reduced below 10 mph, the train must proceed at a speed not exceeding 40 mph, prepared to stop at the next signal until the next signal is visible and that signal displays a proceed indication.

Rule 10.2—The Cascade Lumber switch, 0.4 miles west of P.A. Jct., is not equipped with an electric lock.

Rule 15.1—Trains from Bellingham Subdivision must receive track warrant prior to entering Scenic Subdivision.

5. Trackside Warning Detectors (TWD)

A. Protecting bridges, tunnels or other structures MP 9.7—DED—WWD—Recall Code 548 MP 6.0—DED—EWD—Main 2 MP 1661.6—DED—Recall Code 307 MP 1695.1—DED—Recall Code 307 MP 1697.3—DED—Recall Code 309 MP 1721.2—DED—EWD—Recall Code 317 MP 1725.5—DED—WWD—Recall Code 728 MP 1730.7—DED—EWD—Recall Code 738 MP 1740.5—DED—Recall Code 319

MP 1751.9—DED—Recall Code 337

MP 1771.1—DED—WWD—Recall Code 329

MP 1778.6—DED—EWD—Recall Code 338

B. Other TWD locations

MP 1654.7—Recall Code 278

MP 1661.6-DED-EWD-Recall Code 297

MP 1668.2—Recall Code 298

MP 1673.0—DED Exception Reporting

MP 1677.2—DED Exception Reporting

MP 1683.7—DED Exception Reporting

MP 1690.0—Recall Code 308

MP 1721.2—DED—WWD—Recall Code 317

MP 1725.5—DED EWD—Recall Code 728

MP 1730.7—DED—WWD—Recall Code 738

MP 1735.0—Recall Code 318

MP 1745.7—DED Exception Reporting

MP 1756.8—DED Exception Reporting

MP 1762.0—Recall Code 308

MP 1771.1—DED—EWD—Recall Code 329

MP 1776.2—Recall Code 348

MP 1765.8—DED Exception Reporting

MP 1778.6—DED—WWD—Recall Code 338

MP 27.2—Recall Code 358

MP 17.1—Recall Code 368

MP 9.7—DED—EWD—Recall Code 548

6. FRA Excepted Track

At Interbay—Zone 3, all tracks (service facility, roundhouse, material tracks, store track, rip tracks, and caboose track) except track 0340; Terry Avenue Line Zone 4; Dyke Team Zone 7; Ballard Lowline.

7. Special Conditions

Wenatchee—All eastbound trains must clear 9th Street Crossing, MP 1651.3. Distance between 9th Street and crossover No. 6 is 6,400 feet. When trains must pick up or set out power and cannot clear 9th Street crossing, they must use the East House Lead Switch at MP 1649.52. Distance between 9th Street and East House Lead is 9,300 feet.

Everett—Track 104, Mill A Track Loading Dock on north side will not clear a man on side of car.

Everett Jct.—Westward trains setting out must clear junction crossover switches unless train dispatcher authorizes otherwise.

Mukilteo—At Tank Farm Track 803, cars set out must be shoved 150 feet east of inside switch to permit use of stub track.

Mukilteo/Boeing Hill Operation—Crews that operate on Boeing Hill must have a copy of, and be conversant with, the "Boeing Hill Instructions."

46

Richmond Beach—Cars left on tracks 901 and 902 must be shoved to the Walk Bridge MP 13.86.

Balmer Yard Fueling Facility—The inside crossover switch from the main line to the fueling facility at MP 4.0, Balmer Yard, must be left lined for straight track when no movement over switch.

A stop sign has been installed at the south end of the Service Facility just west of the derail at MP 4.0. This stop sign will govern all movements into the Service Facility from the south end.

All movements, inbound power consists and switch engine movements, after stopping, must secure permission from the service foreman to pass the stop sign and get authority for movement over the derail. These radio instructions will be issued on Channel 84. When movement over derail is complete, immediately notify service foreman via radio.

Seattle—Between MP 1.0 and MP 0.0, Tunnel 17, trains carrying wide loads must not meet or pass other trains on adjacent track.

Remote Control Operations—Signs located at MP 7.0 (Scenic Subdivision) and MP 10.0X (Seattle Subdivision) designate the Remote Control Area at Seattle Terminal (Interbay, Stacy Street and South Seattle).

Mountain Grade Operation

Air Brake and Train Handling Rules for mountain grade operation apply on mountain grade between Skykomish and Berne, ruling grade ascending east 2.2; and between Berne and Merritt, ruling grade descending east 2.2.

The maximum number of powered axles in head end consist ascending mountain grade must not exceed 36.

The speed of trains must be controlled, at least in part, with automatic air brake when train tonnage exceeds 3,500 tons when operating on descending grades - MP 1731.3 to MP 1709.0 and MP 1700.5 to MP 1694.5.

ABTH Rule 102.12.6 Distributed Power/Helper Limitations and Placement, the following exception applies:

H EVESPO, H EVEPAS, and M SPOEVE symboled trains are exempt from the formula for helper position requirements. DP/ Helper consists must be cut in not less than one half the rated tonnage, nor more than the full rated tonnage of the consist.

Locomotive Ratings to be Utilized for Helper Placement Only—DC Locomotives:

1500-2999 hp = 1000 tons 3000-3999 hp = 1500 tons 4000 hp + = 2000 tons

AC Locomotives = 2500 tons

Train Size/Coupler Capacity Limitations Between Merritt and Skykomish—For the purpose of identifying coupler capacity limitations on the Scenic Subdivision:
Grade C equipment (General Service) is rated at 4,800 tons
Grade E equipment is rated at 6,000 tons

Doublestack equipment and Boeing cars will be considered to be equipped with Grade E equipment for the purpose of coupler capacity limitations. All other car types will be considered Grade C equipment in the application of the following instructions.

If it is not known that a car is equipped with high strength couplers, it can be determined by looking at the coupler casting identification located on top of the coupler. A high strength coupler will have the letter "E" as the LAST character of identification. Examples of high strength coupler identifications are E60THE, SBE60CE, and E60DE. NOTE: The term "helpers", in instructions below applies to

both manned helper and distributed power remote locomotive consists. All length limitations exclude locomotives.

Train Length/Coupler Capacity Limitation Without Helpers—Grade C Equipment - 4,800 tons, 7,000 feet All Grade E Equipment or Mixed Grade C and E - 6,000 tons, 7,000 feet (All Grade C equipment must be placed so that is has no more than 4,800 trailing tons.)

Except Westbound Intermodal trains, maximum total train length including power must not exceed 8,000 feet.

Train Length/Coupler Capacity Limitation With Helpers—9,600 tons and 7,700 feet

EXCEPTION: 7,700 feet limitation does not apply to Distributed Power trains.

NOTE: Coupler capacity limits above for non-helper trains apply to trailing tonnage behind helper placement.

Instructions Governing Operation of Trains Between Merritt and Skykomish—

- A. Skykomish—Siren located at Main Street crossing is under control of the City Fire Department. When activated, an emergency exists. The crossing must not be blocked and trains occupying must clear or cut it immediately.
- B. Merritt—Light helper locomotives or other light locomotives left unattended will be placed on west leg of wye, complying with Air Brake and Train Handling Rules.
- C. Helper units on eastward freight trains between MP 1708.3 east switch Scenic and MP 1700.0 east portal Cascade Tunnel will not exceed sixth throttle position.
- D. Scenic—Two white lights flashing alternately are mounted in a vertical position on a bracket attached to the power pole just east of east switch on south side of main track to indicate that the ventilating system is functioning. Eastward trains must not pass Scenic unless alternate flashing white lights are operating unless permission is given by train dispatcher. Exception: Eastward passenger trains, not exceeding two locomotives in the engine consist, may pass Scenic and enter Cascade Tunnel without the ventilating system functioning unless otherwise directed by the train dispatcher. Repeater ventilating system indicators are located at MP 1704.2 and MP 1702.4 in Cascade Tunnel.

Eastward trains between Scenic and Berne before entering west portal Cascade Tunnel No. 15 will advise Seattle East dispatcher if they have aluminum ore, and Seattle East dispatcher will activate the tunnel circuit, which will open the louvers, relieving pressure on this train. Eastward trains handling aluminum ore: do not exceed 15 MPH between bay 11 and bay 6, and at bay 6 gradually reduce speed not exceeding 10 MPH between bay 4 and east portal, advising Seattle East dispatcher as soon as engines clear east portal. Helper consist not permitted in trains requiring alternate ventilation.

E. Ventilating fans and tunnel door are located at the east portal of Cascade Tunnel. Westward absolute signal at MP 1700.3 is located 65 feet east of tunnel door, and eastward absolute signal at MP 1700.4 is located 100 feet west of tunnel door. When a train or engine is stopped by either of these signals, in addition to the usual observance of rules, contact with the train dispatcher must be made and great care must be taken before proceeding to see that the tunnel door is in the fully opened position.

If Cascade Tunnel door is closed, immediately contact train dispatcher and be governed by his instructions. Ascertain which door is in operation. New tunnel door is red-and-white checkerboard and is located east of the old

If old door is closed and if instructed to manually open the door, ascend the ladder on the south wall to top of door and cross catwalk to the north side. Face door and move long red handle to the left to engage hoist sprocket and cut off power to the door. Door may then be raised with chain hoist located to your left.

If new door is closed and if instructed to manually open the door:

- 1. Control box that housed the push button for emergency open of the tunnel door is located on the north wall to the west of the tunnel door and is locked with a switch lock (box is five feet from the top of the rail).
- To open tunnel door, remove switch lock from the control box and spin eye nut counterclockwise and push to the left; you can now open the box cover.
- Depress the push button marked open and an electric winch will pull the door to the full open position. Do not park under the old door when trying to operate emergency opening of the new tunnel door.

Crew of eastward or westward trains stopped in Cascade Tunnel must communicate with train dispatcher to assure tunnel ventilating fans are operating and east portal door is closed during the time train is standing.

After receiving permission from the train dispatcher, a train in the tunnel may make a back up movement to Scenic or Berne without flag protection and may pass signals without stopping except absolute signal at MP 1700.4.

Portable radios assigned for tunnel service—use channel 3 or channel 16, if 16-channel radio. If radio communication is inoperable, communication can be established by use of the dispatchers' phones, which are located in each bay.

If for any reason, a train is stopped in tunnel, members of crew on both head end and rear end of train must communicate with each other, and the train dispatcher. and have a thorough understanding whether train will make a forward or reverse movement out of tunnel. When a train is in the tunnel, the train dispatcher will ensure main track or siding between siding switches is clear at Scenic and Berne, alignment of switch is for the clear track to provide for a forward or reverse movement.

G. Fluorescent light located at Bay 14 is to alert westward trains as to location of signal 1706.1 when vision is obscured. Rule 9.1.13 of signal aspect and indication applies to signals 1706.1 and 1700.6.

Westward trains encountering signal 1706.1 at Bay 15 displaying Restricting indication must not pass west portal except in emergency, until it is known track is clear to east switch Scenic, in which case trains must stop and not pass the west portal until a flagman is sent out in advance to see whether or not the main track is blocked by a slide.

H. Survivair SCBA System-Employees in train operations must have received training on the operation of the Survivair SCBA System prior to operating/working trains through the Cascade Tunnel.

Chart A							
Location an	d Milepost	Phones, Air Hose, Wrench & Knuckles Type E & F	SCBA Emergency Replace- fment Cylinders	Rail Clamps and Chains	Distance Between Bays in Feet		
Telephone Booth Skykomish		Х					
Telephone Boo	th Scenic	Х		XX			
CTC Bungalow	E&W Scenic	Х					
Bay 21	MP 1707.88	Х	XXXXX		1200		
Bay 20	MP 1707.66	Х	XXXXX		1200		
Bay 19	MP 1707.43	X	XXXXX		1200		
Bay 18	MP 1707.20	X	XXXXX		1200		
Bay 17	MP 1706.97	Х	XXXXX		1200		
Bay 16	MP 1706.52	Х	XXXXX		2400		
Bay 15	MP 1706.06	Х	XXXXX		2400		
Bay 14	MP 1705.61	Х	XXXXX		2400		
Bay 13	MP 1705.16	Х	XXXXX		2400		
Bay 12	MP 1704.70	Х	XXXXX		2400		
Bay 11	MP 1704.24	Х	XXXXX		2400		
Bay 10	MP 1703.79	Х	XXXXX		2400		
Bay 9	MP 1703.33	Х	XXXXX		2400		
Bay 8	MP 1702.88	Х	XXXXX		2400		
Bay 7	MP 1702.42	Х	XXXXX		2400		
Bay 6	MP 1701.97	Х	XXXXX		2400		
Bay 5	MP 1701.52	Х	XXXXX		1200		
Bay 4	MP 1701.29	Х	XXXXX		1200		
Bay 3	MP 1701.06	Х	XXXXX		1200		
Bay 2	MP 1700.83	Х	XXXXX		1200		
Bay 1	MP 1700.60	Х	XXXXX		1200		
CTC Bungalow E&W Berne		Х		XX			
Merritt Depot		Х					

- Survivair SCBA Equipment must be checked out by qualified crew members of trains running through the Cascade Tunnel, at check out locations at Balmer yard or Wenatchee before leaving, and must be immediately accessible while in the Cascade Tunnel.
- See Chart A for locations of additional emergency material and emergency exits.

Conductor will make a report of material used, and from where taken, to the Mechanical Foreman, Trainmaster and Road Foreman Everett. If material is not returned to the bay from which taken, advise where it was left.

The Cascade Tunnel has 21 bays with markers on the north wall of the tunnel. The bays are numbered 1 through 21 east to west and are spaced as follows:

Bays 1-5 are 1200 feet apart Bays 5-17 are 2400 feet apart

Bays 17-21 are 1200 feet apart

Chart B has been developed using the following formula: Time = Distance/Rate to aid in calculating progress through the tunnel.

Chart B						
1	1200 FEE	Т	2	2400 FEE	Γ	
Min	Sec	MPH	Min	Sec	MPH	
	27	30		55	30	
	28	29		57	29	
	29	28		59	28	
	30	27	1	00	27	
	32	26	1	03	26	
	33	25	1	05	25	
	34	24	1	08	24	
	36	23	1	11	23	
	38	22	1	15	22	
	39	21	1	18	21	
	41	20	1	22	20	
	43	19	1	26	19	
	46	18	1	31	18	
	48	17	1	37	17	
	51	16	1	42	16	
	55	15	1	49	15	
	59	14	1	57	14	
1	03	13	2	06	13	
1	09	12	2	17	12	
1	15	11	2	29	11	
1	22	10	2	44	10	
1	31	9	3	02	9	
1	43	8	3	25	8	
1	57	7	3	54	7	
2	17	6	4	33	6	
2	44	5	5	28	5	

K. When necessary to set out bad order cars at Scenic or Berne, see that clamps are properly secured and blocked to the rail on low end of car. Clamps at Scenic fit rail on industry track. Clamps at Berne fit rail on siding. Crew picking up car, return clamps and chains to the Telephone Bungalow at Scenic or the storage container at the CTC Bungalow at Berne.

L. CASCADE TUNNEL EMERGENCY ACTION PLAN (See Chart C)

- Consider hazardous material involvement in each situation before any action taken.
- Consider operation of fans and direction of movement.
- If a train incident occurs requiring crew members to leave the locomotive cab to inspect their train, crew members must put on SCBA unit before investigating the problem(s). Hood must be worn with air activated if a crew member experiences breathing discomfort.
- If an emergency condition exists, such as a release of hazardous material, use of Survivair SCBA is required.
- If distance or situation warrants, walk out if necessary. Replacement air cylinders are located in each bay.

	Chart C					
Event	Action					
I. Undesired Emergency Air Brake Application, Break-in-two or Derailment	If any hazardous material is within tunnel, use breathing equipment immediately. After PCS (power cutoff switch) has reset on the lead locomotive, if air does not begin to restore within two minutes, observe the following: 1. If there is reasonable suspicion that a derailment has occurred, cut off locomotives if possible, if not, walk-exit the tunnel. Obtain supplemental breathing equipment as needed. 2. Use breathing equipment, evaluate, secure, and/or repair if possible. Obtain supplemental breathing equipment as needed.					
II. Fire (Obvious)	Eastward: 1. Cut off power, leave train angle cock open - exit tunnel. 2. Determine location of hazardous material in train, if any. 3. Shut off fans, after exit. 4. Close doors. 5. Do not return to tunnel. Westward: 1. Order fans shut off by dispatcher phone, and open door. 2. Cut off power, leaving angle cock open on train, exit tunnel. 3. Determine hazardous material in train, if any. 4. Close door after exit. 5. Do not return.					
III. Engine(s) derailed	Advise dispatcher - control fans to provide maximum fresh air. Shut down and secure all locomotive units. Exit tunnel using power if possible with dispatcher authority.					
Helper engines in train	Advise dispatcher. Exit tunnel either with the head end or back out with rear of train leaving angle cock open on portion of train left standing.					
Train with caboose	Eastward: Order fans shut off and exit if possible. Westward: Order fans remain on and exit if possible.					

Cascade Tunnel Communications—BNSF network telephones are located in each bay of the tunnel in protective boxes. When dialing a company number, you must dial 8+ (the number). A speed dial for the Seattle East Dispatcher is 616. In an emergency situation, dialing 9-911 will connect with the Wenatchee Emergency Operations, a standard 911 call.

There are two separate radio systems in the Cascade Tunnel. UHF for EOT, DP and VHF for voice radios. There are three ways to communicate via the VHF:

- 1. Dispatcher mainline radio Tx66/Rx66
- 2. Tunnel radio Tx66/Rx18
- 3. Blue MRAS Tx97/Rx34, phone 8-664-2201 If stopped in the Cascade Tunnel, Head-end can communicate with portable using Tunnel Radio channel or Blue MRAS radio channel. The phone in each bay may also be used to dial in to MRAS for communication if needed, as long as Head-end is also on MRAS. Should mainline radio fail, crew may utilize Blue MRAS to call and communicate with Dispatcher by dialing 8-234-1615.

ETD and HTD Failures—When an enroute failure occurs at anytime controlling locomotive is within or will be within the Cascade Tunnel, MP 1700.34 to MP 1708.17, train may proceed at maximum authorized speed as long as train is under control until entire train exits the Cascade Tunnel. If communications between HTD/EOT is lost enroute, the train must not pass Merritt (westbound) or Skykomish (eastbound) until communication is reestablished. A supply of replacement

batteries and EOT's will be available at Merritt (Tool House) and Skykomish (Depot). Notify dispatcher if battery or EOT is removed for use as well as Mechanical Help Desk with failure information.

Minimum Dynamic Brake Requirements

Before descending grades described in the following chart, it must be known that locomotive consist(s) has the minimum number of operative axles of dynamic brake. If train does not meet the minimum requirements as outlined, train must not proceed. For the purpose of this rule, the weight of locomotives with inoperative dynamic brakes is to be included in train's total trailing tonnage.

Minimum dynamic brake requirements for freight trains are: Westward, MP 1700 to MP 1731 Eastward, MP 1700 to MP 1693

On the descending grade locations stated above total brake pipe reduction to control speed should never exceed 15 psi. If total brake pipe reduction exceeds this value as outlined, train must be stopped immediately.

Total Trailing Train	TOB 85	TOB 86	TOB 96	TOB 106	TOB 116	TOB 126	TOB 136
Tonnage	or less	to 95	to 105	to 115	to 125	to 135	to 145
2,000 or less	4	4	4	4	6	6	8
2,001 to 3,000	6	6	6	6	8	8	10
3,001 to 4,000	8	8	8	8	10	10	12
4,001 to 5,000	8	8	10	10	12	12	14
5,001 to 6,000	12	12	12	12	14	14	16
6,001 to 7,000	12	12	12	14	16	16	18
7,001 to 8,000	12	12	12	14	16	16	20
8,001 to 9,000	12	12	14	16	18	20	22
9,001 to 10,000	12	12	14	18	20	22	24
10,001 to 11,000	12	12	14	18	22	24	28
11,001 to 12,000	12	12	16	20	24	26	30
12,001 to 13,000	12	12	18	22	26	28	32
13,001 to 14,000	12	12	18	24	28	30	34
14,001 to 15,000	12	14	20	26	30	32	36
15,001 to 16,000	12	14	20	26	30	34	38
16,001 to 17,000	14	16	22	28	32	36	40
17,001 to 18,000	16	18	24	30	34	38	44

Train Inspections—A member of the inbound crew on a through train operating cabooseless will give the outbound train a roll-by inspection and advise the outbound crew of the condition of the train, unless the outbound crew will not be immediately available or the inbound crew is otherwise relieved of duties.

Close Clearance—May exist on all auxiliary tracks.

Critical Areas—Locations identified as "Critical Areas" (See System Special Instruction 33, Flash Flood Warnings).

MP 1648.2 to MP 1700.3 MP 1721.8 to MP 1737.1 MP 1741.1 to MP 1748.0 MP 1750.4 to MP 1751.0 MP 1755.2 to MP 1755.8 MP 1758.0 to MP 1765.7

MP 1758.0 to MP 1765.7 MP 1771.2 to MP 1781.5

Short Mile—Between Gold Bar and Baring, MP 1748 does not exist. Distance between MP 1747 and MP 1749 is 4397 feet.

Test Mile Locations

MP 1655.4 to MP 1656.4 MP 1678.3 to MP 1679.3 MP 1777.2 to MP 1778.2 MP 24.0 to MP 25.0 MP 13.0 to MP 14.0

Grade Crossing Ordinances—Seattle city ordinance prohibits use of the locomotive whistle along Alaskan Way from Vine Street to Broad Street and at Galer Street, except if necessary to prevent an accident. The bell must be rung continuously at these locations. On grade crossings not equipped with gates, a crew member other than the engineer will be positioned on the locomotive or car, or flagging from the ground to look out for and give warning to the public of the approaching locomotive or cars when:

- •The controlling cab end of the locomotive is not on theforward end of a movement approaching a crossing, or
- Conditions exist due to weather, traffic, structures or other circumstances which impair the engineer's ability to see approaching traffic or the traffic to see the locomotive or cars.

Automatic Equipment Identification Locations

Wenatchee—MP 1651.9 Everett—MP 1776.3

Everett (Near Edmonds)-MP 17.60

Locations Having Individually Controlled Crossover Switches—

South Portal PA Jct.

Locations Approved for Gravity Drop Movements Interbay Yard

Identifying Signals—In signaled territory, when a train is passing a signal displaying other than "Clear" in advance of a control point, a crew member must transmit the following by radio:

Train Identification (Initials, Engine Number and Direction) Signal Name - In advance of (Control Point Location), on (Track) at (Speed) MPH.

Example of transmission:

"BNSF 6301 South approach medium in advance of Napavine South on Main 1 at 50 MPH (on single track main track designation is not necessary).

Exception: Due to radio congestion, transmission will not be made between MP 0.0 and MP 8.0.

8. Line Segments

Yard Line Segments

Line Segment Limits

470 Balmer Hump Yard 620 Balmer Yard 656 Wenatchee

Road Line Segments


Line Segment Limits

50 Ballard
37 Wenatchee to Everett Jct.
50 Everett Jct. Seattle
387 Wenatchee to MP 6.0X

50 NORTHWEST DIVISION—No. 3—April 26, 2006—Scenic Subdivision

9. Locations Not Shown as Stations

Name		Miles - Location	Capacit- y Cars	Switch Opens
02053	Monitor	3.6 east of Cashmere	10	West
02061	Dryden	6.1 east of Leavenworth	10	West
02144	Sultan	5.4 west of Gold Bar	10	East
02174	Boeing Plant on Spur	1.8 from Mukilteo	Yard	West
02185	Standard Oil Co's Tracks	2.6 west of Edmonds	81	West
02186	Richmond Beach	3.6 west of Edmonds	65	Both

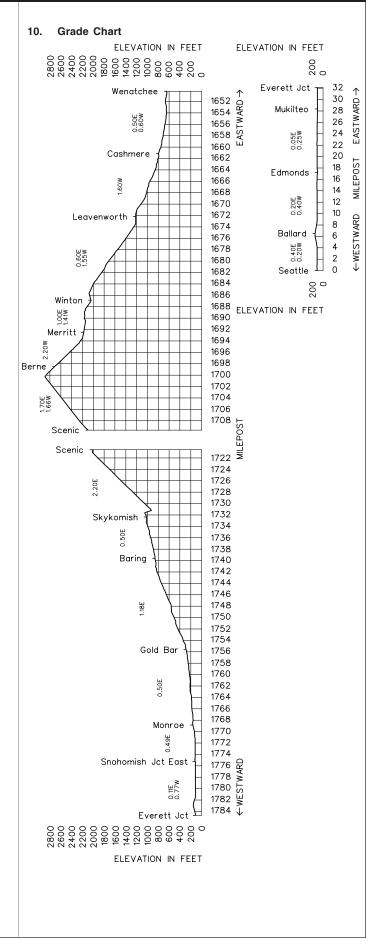

Length of Siding (Feet)	Station Nos.	Mile Post	Seattle Subdivision MAIN LINE STATIONS	Rule 4.3	Type of Oper.	Line Segment	Miles to Next Stn.
(i eet)	02200	0.0X	SEATTLE	BX(2)	2MT	Segment	2.1
	02201	2.1X	(King St. Station) SPOKANE STREET	TX(2)	CTC		0.4
		2.1X	COACH WYE	T T	змт		0.4
		3.2X	(Lander Main)	X	СТС		0.7
	02203		ARGO		2MT		
	02203	3.3X		X(2)	СТС		0.3 MT1-0.6
		3.6X	BAILEY GEORGETOWN	X(2)	-		MT2-2.7 MT3-1.8
= ====(a)		4.2X	(Main 1) VAN ASSELT	Х			MT1-2.
7,760(3)		5.4X	(Main 3))//O)	-		MT3-0.9
	02207	6.3X	RHODES	X(2)	3 MT CTC		0.3 MT1-3.0
		6.6X	BOEING RENTON JCT.	X(2)	-		MT1-3.0 MT2-3.4 MT3-2.9
		9.5X	(Main 3) SOUTH SEATTLE	J	-		MT3-0.5
	16001	9.6X	(Main 1)	В			MT1-0.4
	16004	10.0X	BLACK RIVER	X(2)			0.3
		10.3X	CP TUKWILA	JX			0.5
		10.8X	TUKWILA				0.5
9,170(2)	16005	11.3X	GLACIER PARK	Х			MT1-4.8 MT2-2.0
	16006	13.3X	ORILLIA (Main 2)	TX(2)		51	MT2-2.4
		15.7X	JAMES STREET (Main 2)				MT2-0.4
	16010	16.1X	KENT			51	0.8
		16.9X	WILLIS	X(2)			4.1
		21.0X	AUBURN NORTH	X(2)			0.5
		21.5X	AUBURN		2MT		MT1-2.5 MT2-0.
		21.6X	RAINIER (Main 2)	JT	СТС		MT2-0.2
	16014	21.8X	AUBURN YARD (Main 2)	Х			MT2-2.0
9,240(2)		23.8X	ELLINGSON (Main 2)			51	MT2-0.2
		24.0X	PACIFIC	X(2)			5.0
	16021	29.0X	SUMNER				0.7
		29.7X	CP SUMNER	X(2)			0.9
	16022	30.6X	MEEKER	J			1.3
	16023	31.9X	PUYALLUP			51	2.1
		34.0X	STEWART	X(2)			3.8
		37.8X	CLEAR CREEK	Х			0.4
		38.2X	TR JCT.	JX			0.2
	16029	38.4X	RESERVATION (Tacoma Main)	JX	3 MT CTC		0.2
		38.6X	BAY STREET	X(2)Y			0.4
		39.0X	RIVER STREET	MXY			0.3
	16031	39.3X	TACOMA	BTY	2MT		0.8
		40.1X	21ST STREET	MX(2)Y	ABS OCS		0.5
		0.0	11TH STREET	Y			2.7
		3.2	HARBOR	X(2)			1.9
	16038	5.1	RUSTON	(-/	2MT CTC		1.6
	16040	6.7	NELSON BENNETT		СТС		3.3
4,500(2)	16043	10.0	TITLOW		1		3.5
.,500(2)	16043	13.5	PIONEER	X(2)	1	52	0.9
				. ,	2MT		
	16048	14.4	WEST TACOMA NISQUALLY	M IV(2)	СТС		10.1
	16057	24.5	(To Lakeview 11.5)	JX(2)	-		3.7
	16061	28.2	SAINT CLAIR		1		4.0

Length of Siding (Feet)	Station Nos.	Mile Post	Seattle Subdivision MAIN LINE STATIONS	Rule 4.3	Type of Oper.	Line Segment	Miles to Next Stn.	↑ NORTHWARD
	16068	34.9	EAST OLYMPIA	JT			2.6	D
		37.5	PLUMB	X(2)			12.0	
	16084	49.5	WABASH	X(2)			MT1-3.0 MT2-4.5	
		52.5	CENTRALIA NORTH				MT1-1.5	
		54.0	CENTRALIA	BJTX			1.8	
		55.8	CENTRALIA SOUTH	X(2)			1.9	
		57.7	CHEHALIS				1.0	
		58.7	CHEHALIS JCT.	X(2)			7.5	
		66.2	NAPAVINE SOUTH	X(2)			10.8	
(2)4,900	16111	77.0	VADER	X(2)			8.0	
		85.0	MP 85	X(2)			8.4	
		93.4	OSTRANDER	X(2)			2.4	
(2)2,280	16128	95.8	ROCKY POINT		2MT	52	1.5	
(1)5,100	16130	97.3	KELSO		СТС	02	1.6	
		98.9	KELSO SOUTH	X(2)			2.2	
(1)9,382	16134	101.1	LONGVIEW JCT.	BJTX			1.5	
		102.6	LONGVIEW JCT. S	X(2)			4.9	
2,835	16140	107.5	KALAMA				3.4	
		110.9	MP 111	X(2)			7.4	
	16150	118.3	WOODLAND	X(2)			3.7	
(2)4,700	16155	122.0	RIDGEFIELD				1.6	
		123.6	RIDGEFIELD SOUTH	X(2)			7.1	
		130.7	FELIDA	X(2)			1.8	
		132.5	VANCOUVER JCT. N	X(2)			0.5	
	16166	133.0	RYE JCT.				3.5	
	12365	136.5	VANCOUVER	BMJTX(2)			176.6	

Radio Channel No. 70 in Service Seattle to Tukwila.

Radio Channel No. 87 in Service Tukwila to Nisqually.

Radio Channel No. 66 in Service Nisqually to Vancouver Jct N

Radio Channel No. 76 in service Vancouver Jct N to Vancouver.

UPRR Base Channel No. 2 in service Tacoma to Vancouver.

	Radio Call-In		
King St. Station - 53(X)	South Seattle - 40(X)	Black River 41(X)	
Auburn - 42(X)	Tacoma - 43(X)	Steilacoom - 52(X)	
Lacey - 50(X)	Plumb - 26(X)	Olympia/Lacey - 74(X)	
Chehalis South - 46(X)	Napavine - 24(X)	MP 85 - 25(X)	
Longview - 28(X)	Longview - 28(X) Ridgefield - 29(X)		
Emergency - Call 911			
Dispr X=0, Mechanical X=2, Field Support X=3, Warm Bearing X=5			

Train Dispatcher Telephone Numbers
Seattle Terminal Dispatcher—817-234-1613
Seattle East Dispatcher—817-234-1615
Centralia North Dispatcher—817-234-1623
Centralia South Dispatcher—817-234-1621
Vancouver Terminal Dispatcher—817-234-6125
UP Dispatcher, Omaha—402-636-1701

52 NORTHWEST DIVISION—No. 3—April 26, 2006—Seattle Subdivision

1. Speed-Regulations Passenger Freight MP 20 to MP 300 A								
1(A). Speed—Maximum MP 0.00 Mp MP 10.25 MP 0.00 X b MP 40.1X MP 10.20 b D MP 10.35 MP 0.00 X b MP 40.1X MP 10.20 b D MP 10.35 MP 0.00 X b MP 40.1X MP 10.20 b D MP 10.35 MP 0.00 X b MP 20.1X MP 10.20 b D MP 10.35 MP 0.00 X b MP 20.0X MP 10.20	1.	Speed Regulations				MD 100 0 to MD 106 6	Passenger	Freight
Peasurage	1(A).	Speed—Maximum						
MP 0.0 to MP 10.2 = 73.MPH	- (/-		Passenger	Freight				
MP 10 MP		MP 0.0 to MP 102.6	79 MPH	. 50 MPH.				
1(B). Speed—Permanent Restrictions MP DOX to MP 1 8X, Main 1 MP DOX to MP 1 8X, Main 1 and Main 2 MP DOX to MP 3 8X, Main 1 and Main 2 MP DOX to MP 3 8X, Main 1 and Main 2 MP DOX to MP 3 8X, Main 1 and Main 2 MP DOX to MP 3 8X, Main 1 and Main 2 MP DOX to MP 3 8X, Main 1 and Main 2 MP DOX to MP 3 8X, Main 1 and Main 2 MP DOX to MP 3 8X, Main 1 and Main 2 MP DOX to MP 3 8X, Main 1 and Main 2 MP DOX to MP 3 8X, Main 1 and Main 2 MP DOX to MP 3 8X, Main 1 and Main 2 MP DOX to MP 3 8X, Main 1 and Main 2 MP DOX to MP 3 8X, Main 1 and Main 2 MP DOX to MP 3 8X, Main 1 and Main 2 MP DOX to MP 3 8X, Main 1 and Main 2 MP DOX to MP 3 8X, Main 1 and Main 2 MP DOX to MP 3 8X, Main 1 and Main 2 MP DOX to MP 10X, Main 3 MP DOX to MP 10X, Main 1 and Main 2 MP DOX to		MP 0.0X to MP 40.1X	79 MPH	. 50 MPH.				
1(B). Speed—Permanent Restrictions MP 0.0x to MP 36.X Main 1 20MPH. MP 0.0x to MP 36.X Main 1 20MPH. MP 12X to MP 20X.M Main 2 20MPH. MP 12X to MP 20X.M Main 1 and Main 2 20MPH. MP 12X to MP 3.X Main 1 and Main 2 20MPH. MP 2X to MP 3.X Main 1 and Main 2 30MPH. MP 3.X to MP 3.X Main 1 and Main 2 30MPH. MP 3.X to MP 3.X Main 1 and Main 2 30MPH. MP 3.X to MP 3.X Main 1 and Main 2 30MPH. MP 3.X to MP 3.X Main 1 and Main 2 30MPH. MP 3.X to MP 3.X Main 1 and Main 2 30MPH. MP 3.X to MP 3.X Main 1 and Main 2 30MPH. MP 3.X to MP 3.X Main 1 and Main 2 30MPH. MP 3.X to MP 3.X Main 1 and Main 2 30MPH. MP 3.X to MP 3.X Main 1 and Main 2 30MPH. MP 3.X to MP 3.X Main 1 and Main 2 30MPH. MP 3.X to MP 3.X Main 1 and Main 2 30MPH. MP 3.X to MP 3.X Main 1 and Main 2 30MPH. MP 3.X to MP 3.X Main 3 30MPH. MP 3.X to		MP 102.6 to MP 136.5	79 MPH	. 60 MPH.		Amtrok Tolgo Troin Choods Maximum Chood		
MP DOX to MP 20X Man 2 DMPH 20MPH MP 20X DMPH								
MP 15X to MP 20X Main	1(B).	•						
MP 12X to MP 2.0X Min 1 and Main 2						,		
MP 2.0X to MP 3.4X, Main 1 and Main 2						MP 2.0X to MP 2.6X, Main 2	48 MPH.	
MP 2.1X to MP 3.2X Lander Main. 25 MPH. 40 MPH						MP 2.6X to MP 3.4X, Main 1 and Main 2	56 MPH.	
MP 3.3X to MP 5.1X, Main 3 MP 3.3X to MP 5.1X to						,		
MP 9.4 Xt b MP 6.7 X, Main 1 and Main 2								
MP 51X to MP 61X Main 3		· · · · · · · · · · · · · · · · · · ·				,		
MP 6 2X to MP 62X Man 3		MP 5.1X to MP 6.7X, Main 3	50 MPH	. 50 MPH.				
MP 9.8X to MP 10.0X, Man 1 and Man 2 6 MPH. MP 9.3X to MP 16.6X 40 MPH. MP 15.3X to MP 16.6X 40 MPH. MP 15.3X to MP 16.6X 40 MPH. MP 15.3X to MP 36.6X 40 MPH. MP 15.3X to MP 36.6X 40 MPH. MP 31.7X to MP 31.8X 65 MPH. 50 MPH. MP 31.7X to MP 31.8X 45 MPH. 50 MPH. MP 31.7X to MP 31.8X 45 MPH. 50 MPH. MP 34.6X to MP 36.8X 45 MPH. 50 MPH. MP 34.6X to MP 36.8X 45 MPH. 50 MPH. MP 36.6X to MP 36.8X 45 MP								
MR 9.8 AS DATE OF THE CONTROL OF THE								
MP 15.9X to MP 16.0X								
MP 27.4X to MP 30.7X TO MPH MP 31.5 to MP 31.8X SS MPH MP 34.4X to MP 34.6X 45.6MPH MP 34.4X to MP 34.6X 45.6MPH MP 34.4X to MP 36.6X 45.6MPH MP 36.5 to MP 36.8X 45.6MPH MP 36.5X to MP 36.8X 46.6MPH MP 36.5X to MP 36.5X 46.6MPH MP 36.5X t						MP 36.4X to MP 37.8X	52 MPH.	
MP 31.7X to MP 31 8X MP 34.6X to MP 36.0X MP 34.6X to MP 36.4X MP 36.5X to MP 37.0X								
MP 34-4X to MP 36-4X								
MP 94.6X to MP 96.6X								
MP 96.4X to MP 36.8X								
MP 93.8 X to MF 93.7 X 30 MPH 30 MPH MP 93.5 X to MF 90.0 X 30 MPH 30 MPH MP 23.6 X to MF 30.7 X 30 MPH 30 MPH MP 23.6 X to MF 90.0 X 30 MPH 30 MPH MP 24.6 X to MF 93.5 X to MF 90.0 X 30 MPH 30 MPH MP 24.6 X to MF 93.5 X to MF 90.0 X 30 MPH 30 MPH MP 24.6 X to MF 93.5 X to MF 9						-,		
MP 37.8X to MP 29.7X MP 30.0WPH, MP 30.0WPH, MP 30.0WPH, MP 28.0 to MP 28.0 MP 30.0WPH, MP 30.0WPH, MP 28.0 to MP 28.0 MP 30.0WPH, MP 30.0WPH, MP 31.0WPH, MP 31.0 to MP 6.5 MP 36.0 to MP 35.0 MP 36.0 MP 36.						•		
MP 95 7X to MP 0.0								
MP 0.0 to MP 2.8								
MP 5.1 to MP 6.5						MP 5.1 to MP 6.6	60 MPH.	
MP 6.5 to MP 9.5						MP 6.6 to MP 7.1	70 MPH.	
MP 9.5 to MP 9.8				-				
MP 9.8 to MP 10.3 MP 10.3 to MP 10.8 MP 10.3 to MP 10.8 MP 10.3 to MP 10.8 MP 10.5 to MP 13.2 MP 14.0 MP 13.2 to MP 14.0 MP 13.2 to MP 14.0 MP 14.1 to MP 14.3 MP 14.1 to MP 14.3 MP 14.3 to MP 15.9 MP 14.3 to MP 15.9 MP 15.9 to MP 19.9 MP 15.9 to MP 19.9 MP 15.9 to MP 19.9 MP 19.9 to MP 19.9 MP 19.3 to MP 23.8 MP 19.9 to MP 23.8 MP 19.3 to MP 23.8 MP 23.3 to MP 25.6 MP 19.3 to MP 23.8 MP 23.3 to MP 25.6 MP 19.3 to MP 23.8 MP 23.3 to MP 25.6 MP 23.3 to MP 25.6 MP 24.7 to MP 23.8 MP 27.7 to MP 28.1 MP 28.1 TO MP 28.1 MP 28.3 to MP 25.6 MP 28.3 to MP 26.5 MP 28.								
MP 10.3 to MP 10.8								
MP 10.2 to MP 13.2								
MP 13.2 to MP 14.3								
MP 14.10 MP 14.3 MP 14.9 MP 14.3 MP 14.10 MP 14.3 MP 15.9 MP 15.9 MP 19.9 MP 1								
MP 15.9 to MP 19.9								
MP 19.9 to MP 23.8						MP 21.9 to MP 23.8	67 MPH.	
MP 21.9 to MP 23.8 MP 23.8 to MP 25.6 55 MPH, 55 MPH, MP 27.7 to MP 28.1 70 MPH, 50 MPH, MP 33.8 to MP 35.6 70 MPH, 50 MPH, MP 35.8 to MP 36.5 70 MPH, 50 MPH, MP 35.7 to MP 36.5 70 MPH, 50 MPH, MP 47.7 to MP 47.9 MP 47.7 to MP 43.0 MP 47.7 to MP 43.0 MP 48.3 to MP 43.3 MP 47.7 to MP 47.9 MP 53.7 to MP 53.7 MP 53.7 to MP 53.7 MP 53.7 to MP 53.7 MP 53.0 to MP 63.0 MP 45.8 to MP 45.9 MP 53.1 to MP 54.3 MP 53.1 to MP 54.3 MP 53.1 to MP 53.7 MP 53.0 to MP 54.5 MP 47.7 to MP 47.9 MP 50.1 to MP 47.9 MP 50.1 to MP 47.9 MP 63.0 to MP 63.0 MP 45.7 to MP 47.9 MP 53.0 to MP 63.0 MP 45.1 to MP 53.7 MP 47.7 to MP 47.9 MP 63.0 to MP 63.0 MP 45.1 to MP 53.7 MP 53.0 to MP 63.0 MP 45.1 to MP 53.7 MP 53.0 to MP 63.0 MP 45.1 to MP 53.7 MP 53.0 to MP 50.1 MP 50.1 to MP 50.1 MP 50.								
MP 23.8 to MP 25.6								
MP 27.7 to MP 28.1 MP 33.8 to MP 34.2 70 MPH. 50 MPH. MP 36.2 to MP 36.5 70 MPH. 50 MPH. MP 41.4 to MP 41.7 70 MPH. 50 MPH. MP 46.0 to MP 47.7 70 MPH. 50 MPH. MP 47.7 to MP 47.9 MP 47.7 to MP 47.9 MP 51.2 to MP 51.4 MP 62.3 to MP 63.0 MP 45.7 MP 45.7 to MP 54.3 MP 45.7 to MP 54.3 MP 62.3 to MP 63.0 MP 63.0 to MP 64.5 MP 65.1 MP 67.1 to MP 70.4 MP 67.1 to MP 70.7 MP 68.0 to MP 68.0 MP 70.1 to MP 70.7 MP 77.8 to MP 70.5 MP 70.5 to MP 98.8 MP 97.2 to MP 98.8 MP 98.3 to MP 98.5 MP 98.3 to MP 98.5 MP 100.3 to MP 100.6 MP MP 100.3 to MP 100.								
MP 33.8 to MP 34.2		MP 27.7 to MP 28.1	70 MPH	. 50 MPH.				
MP 362 to MP 36.5								
MP 44.6 to MP 41.7								
MP 47.7 to MP 47.9								
MP 51.2 to MP 51.4 MP 51.4 to MP 53.7 MP 51.4 to MP 53.7 MP 51.5 to MP 54.3 MP 51.5 to MP 54.3 MP 51.5 to MP 54.3 MP 62.3 to MP 63.0 MP 63.0 MP 63.0 to MP 64.5 MP 63.0 to MP 64.5 MP 63.0 to MP 64.5 MP 64.5 to MP 65.1 MP 69.1 to MP 70.7 MP 70.7 to MP 71.6 MP 70.7 to MP 71.6 MP 80.9 to MP 80.0 MP 80.0 to MP 80.0 MP 91.0 to MP 91.2 MP 70.7 to MP 71.3 MP 70.7 to MP 71.3 MP 70.7 to MP 71.6 MP 80.0 to MP 80.0 MP 80.0 to MP 80.0 MP 80.0 to MP 80.0 MP 91.0 to MP 91.2 MP 95.0 to MP 95.3 MP MP 95.0 to MP 95.3 MP MP 95.0 to MP 95.3 MP MP 80.0 to MP 80.0 MP 91.0 to MP 91.2 MP 95.0 to MP 95.3 MP MP 95.0 to MP 95.3 MP MP 95.0 to MP 95.3 MP MP 95.0 to MP 96.3 MP 95.0 to MP 96.3 MP MP 95.0 to MP 90.3 MP 10.0 MP 80.0 to MP 80.0 MP 95.0 to MP 96.3 MP MP 95.0 to MP 96.3 MP MP 95.0 to MP 96.3 MP MP 95.0 to MP 90.3 Mp 10.0 MP 80.0 to MP 80.0 MP 91.0 to MP 91.2 MP 90.0 to MP 91.2 MP 90.0 to MP 91.2 MP 90.0 to MP 90.3 Mp 10.0 MP 80.0 to MP 80.0 MP MP 80.0 to MP 80.0 MP MP 80.0 to MP 80.0 MP 80.0 to MP 90.0 MP 80.0 to MP 90.0 MP 90.0 to MP 91.2 MP 90.0 to MP 90.0 MP 80.0 to MP 90.0 MP 80.0 to MP 90.0 MP 90.0 to MP 90.0 MP 80.0 to MP 90.0 MP 90.0 to MP 90.0 MP						MP 69.1 to MP 70.4	67 MPH.	
MP 51.4 to MP 53.7								
MP 53.7 to MP 54.3								
MP 62.3 to MP 63.0								
MP 63.0 to MP 64.5 m MP 65.1 m MP 4.5 m MP 65.1 m MP 66.1 m MP 66.								
MP 64.5 to MP 65.1								
MP 69.1 to MP 70.4 to MP 70.7 to MP 70.7 to MP 70.7 to MP 70.7 to MP 71.3 to MP 71.3 to MP 71.3 to MP 71.6 to MP MP 71.3 to MP 71.6 to MP MP 55 MPH. MP 77.8 to MP 79.5 to MP 81.6 to MP 81.6 to MP 81.8 to MP 81.8 to MP 81.8 to MP 83.2 to MP MP 50.0 to MP 80.9 to MP 80.9 to MP 87.2 to MP MP 80.9 to MP 87.2 to MP MP 80.9 to MP 89.8 to MP 100.3 to MP 100.0 to MP 91.2 to MP 91.0 to MP 91.2 to MP 93.7 to MP 95.0 to MP MP 40.0 to MP 91.2 to MP 93.7 to MP 95.0 to MP MP 30.7 to MP 95.0 to MP 80.9 to MP 80.0 to MP 80.0 to MP MP 30.0 to MP 80.0 to MP 80.0 to MP 30.0 to MP 80.0 to MP 30.0								
MP 70.7 to MP 71.3								
MP 71.3 to MP 71.6 60 MPH. 50 MPH. MP 77.8 to MP 79.5 to MP 81.6 70 MPH. 50 MPH. MP 79.5 to MP 81.6 70 MPH. 50 MPH. MP 81.6 to MP 81.8 66 MPH. 50 MPH. MP 81.8 to MP 83.2 65 MPH. 50 MPH. MP 85.4 to MP 86.9 75 MPH. 50 MPH. MP 86.9 to MP 87.2 60 MPH. 50 MPH. MP 89.0 to MP 89.8 66 MPH. 50 MPH. MP 89.0 to MP 89.8 66 MPH. 50 MPH. MP 89.8 to MP 91.0 70 MPH. 50 MPH. MP 91.0 to MP 91.2 60 MPH. 50 MPH. MP 91.2 to MP 93.7 70 MPH. 50 MPH. MP 91.2 to MP 93.7 70 MPH. 50 MPH. MP 95.0 to MP 97.2 45 MPH. 40 MPH. MP 97.2 to MP 100.3 70 MPH. 50 MPH. MP 97.2 to MP 100.3 70 MPH. 50 MPH. MP 100.3 to MP 100.3 70 MPH. 50 MPH. MP 100.3 to MP 100.3 70 MPH. 50 MPH. MP 100.3 to MP 100.5 70 MPH. 50 MPH. MP 100.3 to MP 100.5 70 MPH. 50 MPH. MP 100.3 to MP 100.5 70 MPH. 50 MPH. MP 100.3 to MP 100.5 70 MPH. 50 MPH. MP 100.3 to MP 100.5 70 MPH. 50 MPH. MP 100.3 to MP 100.5 70 MPH. 50 MPH. MP 100.3 to MP 100.5 70 MPH. 50 MPH. MP 100.3 to MP 100.5 70 MPH. 60 MPH. MP 110.8 to MP 114.8 75 MPH. 60 MPH. MP 119.8 to MP 122.9 70 MPH. 60 MPH. MP 119.8 to MP 122.3 70 MPH. 60 MPH. MP 119.8 to MP 122.3 70 MPH. 60 MPH. MP 119.8 to MP 122.3 70 MPH. 60 MPH. MP 119.8 to MP 122.3 70 MPH. 60 MPH. MP 119.8 to MP 122.3 70 MPH. 60 MPH. MP 119.8 to MP 122.3 70 MPH. 20 MPH.						MP 93.7 to MP 95.0	67 MPH.	
MP 77.8 to MP 79.5								
MP 79.5 to MP 81.6 70 MPH. 50 MPH. MP 81.6 to MP 81.8 60 MPH. 50 MPH. MP 81.8 to MP 83.2 65 MPH. 50 MPH. MP 85.4 to MP 86.9 75 MPH. 50 MPH. MP 86.9 to MP 87.2 60 MPH. 50 MPH. MP 89.0 to MP 89.8 60 MPH. 50 MPH. MP 89.0 to MP 89.8 60 MPH. 50 MPH. MP 91.0 to MP 91.0 70 MPH. 50 MPH. MP 91.0 to MP 91.2 60 MPH. 50 MPH. MP 91.2 to MP 93.7 70 MPH. 50 MPH. MP 91.2 to MP 93.7 70 MPH. 50 MPH. MP 99.7 to MP 95.0 to MP 95.0 60 MPH. 50 MPH. MP 97.2 to MP 95.0 to MP 97.2 45 MPH. 40 MPH. MP 100.3 to MP 100.5 70 MPH. 50 MPH. MP 100.3 to MP 100.5 70 MPH. 50 MPH. MP 100.3 to MP 100.5 70 MPH. 50 MPH. MP 100.3 to MP 100.5 70 MPH. 50 MPH. MP 100.3 to MP 100.5 70 MPH. 60 MPH. MP 118.8 to MP 119.8 75 MPH. 60 MPH. MP 119.8 to MP 122.3 70 MPH. 60 MPH. MP 119.8 to MP 122.3 70 MPH. 60 MPH. MP 119.8 to MP 122.3 70 MPH. 60 MPH. MP 119.8 to MP 122.9 70 MPH. 25 MPH. MP 122.3 to MP 122.9 70 MPH. 25 MPH. MP 119.8 to MP 122.3 70 MPH. 60 MPH. MP 119.8 to MP 122.3 70 MPH. 25 MPH. MP 122.3 to MP 122.9 70 MPH. 25 MPH. MP 122.3 to MP 122.9 70 MPH. 25 MPH. MP 122.3 to MP 122.9 70 MPH. 25 MPH. MP 122.3 to MP 122.9 70 MPH. MP 122.3 to MP 122.9 70 MPH. 70 MPH. MP 122.3 to MP 100.3 to MP 100.3 to MP 100.3 70 MPH. 50 MPH. MP 136.2 to MP 136.5 35 MPH. 30 MPH. MP 136.2 to MP 136.5 35 MPH. 30 MPH. MP 122.3 to MP 122.9 70 MPH. 50 MPH. MP 122.3 to MP 122.9 70 MPH. 50 MPH. MP 122.3 to MP 122.9 70 MPH. 50 MPH. MP 136.2 to MP 136.5 35 MPH. 30 MPH. MP 136.2 to MP 136.5 35 MPH. 30 MPH. MP 136.2 to MP 136.5 35 MPH. 30 MPH. MP 136.2 to MP 136.5 35 MPH. 30 MPH. MP 136.2 to MP 136.5 35 MPH. 30 MPH. MP 136.2 to								
MP 81.8 to MP 81.8						, , , , , , , , , , , , , , , , , , ,		
MP 81.8 to MP 83.2 65 MPH. 50 MPH. MP 85.4 to MP 86.9 75 MPH. 50 MPH. MP 86.9 to MP 87.2 60 MPH. 50 MPH. MP 89.0 to MP 89.8 60 MPH. 50 MPH. MP 89.8 to MP 91.0 70 MPH. 50 MPH. MP 91.0 to MP 91.2 60 MPH. 50 MPH. MP 91.2 to MP 93.7 70 MPH. 50 MPH. MP 93.7 to MP 95.0 to MP 95.0 to MP 97.2 to MP 100.3 70 MPH. MP 100.3 to MP 100.3 to MP 100.6 60 MPH. 50 MPH. MP 100.3 to MP 100.6 60 MPH. 50 MPH. MP 100.3 to MP 100.6 60 MPH. 50 MPH. MP 100.3 to MP 100.6 60 MPH. 50 MPH. MP 118.8 to MP 114.8 75 MPH. 60 MPH. MP 118.8 to MP 119.8 to MP 119.8 to MP 122.3 to MP 122.9 50 MPH. MP 132.0 to MP 100.5 31 MPH 122.3 to MP 136.2 to MP 136.5 35 MPH. MP 136.2 to		MP 81.6 to MP 81.8	60 MPH	. 50 MPH.				
MP 86.9 to MP 87.2						· · · · · · · · · · · · · · · · · · ·		
MP 86.9 to MP 87.2 60 MPH. 50 MPH. MP 89.0 to MP 89.8 60 MPH. 50 MPH. MP 89.8 to MP 91.0 70 MPH. 50 MPH. MP 91.0 to MP 91.2 60 MPH. 50 MPH. MP 91.2 to MP 93.7 70 MPH. 50 MPH. MP 91.2 to MP 93.7 70 MPH. 50 MPH. MP 95.0 to MP 95.0 60 MPH. 50 MPH. MP 95.0 to MP 97.2 to MP 100.3 70 MPH. MP 100.3 to MP 100.6 60 MPH. 50 MPH. MP 100.3 to MP 100.6 60 MPH. 50 MPH. MP 118.8 to MP 114.8 75 MPH. 60 MPH. MP 119.8 to MP 119.8 10 MP 119.8 10 MP 122.3 10 MP 122.9 Main 1 53 MPH. MP 122.3 to MP 122.9 Main 2 65 MPH. MP 132.6 to MP 136.2, Main 2 67 MPH. MP 132.6 to MP 136.2, Main 2 67 MPH. MP 132.6 to MP 136.2, Main 2 70 MPH. MP 136.2 to MP 136.2, Main 2 70 MPH. MP 136.2 to MP 136.2, Main 2 70 MPH. MP 136.2 to MP 136.2 to MP 136.2, Main 2 70 MPH. MP 136.2 to MP 136.2 to MP 136.2, Main 2 70 MPH. MP 136.2 to MP 136.2 to MP 136.2, Main 2 70 MPH. MP 136.2 to MP 136.2, Main 2 70 MPH. MP 136.2 to MP 136.2 to MP 136.2, Main 2 70 MPH. MP 136.2 to MP 136.2, Main 2 70 MPH. MP 136.2 to MP 136.2, Main 2 70 MPH. MP 136.2 to MP 136.2, Main 2 70 MPH. MP 136.2 to MP 136.2, Main 2 70 MPH. MP 136.2 to MP 136.2, Main 2 70 MPH. MP 136.2 to MP 136.2, Main 2 70 MPH. MP 136.2 to MP 136.2, Main 2 70 MPH. MP 136.2 to MP 136.2, Main 2 70 MPH. MP 136.2 to MP 136.2, Main 2 70 MPH. MP 136.2 to MP 136.2, Main 2 70 MPH. MP 136.2 to MP 136.2, Main 2 70 MPH. MP 136.2 to MP 136.2, Main 2 70 MPH. MP 136.2 to MP 136.2, Main 2 70 MPH. MP 136.2 to MP 136.2, Main 2 70 MPH. MP 136.2 to MP 136.2, Main 2 70 MPH. MP 136.2 to MP 136.2, Main 2 70 MPH. MP 136.2 to MP 136.2 to MP 136.2, Main 1 70 MPH. MP 136.2 to MP 136.2 to MP 136.2, Main 2 70 MPH. MP 136.2 to MP								
MP 89.8 to MP 91.0 MP 99.0 to MP 99.0 MP 91.0 to MP 91.2 MP 91.0 to MP 91.2 MP 91.2 to MP 93.7 MP 93.7 to MP 95.0 MP 95.0 to MP 97.2 MP 97.2 to MP 100.3 MP 100.3 to MP 100.6 MP 100.3 to MP 100.6 MP 100.3 to MP 108.5 MP 114.4 to MP 114.8 MP 118.8 to MP 119.8 MP 122.3 to MP 122.9 Main 1 MP 122.8 to MP 122.9 Main 2 MP 122.8 to MP 122.9 Main 2 MP 122.8 to MP 122.9 Main 1 MP 122.8 to MP 122.9 Main 1 MP 122.8 to MP 122.9 Main 1 MP 122.8 to MP 122.9 Main 2 MP 132.6 to MP 136.2 MP 133.1 to MP 136.2 MP 133.1 to MP 136.2 MP 136.2 to MP 136.5 MP 136.2 to MP 136.2 MP 136.2 to MP 136.5 MP 136.2 to MP 136.5 MP 136.2 to MP 136.2 MP 136.2 to MP 13								
MP 91.0 to MP 91.2								
MP 91.2 to MP 93.7 70 MPH. 50 MPH. MP 93.7 to MP 95.0 60 MPH. 50 MPH. MP 95.0 to MP 97.2 45 MPH. 40 MPH. MP 97.2 to MP 100.3 to MP 100.6 60 MPH. 50 MPH. MP 100.3 to MP 100.6 60 MPH. 50 MPH. MP 108.2 to MP 108.5 70 MPH. 60 MPH. MP 114.4 to MP 114.8 75 MPH. 60 MPH. MP 119.8 to MP 119.8 75 MPH. 60 MPH. MP 119.8 to MP 122.3 to MP 129.3 70 MPH. 60 MPH. MP 119.8 to MP 129.3 70 MPH. 60 MPH. MP 122.3 to MP 129.3 to						· ·		
MP 93.7 to MP 95.0 60 MPH. 50 MPH. MP 95.0 to MP 97.2 45 MPH. 40 MPH. MP 100.3 to MP 100.6 60 MPH. 50 MPH. MP 108.5 70 MPH. 60 MPH. MP 118.8 to MP 114.8 75 MPH. 60 MPH. MP 119.8 to MP 119.8 75 MPH. 60 MPH. MP 119.8 to MP 122.3 70 MPH. 60 MPH. MP 119.8 to MP 122.3 70 MPH. 60 MPH. MP 122.3 to MP 122.3 70 MPH. 35 MPH. MP 122.3 to MP 122.9 50 MPH. 35 MPH. MP 122.3 to MP 122.9 50 MPH. 35 MPH. MP 122.3 to MP 122.9 50 MPH. 35 MPH. MP 122.3 to MP 122.9 50 MPH. MP 122.3 to MP 133.1 to MP 136.2 to MP 136.2, Main 2 70 MPH. MP 136.2 to MP 136.5 35 MPH. MP 136.2 to MP 136.5								
MP 95.0 to MP 97.2								
MP 97.2 to MP 100.3								
MP 108.2 to MP 108.5		MP 97.2 to MP 100.3	70 MPH	. 50 MPH.		INIT 130.2 (U IVIT 130.5	JO IVIPH.	
MP 114.4 to MP 114.8		MP 100.3 to MP 100.6	60 MPH	. 50 MPH.	1(0)	Speed—Switches and Turnoute		
MP 118.8 to MP 119.8				. 00 WII 11.	٠(٠).		35 MDU	30 MDH
MP 119.8 to MP 122.3								
MP 122.3 to MP 122.9 50 MPH 35 MPH Lucile, Main 1 to Lander Main								
Lucile, Lander Main to Main 1						Lucile, Main 1 to Lander Main	25 MPH	25 MPH.
				. 50 .711 1 1.		Lucile, Lander Main to Main 1	25 MPH	25 MPH.

	Argo, NWD crossover Main 2 to Main 1	Passenger	Freight 30 MPH
	Argo, SWD crossover Main 1 to Main 2		
	Bailey, NWD crossover Main 2 to Main 1		
	Bailey, SWD crossover Main 1 to Main 2		
	Bailey, NWD crossover Main 1 to Main 2		
	Bailey, SWD crossover Main 2 to Main 1		
	Bailey, Main 3 to Main 2		
	Rhodes, Main 3 to Main 2		
	Rhodes, Main 2 to Main 1 Boeing, Main 3 to Main 2		
	Boeing, Main 2 to Main 1		
	Black River		
	CP Tukwila		
	Glacier Park	50 MPH	50 MPH.
	Orillia	50 MPH	50 MPH.
	James Street		
	Willis		
	Auburn North		
	Rainier	20 MPH	20 MPH.
	Auburn Yard, north sw. of controlled siding on Main 2 at MP 21.7X	35 MPH	35 MPH.
	Ellingson, South Switch of controlled siding on		
	Main 2 at MP 23.8X to controlled siding		
	Pacific		
	CP Sumner		
	Stewart		
	TR Jct.		
	Bay Street		
	MP 38.4, Reservation, through Jct. with UPRR		
	MP 38.4, Reservation, entering or leaving Tacoma		
	via Work Lead or Drawbridge Main		10 MPH.
	Through crossover turnouts: Titlow, Pioneer, Nise	qually,	
	Plumb, Wabash, Centralia South, Chehalis Jo	t.,	
	Napavine South, Vader, MP 85.0, Ostrander,		
	Kelso South, Longview Jct. South, MP 111,		
	Ridgefield South, Vancouver Jct. N		
	Harbor		
	Ruston		
	Nelson Bennett		
	Woodland		
	Felida		
	Trains over 100 TOB must not exceed 35 MPH th		
	40 MPH and 50 MPH, and must not exceed 25 MF		
	shown as 35 MPH.	Ü	
1(D).	Speed—Other		
	Seattle—King St. Station,	10 MPH	5 MPH.
	Seattle—Over public crossings	20 MPH	20 MPH.
	South Seattle Yard, MP 8.0X crossover	5 MDII	E MDII
	between Storage 2 and Storage 3		5 MPH.
	Spokane St., MP 1.8X SWD MT 1 (HER) Kent Industrial Lead. between	ZU IVIPA.	
	Orillia and James Street	10 MPH	10 MPH
	MP 31.7X to MP 31.8X (HER)		. 5 1411 1 1.
	Lakeview Spur, MP 11.5X to MP 0.0X		10 MPH.
	South Tacoma, MP 3.0 to Roy, MP 21.0		
	Centralia—north leg of wye	5 MPH	5 MPH.
	On sidings:		
	Glacier Park	25 MPH	25 MPH
	Ellingson		
	All other sidings		
	•		
	Rye Jct. to Rye Tacoma—Amtrak Lead		
	Speed through Amtrak Lead adjoining turnouts		
	, , ,		
	See Item 1 of the System Special Instructions.	tions for add	itional
2.	Bridge and Equipment Weight Restrict	tions	
	Maximum Gross Weight of Car		
	· ·	2 tono Do-t-	diation D
	Seattle to Vancouver		
	Seattle to West Seattle		
	Port of Tacoma Spur 14	ತ tons, Hesti	iction E
	Longview Jct. to Longview Yard		
	over Bridge 0.5914	3 tons, Restr	rction D

Other bridges in Longview	134	tons,	Restriction G
Rye Jct. to Rye	134	tons,	Restriction G
Lakeview to Roy	143	tons,	Restriction D
Lakeview to Nisqually	134	tons,	Restriction G

Six-axle locomotives heavier than 175 tons not permitted on tracks 1060 through 1065 and Occidental Lead.

Six-axle derricks not permitted on Port of Tacoma spur.

Trains over 100 TOB and grain storage are not permitted on Chehalis Main 1, or on the two sidings.

Kalama-Maximum of two (2) locomotives allowed on Peavey Grain Elevator tracks, stub track one (1) and two (2).

Lakeview Industrial Park—Only one locomotive allowed in for switching operation. Six-axle locomotives not permitted.

3. Type of Operation

CTC-in effect: MP 0.0X to MP 38.6X MP 4.2X to MP 4.3X, PC Running MP 6.3X to MP 6.6X, PC-1 MP 3.2 to MP 136.5

Multiple Main Tracks—in effect:

2 MT

MP 0.0X to MP 2.1X

MP 3.2X to MP 3.6X

MP 10.0X to MP 38.2X

MP 38.6X to MP 5.1

MP 6.6 to MP 136.5

3 MT

MP 2.1X to MP 3.2X

MP 3.6X to MP 10.0X

MP 38.2X to MP 38.6X

ABS-in effect:

MP 38.6X to MP 3.2

Yard Limits-in effect:

MP 38.6X to MP 3.2

Occupancy Control System—in effect:

MP 38.6X to MP 3.2

Between MP 38.6X and MP 3.2, trains and engines may occupy the main track on signal indication of a controlled signal or verbal OCS permission.

Interlockings and Drawbridges Not Indicated at Station D Street, MP 39.6X, Manual Interlocking-Main 2 only.

West Seattle Line Drawbridge, MP 36.8.

West Tacoma, Drawbridge 14-Manual interlocking-When a signal displays a Stop indication, and no control operator (bridge tender) is on duty, a crew member must precede the movement between the outer opposing Absolute signals of the interlocking, examine the track for defects, determine that the route is properly lined and that the derails are in the nonderailing position. The crew member must also verify that the drawbridge is in the proper position for the train to pass. The crew member may then authorize the train to proceed through the limits at restricted speed. Before proceeding into or continuing in CTC territory, the crew member must be sure that the CTC control operator has given authority to proceed.

Maintenance of Way employees may occupy the manual interlocking on verbal authority from the bridgetender. The bridgetender must provide protection for the movement until the Maintenance of Way employee has reported clear of the limits. If no bridgetender is on duty, the Maintenance of Way employee must ensure that the bridge and derails are properly lined before proceeding.

Manual Interlockings Not Using Track and Time (Rule 10.3) to Protect MW Employees—

River Street, MP 39.0X D Street, MP 39.6X 21st Street, MP 40.1

Maintenance of Way employees may occupy interlockings on OCS authority from train dispatcher.

Seattle—Train, yard and engine movements between the freight yard and Fifth Avenue tracks will be made via the UP yard track Oregon Street connection. The UP timetable will govern.

Between East Olympia and Olympia—Union Pacific rules and timetable govern.

Between TR Jct and Freight House Square—Tacoma Railway rules and timetable govern.

4. General Code of Operating Rules Items

Rule 1.47—For Seattle Sounder operations only, when a signal requires the train to stop at or pass the next signal at restricted speed, the engineer must communicate this fact, including the track designation if on multiple tracks, to a designated member of the crew and get an acknowledgment. If no acknowledgment is received, the engineer must ascertain at the next scheduled stop why the message is not being confirmed. If the engineer fails to control the train movement in accordance with either a wayside signal or other restrictions imposed upon the train, the designated crew member shall at once communicate with and caution the engineer regarding the restriction, and if necessary, take appropriate action to ensure the safety of the train, including stopping all movement if appropriate.

Rule 5.8.1/Rule 5.8.2—Seattle, King Street Station—When initiating movement, passing or approaching platform: Engine or cab bell must be rung. Do not sound whistle signals unless emergency or to warn employees.

Rule 5.10—All commuter locomotives must have red markers displayed when locomotive is in trailing position.

Rule 6.19—When flagging is required, the distance will be 2.5 miles

Rule 6.26—The 3 main tracks between MP 2.1X and MP 3.2X are designated as follows: Looking southward from MP 2.1X, the track on the right is Lander Main, the track in the center is Main 1, and the track on the left is Main 2.

The 3 main tracks between MP 3.6X and MP 10.0X are designated as follows: Looking southward from MP 3.6X the track on the right Main 1, the track in the center is Main 2 and the track on the left is Main 3

The 3 main tracks between MP 38.2X and MP 38.6X are designated as follows: Looking southward from MP 38.2X, the track on the right is Tacoma Main, the track in the center is Main 1, and the track on the left is Main 2.

Rule 6.28—in effect:

Nisqually MP 11.5X to Lakeview MP 0.0X South Tacoma MP 3.0 to Roy MP 21.0 Rye Jct. MP 0.0 to Rye MP 3.6

Rule 6.32.6—Blocking Public Crossings

Following crossings adjacent to passenger stations must not be blocked by a standing train during commuter rail operations:

Kent—Smith Street Auburn—Main Street Sumner—Maple Street Puyallup—Meridian Street Rule 9.1.8—For passenger operations only, the "Approach" signal indication is changed to read: Proceed prepared to stop at the next signal, trains exceeding 40 MPH immediately reduce to that speed.

Rule 9.1.12—For passenger operations only, the "Diverging Approach" signal indication is changed to read: Proceed on diverging route not exceeding prescribed speed through turnout; approach next signal preparing to stop, if exceeding 40 MPH immediately reduce to that speed.

Rule 9.9—For Seattle Sounder operations only, in CTC when any train stops or its speed is reduced below 10 mph, the train must proceed at a speed not exceeding 40 mph, prepared to stop at the next signal until the next signal is visible and that signal displays a proceed indication.

Rule 15.1—Trains operating between Tukwila and Vancouver must receive a general track bulletin prior to departure from initial station.

MWOR Rule 8.12—Crossover Switches, the following paragraph is added on the Seattle Subdivision:
At signaled locations identified in the timetable/general orders as having individually controlled crossover switches (ICS), MW employees may ask the control operator for permission to operate one end of the crossover for maintenance or testing purposes only. Trains, engines and on-track equipment must not be used or allowed within the defined working limits of the individual switch involved during such operations. The individually controlled crossover switch must be left lined and secured in the normal position prior to reporting clear of the working limits.

MWOR Rule 8.14—Conflicting Movements Approaching Switch, the 2nd paragraph is changed to read: Crossover Switches, other than individually controlled crossover switches with control operator's permission, must not be unlocked or lined for crossover movement when another movement is approaching or passing over either switch.

5. Trackside Warning Detectors (TWD)

A. Protecting bridges, tunnels or other structures
MP 10.1—Recall Code 528

MP 18.5-Recall Code 518 DED-NWD only

B. Other TWD locations

MP 5.2X—Recall Code 407

MP 15.1X—DED Exception Reporting

MP 20.8X—DED Exception Reporting

MP 26.4X—Recall Code 428

MP 31.4X—DED Exception Reporting

MP 35.2X—DED Exception Reporting

MP 18.5—Recall Code 518 DED—SWD only

MP 30.0—Recall Code 268

MP 57.9—Recall Code 468

MP 87.4—Recall Code 258

MP 113.5—Recall Code 298

6. FRA Excepted Track

In Seattle, 7th Avenue Yard Zone 14 and Shoreline Lead Zone 15. Stacy 2nd Ave. and Occidental Lead 11, excluding tracks 1101, 1102, and 1111.

Zone 11-tracks 1160 through 1165

Zone 16-tracks 1610 through 1618

Zone 21-all tracks

In Tacoma, Tracks 320, 613, 614, and 720.

In Kent, Zone 62 and all industry tracks within limits of Zone 62. At Auburn, tracks 2405, 2417, 2418, 2451, 2452, 2454, and 2459.

Rye and Rye Jct.

Lakeview Spur, MP 11.0X to MP 0.0X South Tacoma MP 3.0 to Roy MP 21.0 At Glacier Park, All industrial tracks in zones 63, 64 and 65.

7. Special Conditions

Between Seattle and Tacoma—All employees must be familiar with the current Sounder Commuter and Amtrak schedules as found in Division General Notice, enabling compliance with the Item 4 amendment to GCOR Rule 6.32.6, Blocking Public Crossings.

Grade Crossing Ordinances—Seattle city ordinance prohibits use of the locomotive whistle along Alaskan Way from Vine Street to Broad Street and at Galer Street, except if necessary to prevent an accident. The bell must be rung continuously at these locations. On grade crossings not equipped with gates, a crew member other than the engineer will be positioned on the locomotive or car, or flagging from the ground to look out for and give warning to the public of the approaching locomotive or cars when:

- •The controlling cab end of the locomotive is not on theforward end of a movement approaching a crossing, or
- Conditions exist due to weather, traffic, structures or other circumstances which impair the engineer's ability to see approaching traffic or the traffic to see the locomotive or cars.

Kent—City ordinance prohibits switching operations over East Valley Highway (MP 14.1X) near 212th Street between 0630 and 0900 and between 1500 and 1800, the storage of cars, the stopping of cars during switching operations, the use of this crossing in such a manner as to unreasonably interfere with vehicular travel.

Kent Industrial Lead—Each train must stop before entering the crossing and permit a crew member to dismount to flag highway traffic to a stop. The locomotive may then proceed through the crossing, and the flagging crew member may reboard the locomotive before the remainder of the train proceeds through the crossing.

MP 14.1X (212th Street) MP 15.1X (228th Street)

Auburn—Setting out of loaded grain and coal trains should be made by pulling through yard tracks whenever possible. All reverse movements, north to south, at north end of yard must be made in as low a throttle position as possible to make movement. High lateral forces resulting from high throttle positions must be avoided in order to minimize the potential of derailment.

Permission in Tacoma Main Yard—Before an engine or engine with cars enters a track in Tacoma Main Yard, tracks 101 through 124, a crew member must ascertain from the tower yardmaster if there is or will be, any switching activity from the opposite end of the track. When there is a movement to be made in a common track, the tower yardmaster must inform both crews that the track is being used jointly, and that communication between both crews must be established prior to its use.

A switch crew or train crew employee will be required to lock both ends of the track while coupling air hoses and/or performing air tests on their train. Switch locks have been installed at both ends of Tracks 101 through 124 in the Tacoma Main Yard. The conductor or foreman may request the assistance of another qualified employee to assist in locking or unlocking the switches protecting his train.

Locomotive servicing personnel monitor Channel No. 87 and conduct operations on Channel No. 84.

Tacoma—Switching movements along or over public crossings must be preceded by flagmen who are required to give proper warning for safety of persons approaching crossing, except when locomotive is equipped with flashing amber light and precedes other units of train, or when crossing is protected by automatic crossing signals in operation.

During switching operations when visibility is restricted due to weather, flagmen must use lighted fusee at grade crossing not protected by flashing lights, bell signals or traffic signals, and at the following specific intersections:

- 1. East 11th and Canal Streets
- 2. East 11th Street and St. Paul Lumber Mill
- 3. Puyallup Avenue and East K Street
- 4. Lincoln and Milwaukee Avenues

Except for through trains in motion, trains or switching movements are not permitted to block the following crossings for in excess of 4 consecutive minutes:

- Canal Street 8. Wilkeson Street 2. Lincoln Avenue 9. East D Street McCarver Street 10. East 11th Street 4. McKinley Avenue 11. East 15th Street 12. South 56th Street 5. Pine Street Puyallup Avenue 13. South 74th Street
- 7. St. Paul Avenue

When grade crossing is cleared in accordance with the above, waiting vehicles and pedestrians are to be allowed to cross before crossing is again occupied.

City ordinance prohibits switching operations over Puyallup Avenue and East 11th Street between 0630 and 0830 and between 1530 and 1800 except on Saturdays and Sundays and legal holidays, the storage of cars, the stopping of cars during switching operations, the use of this crossing in such a manner as to unreasonably interfere with vehicular travel.

Holgate Street Crossing—On 2nd Avenue yard tracks MP 0.9, each train must stop before entering the crossing and permit a crew member to dismount to flag highway traffic to a stop. The locomotive may then proceed through the crossing, and the flagging crew member may re-board the locomotive before the remainder of the train proceeds through the crossing.

West Tacoma—Normal position of switch leading from set out track to Boise Cascade Paper tracks is for paper tracks and must be left in this position to serve as derail.

Steilacoom—Northward trains that will not clear Bridge 14, do not depart Union Avenue (MP 15.72) at Steilacoom before contacting Dispatcher to determine if train will be able to proceed at Pioneer.

Between Lakeview and Fort Lewis—Each train must stop before entering the following crossing and permit a crew member to dismount to flag highway traffic to a stop. The locomotive may then proceed through the crossing and the flagging crew member may re-board the locomotive before the remainder of the train proceeds through the crossing.

Fort Lewis—On cantonment tracks, when backing or pushing cars ahead of the engine over street crossings, the movement must be protected by a flagman on the ground. Many government warehouses, semi-portable loading ramps, and other structures have less than standard side clearance, and employees working along these tracks will be governed accordingly.

Mobase—Permanent drainage ditch—about 3 feet deep and 1700 feet long—in place between main track leading into cantonment and first track south, does not allow room to walk between these tracks. Gate into Mount Rainier Ordnance Depot will be kept locked at all times with switch lock.

Between Mobase and Roy—The U.S. Army has gun emplacements in the area east of the track that direct fire over the main track. When firing is in progress, Army guards will be stationed at the following locations:

MP 15.2 MP 17.6 MP 17.0 MP 19.8

On the approach of a train or track car, guards will immediately arrange for the firing to cease and allow the train and/or track car to pass through normally.

Centralia and Vader—Trains setting out on Main 2 sidings make cut opposite the CTC Bungalow. At Vader, spot cars a sufficient distance from dual control switches to prevent interference with hand operation of switches.

Fixed derails located at the south end of Main 2 siding at Centralia

Castle Rock—When setting out engines or cars, do not place closer than 500 feet to stub track switch at north end of siding.

Ostrander Tunnel 3—Cars with Card Kind Code M3E are only to move on Main 1, due to substandard clearances for these cars on Main 2.

Longview Jct—When operating/switching cars on the Controlled Siding, Track 1000, all cars being handled will have air hoses laced and air cut in on all cars. All shoving movements on this track will be protected by crew member preceding the movement under the provisions of GCOR Rule 6.5

Longview Jct. Yard—Before trains or maintenance of way equipment enters or fouls the yard at Longview Jct., crew member of trains or employee in charge of maintenance of way equipment must contact Yardmaster for permission to enter the yard. Crew member of trains must also report departure time of their train to the Yardmaster and maintenance of way employee must report to the Yardmaster when clear of tracks.

MP 105.9—Inside switch from Main 1 into Track 941, North End Main 1 Extension, close clearance when throwing switch when cars are occupying Peavey outside East Track.

Kalama—When switching Peavey Loop tracks, no more than 55 cars may be shoved at one time. Unit Grain trains destined for Kalama Export that have DP locomotives must not operate into this facility in DP status. Locomotives must be on the head end of the train to deliver the entire train, or the train must be divided and spotted in cuts with the head end portion of the train.

Woodland—MP 116.8 two new tracks have been installed, designated as Track 833 (East Track) and Track 834 (West Track) to service Columbia River Carbonates. Tracks are located off lead into Northwest Pet Foods and are protected by derail.

Rye Jct.—Highway grade crossing signal at NW Fruit Valley Road on LINC main track, MP 0.1, has been changed to an "island only" activation. Each end of track circuit is identified by yellow paint on rail. Train and engine movements from either direction must stop with leading wheels shunting track circuits at stop signs. Movement may proceed after signals have activated and gates are fully lowered.

Vancouver—All southbound trains except Amtrak must obtain permission from the Vancouver Terminal Dispatcher before proceeding south of MP 129.0. After contacting the Vancouver Terminal Dispatcher, trains must switch back to channel 66 until clearing Centralia South territory. All northbound trains must switch to radio channel 66 after passing Vancouver Jct.

Remote Control Operations—Signs located at MP 7.0 (Scenic Subdivision) and MP 10.0X (Seattle Subdivision) designate the Remote Control Area at Seattle Terminal (Interbay, Stacy Street and South Seattle).

Signs located at MP 38.2X and MP 3.0 (Seattle Subdivision) designate the Remote Control Area at Tacoma.

Railroad Crossings Not Indicated at Station Seattle

Atlantic Street UP Duwamish Avenue UP North Leg of Wye

West Seattle Line: East Marginal Way, joint track crossing UP

01

Between Reservation and East 15th Street—UP Running track to Muni Yard—UP

Amtrak Operations—NRPC trains must not use the following sidings without permission from the roadmaster for that territory, and inspection must be made by the Track Department prior to use: Centralia, Vader, Kelso, Longview Jct. and Ridgefield.

Automatic Equipment Identification (AEI)—Located at:

Seattle MP 9.5X (near Renton Jct.) Tacoma MP 35.2X (near Stewart)

Tacoma MP 5.1 (near Ruston)

Centralia MP 52.5

Kelso MP 96.5

Vancouver MP 134.0

Antennas have been installed between the main tracks at a height of 30 inches above the rails at these locations. Close clearance exists.

Close Clearance—Close clearances may exist on all auxiliary tracks.

The fence next to South Tacoma Siding will not clear a man on the side of a car.

The following switching procedures will apply on tracks identified to have track centers of 13 feet or less: When working around areas that have been identified as having close clearances, all movements are to be stopped before fouling those areas and all crew members accounted for before completing the switching move. Riding the side of a cars is prohibited unless the adjacent track is known to be clear. It is the responsibility of each crew member to review close clearance locations within their area of work prior to the start of the work process.

The following tracks have been identified as having track centers of 13 feet or less:

At Tacoma:

Between tracks 1110 and 1111

At Centralia:

Between tracks 3395 and 3201

Between tracks 3201 and 3202

Between tracks 3202 and 3203

Between tracks 3203 and 3204

Between tracks 3204 and 3205 Between tracks 3301 and 3302

Between tracks 3302 and 3303

Train Inspections—A member of the inbound crew on a through train will give the outbound train a roll-by inspection and advise the outbound crew of the condition of the train, unless the outbound crew will not be immediately available or the inbound crew is otherwise relieved of duties.

Critical Areas—Locations identified as "Critical Areas" (See System Special Instruction 33, Flash Flood Warnings).

 MP 17.7X—Bridge
 MP 24.3X—Bridge

 MP 29.4X—Bridge
 MP 34.1X—Bridge

 MP 5.2 to MP 5.7
 MP 7.3 to MP 8.2

 MP 15.0 to MP 19.0
 MP 21.0 to MP 23.0

 MP 24.3 to MP 25.5
 MP 36.1—Bridge

Dimensional Shipments—Any dimensional and/or oversize car or special shipment measuring 12 feet or wider must not meet, pass, or be passed by another dimensional shipment measuring 12 feet or wider on adjacent track between Seattle and Vancouver.

Identifying Signals—In signaled territory, when a train is passing a signal displaying other than "Clear" in advance of a control point, a crew member must transmit the following by radio:

Train Identification (Initials, Engine Number and Direction) Signal Name - In advance of (Control Point Location), on (Track) at (Speed) MPH.

Example of transmission:

MP 47.0 to MP 48.2

"BNSF 6301 South approach medium in advance of Napavine South on Main 1 at 50 MPH (on single track main track designation is not necessary).

Exception: Due to radio congestion, transmission will not be made between MP 120.9 southward approach Ridgefield South and MP 136.5 and between MP 5.1 Ruston and MP 0.0X Seattle.

Locations Approved for Active Drop Movements

System Transfer—5th Ave. Seattle
Pacific Coast—2nd Ave. Seattle
Sea Freeze—W. Seattle, Iowa Ave.
Davis Wire—Orillia
Continental Mills—Orillia
Americold—Orillia
Evans Black—Orillia
Merlino's—Orillia
Orillia Yard

Locations Having Individually Controlled Crossover Switches

CP Tukwila **CP** Sumner Spokane Street Lucile Glacier Park Stewart Orillia Clear Creek Argo Willis TR Jct. Bailey Georgetown Auburn North Reservation Rhodes Auburn Yard Bay Street Boeing Pacific Harbor

Black R iver (3)

Test Mile Locations:

Seattle to Tacoma:
MP 16.0X to MP 17.0X
MP 24.0X to MP 25.0X
MP 31.0X to MP 32.0X
MP 17.0 to MP 18.0
MP 39.0 to MP 40.0
MP 79.0 to MP 80.0
MP 112.0 to MP 113.0
MP 125.0 to MP 126.0

8. Line Segments Yard Line Segments


-		
Segment	Yard	Limits
400	S. Tacoma to Roy	MP 3.0 to MP 21.0
401	Lakeview to Nisqual	ly MP 11.5X to MP 0.0X
402	Saint Clair to Quadlo	ok MP 0.0 to MP 3.1
402	Olympia to Belmore	MP 9.1 to MP 15.8
438	Vancouver Jct	Rye MP 0.0 to MP 3.7
606	Auburn Yard	
608	Tacoma	
609	Olympia	
611	Centralia	
612	Longview Jct	East of Bridge 0.59
613	Longview Yard	Bridge 0.59 to Longview
622	King Street	Duwamish Ave. to Royal
Brougham	Way, all tracks east	of Occidental Ave South.
North of R	oyal Brougham Way,	all depot tracks to South
Portal.		
623	Stacy Street	Galer St. to Argo
		Interlocking
	400	Segment Yard 400 S. Tacoma to Roy 401 Lakeview to Nisqual 402 Olympia to Belmore 438 Vancouver Jct 606 Auburn Yard 608 Tacoma 609 Olympia 611 Centralia 612 Longview Jct 613 Longview Yard 622 King Street Brougham Way, all tracks east North of Royal Brougham Way, Portal. 623 Stacy Street

Road Line Segments

Line Segment	Limits	Mileposts
430	. Seattle (S. Jackson St.)	0.0X to 3.3X
	Stacy St.—Argo (Via Colorado	Ave. Line)
51	. Seattle to 21st Street 0.0X	to MP 40.1X
52	. 21st Street to VancouverMP 0.0	to MP 136.5

9. Locations Not Shown as Stations

Name		Miles - Location	Capacity Cars	Switch Opens
16012	Thomas	1.6 west of Willis		
16047	Gravel Center	0.8 north of West Tacoma	30	North
16049	Steilacoom	1.2 south of West Tacoma	8	North
16051	Ketron	3.3 south of West Tacoma	20	South
67305	South Tacoma	4.5 west of 11th Street	12	Both
67308	Hull Hardwood	1.1 east of Lakeview	2	East
67309	Lakeview			
67311	McChord Field	1.7 west of Lakeview	Yard	West
67312	Metreco	2.9 west of Lakeview	25	East
67313	Mobase			
67314	Spanaway Spur	4.3 west of Lakeview	Conn	Both
67320	Roy			
67404	Camp Murray	4.4 west of Lakeview	15	East
67407	Fort Lewis	7.8 west of Lakeview		
67503	Quadlok	3.1 south of St. Clair		
67510	Olympia	7.2 south of East Olympia	Yard	Both
67512	Graystone Spur	9.9 south of East Olympia	8	South
67514	Ohm Spur	11.7 south of East Olympia		South
16077	Tenino	8.6 south of East Olympia	52	Both
16080	Bucoda	2.8 north of Wabash	65	Both
16097	Napavine	1.2 north of Napavine S	84	Both
16104	Winlock	5.7 north of Vader	41	Both
16120	Castle Rock	2.3 south of MP 85	68	Both
68104	Longview on Spur	1.5 from Longview Jct.	Yard	Both
16142	N. Pacific Grain Growers	1.5 south of Kalama	38	North
68152	Ampere on Spur	2.4 from Rye Jct.	20	North
68154	Rye on Spur	3.6 from Rye Jct.	57	Both

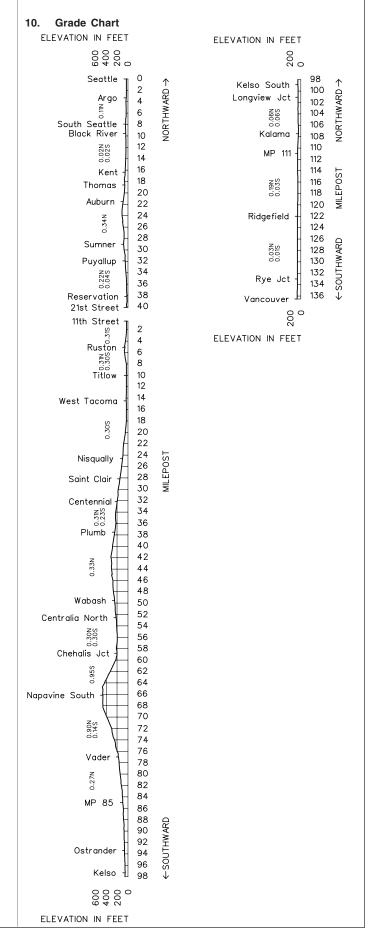

WESTWARD.	Length of Siding (Feet)	Station Nos.	Mile Post	Spokane Subdivision MAIN LINE STATIONS	Rule 4.3	Type of Oper.	Line Segment	Miles to Next Stn.	♠ EASTWARD
		01870	71.5 0.0	SPOKANE	BY	DT ABS	46	1.0	
		01877	1.1	SUNSET JCT.	JX(2)Y	ocs		0.8	
		01878	1481.6	LATAH JCT.	J		37	3.4	
	11,537	12005	370.3	OVERLOOK				4.2	
	4,027	12008	367.1	SCRIBNER	Х	CTC	47	2.0	
		12009	365.8	UP JCT.	J			0.5	
		63009	11.8	LAKESIDE JCT.	J			11.9	

Radio Channel No. 76 in service Spokane to UP Jct.

Radio Channel No. 70 in service UP Jct. to Lakeside Jct.

- 6	
	Radio Call-In
	Spokane 52(X)
	Emergency - Call 911
	Dispr X=0, Mechanical X=2, Field Support X=3, Warm Bearing X=5

Train Dispatcher Phone Numbers

(817) 234-1609, Fax (817) 234-1610

Speed Regulations

1(A). Speed-Maximum

	Freight
MP 0.0 to MP 11.8	60 MPH.

Exception: to System Special Instructions, Item 1, Speed Restrictions: Trains consisting entirely of loaded double stack equipment may operate at 60 MPH if not exceeding 105 TOB.

1(B). Speed—Permanent Restrictions

MP 71.5 to MP 1481.1	25 MPH.
MP 1481.1 to MP 375.0	30 MPH.
MP 375.0 to MP 374.8	25 MPH.
MP 368.8 to MP 365.8	55 MPH.

1(C). Speed—Switches and Turnouts

Through dual control turnouts at following locations: Turnouts at: Trains over 100 TOB must not exceed 25 MPH through turnouts shown to

1(D). Speed—Other

On sidings at following locations:

exceed that speed unless otherwise specified.

Overlook

Temperature Restrictions

All train speeds must be reduced 10 MPH below maximum posted speed (but in no case below 10 MPH) when ambient temperature exceeds 90 degrees Fahrenheit. Trains 100 TOB and over do not exceed 35 MPH.

See Item 1 of the System Special Instructions for additional speed restrictions.

2. **Bridge and Equipment Weight Restrictions** Maximum Gross Weight of Car

Spokane to Lakeside Jct. 143 tons, Restriction B

3. Type of Operation

CTC—in effect:

MP 1.1 to MP 11.8

ABS—in effect:

MP 71.5 to MP 1.1

Double Track—in effect:

MP 71.5 to MP 1.1

Yard Limits-in effect:

MP 71.5 to MP 1.1

Occupancy Control System—in effect:

MP 71.5 to MP 1.1

Before occupying the main track, trains or engines must receive one of the following permissions from the train dispatcher:

- Written OCS
- Proceed indication on a controlled signal
- Verbal Permission

See System Special Instructions rule 18.0 (OCS)

4. General Code of Operating Rules Items

Rule 6.19—When flagging is required, distance will be 2.5 miles.

Trackside Warning Detectors (TWD)

Protecting bridge, tunnel or other structures MP 0.8-DED, WWD only Flashing lunar (normal) Solid lunar or dark (dragging equipment exception)

MP 371.5—DED, EWD-Recall Code 538

B. Other TWD Locations

MP 371.5—DED, WWD—Recall Code 538

FRA Excepted Track

WWP off Main 2

Special Conditions 7.

Spokane—Within city limits, GCOR Rule 5.8 applies at all public crossings including Havanna Street.

Outbound train crews, for trains destined west via Wenatchee or Pasco, must have a record of ETD test as per ABTH Rules.

All trains and/or engines will get permission from the yardmaster before entering the yard or moving from a yard track. The yardmaster will communicate with any affected switch crew before authorizing the movement.

Application of Handbrakes on Grade-

Spokane Yard—Call Yardmaster for instructions. Erie Street—Call Yardmaster for instructions.

No other areas on the Spokane Subdivision exceed 1% grade.

Safety Lockout Program-Spokane—Switch locks are installed at Yardley at both ends of Tracks 1 through 16, Tracks 45 through 59, Crossovers 1, 59, 2, 2 to 1, and from the Main Track to 1 Track through the hand-throw switches (the Hard Way).

The conductor or foreman in charge must notify the yardmaster before locking out any track. Under the authority of the conductor or foreman in charge, the employee will be required to lock both ends of track while coupling air hoses, and/or performing air tests on their own train. This requirement will not apply to a conductor or foremen who is only coupling air hoses between their locomotive and the train or cars they will be handling.

The conductor or foreman may request the assistance of a switch or road crew operator at either end of their track to lock or unlock tracks for their protection.

Upon completion of coupling air hoses, and/or air testing, the conductor or foreman must notify the yardmaster when his crew is unlocking the track. It will not be necessary for the crew to remove locks at both ends of the track upon their departure.

Any yard or train crew member, upon discovery of a locked track in the yard, must call the yardmaster to get permission to remove the lock before switching any car into that track, to make sure track is clear of employees working on their train. Switch locks may not be removed without the authority of the yardmaster.

These procedures are a tool for your use to provide additional protection while in a specific track. They are not intended to supersede GCOR Rule 5.13, (Blue Flag Signal Protection of

Sunset Jct. and Latah Jct.-Westward freight trains do not use in excess of fourth throttle position west of Sunset Jct. until all units are on the Latah Creek Bridge.

Remote Control Operations-Signs located at MP 1.1, Spokane Subdivision and MP 65.08. Kootenai River Subdivision, designate the Remote Control Area at Yardley.

Dynamic Braking—In order to comply with minimum dynamic brake requirements for trains on the Hi Line. Stampede, and Scenic subdivisions, crews on such trains, before departing Seattle (Interbay), Tacoma, Havre, Sandpoint (if originating from MRL RR), Spokane (if train originates at Spokane), or Pasco (if train originates at Pasco), must:

- Inspect locomotive consist before departing locations outlined above and determine if any locomotives in consist have dynamic brakes cut out and/or are tagged defective. (Cut out traction motor(s) on DC locomotives results in inoperative dynamic brake). NOTE: Before cutting in a dynamic brake found cut out
 - but not tagged defective, contact Mechanical Help Desk and be governed by that supervisor's instruction.
- 2. If any locomotive in consist is found not to have an operative dynamic brake, immediately report this fact to local mechanical forces and Mechanical Help Desk.
- Any dynamic brake failure that occurs enroute thereafter must be reported to the Mechanical Help
- All relieving locomotive consist is not required if this information concerning dynamic brakes of consist is left on controlling locomotive.

Dynamic brake limitation is now at 28 axles per consist for all trains on the BNSF, per Air Brake & Train Handling Rule 103.2.1, Item B. When mechanical personnel makeup locomotive consist and/or perform daily inspection of locomotive consists:

- Where locomotive consists are make up by mechanical personnel, mechanical personnel will set up locomotive consist in compliance with 28-axle dynamic brake limitation (if more than 28 rated DB axles in consist) along with the other consist set up procedures for each locomotive in the consist.
- During that inspection, mechanical personnel note all defective dynamic brakes in consist when consist is initially made up and leave this information on controlling locomotive for the locomotive engineer.
- Local terminal operating supervision at Havre, Spokane and Seattle will communicate to mechanical personnel the minimum dynamic brake requirements for locomotive consist being built for trains requiring a minimum number of DB axles for the heavy grade territories.

Test Mile Location

MP 0.0 to MP 1.0

Identifying Signals-In signaled territory, when a train is passing a signal displaying other than "Clear" in advance of a control point, a crew member must transmit the following by

Train Identification (Initials, Engine Number and Direction) Signal Name - In advance of (Control Point Location), on (Track) at (Speed) MPH.

Example of transmission:

"BNSF 6301 South approach medium in advance of Napavine South on Main 1 at 50 MPH (on single track main track designation is not necessary).

Exception: Due to radio congestion, transmission will not be made between Spokane MP 0.0 and Latah Jct. MP 1481.6.

Line Segments

Yard Line Segments

Line Segment Limits

652 Spokane passenger tracks 5 & 6 and crossover to main track.

Road Line Segments


Line Segment Limits

46	Spokane to Sunset Jct.
37	Sunset Jct. to Latah Jct.
47	Latah Jct. to Lakeside Jct

Locations Not Shown as Stations

Name	Miles - Location	Capacity Cars	Switch Opens	
12010 Fish Lake	0.7 west of UP Jct.	Conn	East	

10. **Grade Chart**



WESTWARD. ◆	Length of Siding (Feet)	Station Nos.	Mile Post	Stampede Subdivision MAIN LINE STATIONS	Rule 4.3	Type of Oper.	Line Segment	Miles to Next Stn.	↑EASTWARD
	8,000	13126	127.0 0.0	ELLENSBURG	ВСР	CTC		17.2	
	8,200	13143	17.1	BRISTOL		СТС		7.7	
		13150	24.9	CLE ELUM		TWC		12.6	
		13163	38.1	EASTON	Т	2MT CTC		8.4	
		13172	46.3	MARTIN				2.4	
		13175	49.0	STAMPEDE		TWC	49	11.0	
	7,000	13185	59.7	LESTER	Т	стс	40	21.4	
		13206	81.3	PALMER JCT.	Т	TWC		1.2	
	9,300	13207	82.3	KANASKAT		стс		5.9	
		13213	88.2	RAVENSDALE		TWC		14.4	
			102.6	STAMPEDE WYE				0.3	
			102.9	RAINIER	JTP	СТС		102.9	

Radio Channel No. 76 in service.

Radio Call-In						
Auburn - 62(X)	Cle Elm - 51(X)	Kanaskat - 52(X)				
Stampede - 53(X)	Stampede Tunnel - 48(X) Ellensburg - 80					
Easton - 61(X)	n - 61(X) Emergency - Call 911					
Dispr X=0, Mechanical X=2, Field Support X=3, Warm Bearing X=5						

Train Dispatcher Telephone Number—8-234-1607

Speed Regulations

1(A). Speed—Maximum

	Freignt
MP 0.0 to MP 102.9	. 49 MPH.

1(B). Speed—Permanent Restrictions

•	opeca i cimanent ricotrictione	
	MP 127.0 to MP 1.3	. 35 MPH.
	MP 1.3 to MP 10.9	. 45 MPH.
	MP 10.9 to MP 12.8	. 25 MPH.
	MP 12.8 to MP 14.3	. 35 MPH.
	MP 14.3 to MP 18.8	. 45 MPH.
	MP 18.8 to MP 30.1	. 49 MPH.
	MP 30.1 to MP 31.4	. 40 MPH.
	MP 31.4 to MP 36.9	. 49 MPH.
	MP 36.9 to MP 39.3—Main 1	. 40 MPH.
	MP 39.3 to MP 41.1—Main 1	. 20 MPH.
	MP 36.9 to MP 38.0—Main 2	
	MP 38.0 to MP 41.1—Main 2	. 20 MPH.
	MP 39.3 to MP 57.6	. 20 MPH.
	MP 57.6 to MP 63.7	. 35 MPH.
	MP 63.7 to MP 67.3	. 30 MPH.
	MP 67.3 to MP 70.7	. 25 MPH.
	MP 70.7 to MP 84.9	
	MP 84.9 to MP 95.6	
	MP 95.6 to MP 98.4	. 35 MPH.
	MP 98.4 to MP 101.0	. 30 MPH.
	MP 101.0 to MP 101.8	. 25 MPH.
	MP 101.8 to MP 102.9	. 20 MPH.

1(C). Speed—Switches and Turnouts

Speed switches and turnouts through dual control turnouts at the following locations:

Ellensburg, Bristol, E. Easton, Lester, and Kanaskat	30 MPH.
W. Easton	20 MPH.
Stampede Wye	10 MPH.
Rainier	20 MPH

Trains over 100 TOB must not exceed 25 MPH through turnouts shown to exceed that speed.

1(D). Speed-Other

Sidings at Ellensburg, Bristol, Lester, and Kanaskat	30 MPH.
Trains 143 TOB and greater on descending grade	
Westbound MP 47.0 to MP 59.0	15 MPH.

	Freignt
Eastbound MP 47.0 to MP 41.0	15 MPH.
MP 49 to MP 50, In Tunnel No. 4—Intermodal trains only	10 MPH.
Eastward intermodal trains passing over detector at MP 100.6	10 MPH.
All other tracks and sidings	10 MPH.

Item 1(A) of the System Special Instructions applies between West Switch Lester to Auburn and from Ellensburg to East Switch Easton.

See Item 1 of the System Special Instructions for additional speed restrictions.

Bridge and Equipment Weight Restrictions Maximum Gross Weight of Car

Ellensburg to Rainier 143 tons, Restriction B Palmer Jct. to Veazey 134 tons, Restriction G

Six-axle locomotives and six-axle derricks not permitted on the following tracks:

Ellensburg yard tracks, back track off Thorp siding and back track off Cle Elum siding.

Loaded unit trains are not permitted on the following auxiliary tracks:

Ellensburg siding extension, Thorp, Cle Elum, Ravensdale, and Covington. Ravensdale may be used for unit trains while loading only.

Type of Operation

CTC-in effect:

MP 0.0 to MP 1.8

MP 16.3 to MP 17.8

MP 36.9 to MP 41.1

MP 59.0 to MP 60.5

MP 81.9 to MP 83.8

MP 102.6 to MP 102.9

Multiple Main Tracks-in effect: **2 MT**

MP 36.9 to MP 41.1

TWC-in effect:

MP 1.8 to MP 16.3

MP 17.8 to MP 36.9

MP 41.1 to MP 59.0

MP 60.5 to MP 81.9

MP 83.8 to MP 102.6

General Code of Operating Rules Items

Rule 6.19—When flagging is required, distance will be 2.0 miles.

Rule 6.32.2(E) Power Off Indicators—in effect.

Trackside Warning Detectors (TWD)

A. Protecting bridges, tunnels, or other structures MP 43.5—DED—(WWD only)—Recall Code 618 MP 52.0—DED—(EWD only)—Recall Code 537 MP 100.6—(EWD only)—Recall Code 628

B. Other TWD locations

MP 9.2—DED/Exception Reporting

MP 13.9—DED/Exception Reporting

MP 20.5—Recall Code 518

MP 36.9—Recall Code 617

MP 43.5—DED—(EWD only)—Recall Code 618

MP 46.0—DED/Exception Reporting

MP 49.0—DED/Exception Reporting

MP 52.0—DED—(WWD only)—Recall Code 537

Mp 58.3—DED/Exception Reporting

MP 59.0—DED/Exception Reporting

MP 62.9—Recall Code 538

MP 66.8—DED/Exception Reporting

MP 71.6—DED/Exception Reporting

MP 77.8—DED/Exception Reporting

MP 81.4—DED/Exception Reporting MP 86.3—DED/Exception Reporting MP 91.6—Recall Code 528

MP 100.6—(WWD only)—Recall Code 628

At detector MP 100.6, crews on eastbound trains will inspect and set out the oversize car in the event that a warning sounds. The oversize car will be set out on the house track at Kanaskat to be picked up by next available westbound train. This information is to be given to the dispatcher upon setout.

6. FRA Excepted Track

Palmer Jct. to Veazey—MP 0.6 to MP 6.9 Ellensburg Yard, all tracks greater than 30 feet from main siding Cle Elum Yard, except siding

7. Special Conditions

Auburn and Ellensburg—Train Inspections—A member of inbound crews on through trains operating cabooseless will give the outbound train a roll-by inspection and advise the outbound crew of the condition of the train, unless the outbound crew will not be immediately available or the inbound crew is otherwise relieved of duties.

On the sidings at Cle Elum (Oakes Street MP 24.9 and So. Cle Elum Street MP 25.4), Ravensdale MP 91.5, Covington MP 94.7, and Auburn (R Street MP 101.5 and M Street MP 101.9), trains must stop at signs and ensure lights are flashing a minimum of 20 seconds and gates fully lowered before proceeding over the crossings.

Cle Elum - Easton—Between Cle Elum and Easton, the actual distance between MP 28 and MP 29 is 2.473 feet.

Easton—Track 3202, the stub track, is used for snow plow storage and otherwise out of service. Call the Roadmaster at 206-628-6880 for access to the track.

Palmer Jct.—Track 3631, the west leg of the wye to the Veazy Spur, MP 1.8 to MP 6.2, is not in service for train movement without a prior track inspection. For access, the Tacoma Terminal will call the Roadmaster at 206-625-6880 at least 24 hours prior to the planned movement to confirm an inspection and a delivery time.

Close Clearance—May exist on all auxiliary tracks.

Mountain Grade Special Conditions

Between Easton and Lester—Trains handling cars exceeding Plate E are not permitted except trains handling doublestack equipment may operate if equipment is bare table or with containers in bottom well only. Containers are restricted to single level loading only. Trains handling loaded TOFC cars must not exceed 10 MPH through Tunnel 4 between MP 49.0 and MP 50.0.

Mountain Grade Operation—Air Brake and Train Handling Rules for mountain grade operations apply on mountain grade between Lester and Stampede, ruling grade ascending east 2.2, and between Martin and Easton—ruling grade descending east 2.2.

The maximum number of powered axles in head end consist ascending mountain grade must not exceed 36.

The speed of trains must be controlled, at least in part, with automatic air brake when train tonnage exceeds 3,500 tons when operating on descending grades, MP 41.0 to MP 58.5.

ABTH Rule 102.12.6—the following exception applies: H EVEPAS symbolled train are exempt from the formula for the position requirements above and the following will apply: DP/Helper consists must ne cut in not less than one half the rated tonnage, nor more than the full rated tonnage of the consist.

Requirements for Helper/Distributed Power Trains-

Unless otherwise instructed, helpers and distributed power remote locomotive consists utilized on the Stampede Subdivision must be cut in at not less than one half the rated tonnage, nor more than the full rated tonnage, of the helper/DP consist. Helper/DP remote placement should be as close to one-half rated tonnage as train makeup guidelines below allow.

Locomotive Ratings to be Utilized for Helper Placement Only—DC Locomotives

1500-2999 hp = 1000 tons 3000-3999 hp = 1500 tons 4000 hp + = 2000 tons AC Locomotives = 2500 tons

limitations on the Stampede Subdivision:

Train Size/Coupler Capacity Limitations Between Easton and Lester—For the purpose of identifying coupler capacity

Grade C equipment (General Service) is rated at 4,800 tons Grade E equipment is rated at 6,000 tons

Doublestack equipment and Boeing cars will be considered to be equipped with Grade E equipment for the purpose of coupler capacity limitations. All other car types will be considered Grade C equipment in the application of the following instructions.

If it is not known that a car is equipped with high strength couplers, it can be determined by looking at the coupler casting identification located on top of the coupler. A high strength coupler will have the letter "E" as the LAST character of identification. Examples of high strength coupler identifications are E60THE, SBE60CE, and E60DE. NOTE: The term "helpers", in instructions below applies to both manned helper and distributed power remote locomotive consists. All length limitations exclude locomotives.

Train Length/Coupler Capacity Limitation Without Helpers—Grade C Equipment - 4,800 tons, 7,000 feet All Grade E Equipment or Mixed Grade C and E - 6,000 tons,

7,000 feet (All Grade C equipment must be placed so that it has no more than 4,800 trailing tons.)

Exception: Westward loaded unit grain trains tonnage limit is 7500 tons with all Grade E equipment.

Train Length/Coupler Capacity Limitation With Helpers—9,600 tons and 7,700 feet

Exception: 7,700 feet limitation does not apply to Distributed Power trains.

NOTE: Coupler capacity limits above for non-helper trains apply to trailing tonnage behind helper placement.

Survivair SCBA System—Employees in train operations must have received training on the operation of the Survivair SCBA System prior to operating/working trains through the Stampede Tunnel

Survivair SCBA Equipment must be checked out by qualified crew members of trains running through the Stampede Tunnel, at check out locations at Balmer Yard, Tacoma or Ellensburg before leaving, and must be immediately accessible while in the Stampede Tunnel.

Stampede Tunnel Emergency Action Plan

- Consider hazardous material involvement in each situation before any action taken.
- 2. Consider direction of train and tunnel air movements.
- If a train incident occurs requiring crew members to leave the locomotive cab to inspect their train, crew members must put on SCBA unit before investigating the problem(s). Hood must be worn with air activated if a crew member experiences breathing discomfort.

- If an emergency condition exists, such as a release of hazardous material, use of Survivair SCBA is required.
- If distance or situation warrants, walk out if necessary. Replacement air cylinders are located in each bay.

Event	Action
I. Undesired Emergency Air Brake Application, Break-in-two or Derailment	If any hazardous material is within tunnel, use breathing equipment immediately. After PCS (power cutoff switch) has reset on the lead locomotive, if air does not begin to restore within two minutes, observe the following: 1. If there is reasonable suspicion that a derailment has occurred, cut off locomotives if possible, if not, walk-exit the tunnel. Obtain supplemental breathing equipment as needed. 2. Use breathing equipment, evaluate, secure, and/or repair if possible. Obtain supplemental breathing equipment as needed.
II. Fire (Obvious)	Advise dispatcher and use breathing equipment. Cut off power, leave train angle cock open, exit tunnel. Do not return to tunnel.
III. Engine(s) derailed	Advise dispatcher and use breathing equipment. Shut down and secure derailed and all trailing locomotive units. If lead locomotive is not derailed, cut off for exit. Exit tunnel using lead locomotive, or if lead is derailed, walk out of tunnel.

Stampede Tunnel—All bays are 9' wide x 7.5' deep.

Location	Phones, Air Hose, Wrench & Knuckles Type E & F	SCBA Emergency Replacement Cylinders	Side of Tunnel	Distance Between Bays in Feet
Easton Station	Х			
East Portal				0
Bay 1		XXXXX	South	2,580
Bay 2		XXXXX	North	2,630
Bay 3		XXXXX	South	4,780
Bay 4		XXXXX	North	4,965
Bay 5		XXXXX	South	7,325
Bay 6		XXXXX	North	7,440
West Portal				9,832
Lester Station	Х			

The conductor will make a wire report to the Division General Manager, the General Foreman Cars, the Trainmaster, and the Road Foreman at Everett of all materials used and where they were taken from. This report must state where the material was left if it was not returned to the bay it was taken from.

Automatic Equipment Identification (AEI)—Located at: E. Auburn-MP 100.6

Flash Flood Warnings-Refer to Item 33, System Special Instructions. The following locations on this subdivision have been identified as "critical areas" and are limited to restricted speed.

MP 0.0 to MP 4.1

MP 6.1—Bridge

MP 10.0—Bridge

MP 32.6 to MP 34.5

MP 48.5—Bridge MP 56.3—Bridge

MP 19.0—Bridge

MP 58.3—Bridge MP 60.5 MP 64.9 to MP 67.6 MP 72.0 to MP 78.0 MP 81.5—Bridge MP 98.7

MP 100.2—Bridge

Minimum Dynamic Brake Requirements—Before descending grades described in the chart, it must be known that locomotive consist(s) has the minimum number of operative axles of dynamic brake. If train does not meet the minimum requirements as outlined, train must not proceed. For the purpose of this rule, the weight of locomotives with inoperative dynamic brakes is to be included in train's total trailing tonnage.

Minimum Dynamic Brake Requirements for Freight Trains Westward, MP 47.0 to MP 59.0 Eastward, MP 47.0 to MP 41.0

On the descending grade locations stated above, total brake pipe reduction to control speed should never exceed 15. If total brake pipe reduction exceeds this value as outlined, train must be stopped immediately.

	TOB	TOB	TOB	TOB	TOB	TOB	TOB
Total Trailing Train	85	86	96	106	116	126	136
Tonnage	or	to	to	to	to	to	to
	less	95	105	115	125	135	145
2,000 or less	4	4	4	4	6	6	8
2,001 to 3,000	6	6	6	6	8	8	10
3,001 to 4,000	8	8	8	8	10	10	12
4,001 to 5,000	8	8	10	10	12	12	14
5,001 to 6,000	12	12	12	12	14	14	16
6,001 to 7,000	12	12	12	14	16	16	18
7,001 to 8,000	12	12	12	14	16	16	20
8,001 to 9,000	12	12	14	16	18	20	22
9,001 to 10,000	12	12	14	18	20	22	24
10,001 to 11,000	12	12	14	18	22	24	28
11,001 to 12,000	12	12	16	20	24	26	30
12,001 to 13,000	12	12	18	22	26	28	32
13,001 to 14,000	12	12	18	24	28	30	34
14,001 to 15,000	12	14	20	26	30	32	36
15,001 to 16,000	12	14	20	26	30	34	38
16,001 to 17,000	14	16	22	28	32	36	40
17,001 to 18,000	16	18	24	30	34	38	44

Identifying Signals-In signaled territory, when a train is passing a signal displaying other than "Clear" in advance of a control point, a crew member must transmit the following by

Train Identification (Initials, Engine Number and Direction) Signal Name - In advance of (Control Point Location), on (Track) at (Speed) MPH.

Example of transmission:

"BNSF 6301 South approach medium in advance of Napavine South on Main 1 at 50 MPH (on single track main track designation is not necessary).

Test Mile Locations

MP 8 to MP 9

MP 101 to MP 102

64 NORTHWEST DIV.—No. 3—April 26, 2006—Stampede Subdivision

Walkway Removed from Following Bridges

MP 58.4

MP 58.9

MP 60.5

MP 67.7

8. Line Segments

49—Ellensburg to Rainier—MP 0.0 to MP 102.9 411—Palmer Jct. to Veazey—MP 0.6 to MP 6.9


9. Locations Not Shown as Stations

Name	Miles - Location	Capacity Cars	Switch Opens
13133 Thorp	7.6 west of Ellensburg	22	East
13154 Bullfrog	4.1 west of Cle Elum	1	Both
13220 Covington	6.9 west of Ravensdale	113	Both
13228 East Auburn	14.3 west of Ravensdale	87	Both

10. Grade Chart

ELEVATION IN FEET

2800 2600 2400 2200 2200 1800 1400 1200 1000 800 600 400

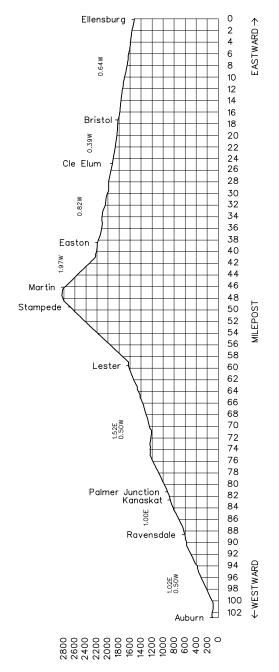

ELEVATION IN FEET

SOUTHWARD	Length of Siding (Feet)		Mile Post	Sumas Subdivision BRANCH LINE STATIONS	Rule 4.3	Type of Oper.	Line Segment	Miles to Next Stn.	↑ NORTHWAR
+		66089	127.2	SUMAS	В	Rule 6.28		6.4	P
		66083	120.9	NOOKSACK				9.4	
		66073	111.4	DEMING			403	7.9	
		66065	103.5	ACME		TWO		9.5	
		66054	94.1	THORNWOOD		TWC		7.3	
		66305	86.8 21.3	SEDRO WOOLLEY				4.8	
		15042	16.6	BURLINGTON	J		409	45.3	

Radio Channel No. 76 in service.

Radio Call-In				
Everett - 37(X) Burlington - 38(X) Bellingham - 39(X)				
Blaine - 41(X)				
Emergency - Call 911				
Dispr X=0, Mechanical X=2, Field Support X=3, Warm Bearing X=5				

Train Dispatcher Telephone Number—(817) 234-1607

1. Speed Regulations

1(A). Speed—Maximum

		Freight
MP 127.2 to MP	16.6	40 MPH.

1(B). Speed—Permanent Restrictions

10 MPH.
20 MPH.
5 MPH.
10 MPH.
25 MPH.
10 MPH.
10 MPH.
10 MPH.

1(C). Speed—Switches and Turnouts—None

1(D). Speed-Other

Item 1(A) of the System Special Instructions applies.

See Item 1 of the System Special Instructions for additional speed restrictions.

2. Bridge and Equipment Weight Restrictions Maximum Gross Weight of Car

Sumas to MP 2.0	143 tons, Restriction E
MP 2.0 to Lynden 1	131.5 tons, Restriction H
Sumas to Lawrence	143 tons, Restriction E
Lawrence to Sedro Woolley	. 134 tons, Restriction G
Sedro Woolley to Burlington	. 134 tons, Restriction G

Bridge 110—Cars under 38 feet long weighing between 88.5 tons and 110 tons and cars under 44 feet long weighing between 110 tons and 131.5 tons must be separated from each other by a car weighing less than 88.5 tons.

Six-axle locomotives heavier than 175 tons, four-axle locomotives heavier than 135 tons, and six-axle derricks are not permitted.

Sedro Woolley—Goodyear Nelson Hardware Lumber Co. Track—Locomotives not permitted beyond switch.

3. Type of Operation

TWC—in effect:

MP 124.0 to MP 16.6

4. General Code of Operating Rules Items

Rule 6.19—When flagging is required, distance will be 1.5 miles.

Rule 6.28—Rule 6.28 is in effect on the Lynden Spur, MP 0.0 to MP 11.3, and in Sumas from MP 127.2 to MP 124.0.

5. Trackside Warning Detectors (TWD)

A. Protecting bridges, tunnels or other structures: None

B. Other TWD locations

MP 20.9—DED

MP 88.4—DED

MP 108.6-DED

6. FRA Excepted Track

Sumas to Lynden—MP 1.0 to MP 11.3, all tracks Sedro Woolley—yard tracks

7. Special Conditions

Close Clearance—May exist on all auxiliary tracks.

Train Inspections—A member of the inbound crew on a through train operating cabooseless will give the outbound train a roll-by inspection and advise the outbound crew of the condition of the train, unless the outbound crew will not be immediately available or the inbound crew is otherwise relieved of duties.

Flash Flood Warnings—Refer to Item 33, System Special Instructions. The following locations on this subdivision have been identified as "critical areas" and are limited to restricted speed.

MP 86.0 to MP 96.8

MP 98.0—Bridge

MP 103.8 to MP 104.5

MP 110.0 to MP 111.0

Sedro Woolley—If westward trains cannot maintain a speed of 5 MPH in traversing the 14-degree curve at Sedro Woolley and power is used, it must be limited to no more than 3 throttle, maximum 300 amps. If the train tends to stall with the above power limits, the train must be allowed to stop.

No release of the automatic brakes should be attempted with the train stretched and moving through the 14-degree curve.

After stopping, release the automatic brakes and bunch slack at the same time that release is taking place.

After release and when slack is bunched, control forward speed with light independent brake applications, using the automatic brakes if necessary, keeping the train bunched with the independent brake to hold speed to 5 MPH until the train is off the 14-degree curve.

Ferry Street crossing in Sedro Woolley, MP 86.71, DO number 085095V is a stop and protect crossing.

Trains will stop at stop signs and confirm that crossing is activated and then proceed according to Rule 6.32.

Lynden—Before departing Sumas to switch Westfarm Foods, all crew members must review and brief on instructions for "Switching at Westfarm Foods" posted on bulletin board at Sumas.

66 NORTHWEST DIVISION—No. 3—April 26, 2006—Sumas Subdivision

8. Line Segments

Road Line Segments


Line Segment Limits	Mileposts
403—Sedro Woolley	. MP 86.8 to MP 85.8
399—Sumas—Hampton	MP 0.0 to MP 5.5
614—Hampton—Lynden	MP 5.5 to MP 11.3
403—Sumas—Sedro Woolley	MP 127.2 to MP 86.8
409—Sedro Woolley—Burlington	MP 21.3 to MP16.6

9. Locations Not Shown as Stations

Name		Miles - Location	Capacity Cars	Switch Opens
66060	Wickersham	4.9 south of Acme	Conn.	South
66077	Lawrence	4.2 north of Deming	6	South
66410	Lynden (on Spur)	11.3 west of Sumas	Yard	East

10. Grade Chart

ELEVATION IN FEET

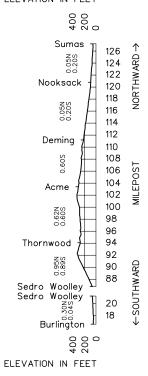

SOUTHWARD	Length of Siding (Feet)	Station Nos.	Mile Post	Woodinville Subdivision BRANCH LINE STATIONS	Rule 4.3	Type of Oper.	Line Segment	Miles to Next Stn.	↑ NORTHWAR
+		02159	1.2	SNOHOMISH JCT. WEST	JT	Rule		1.2	P
		65601	37.0	BROMART		6.28	403	7.4	
		65608	29.9	MALTBY To WOODINVILLE 5.5		TWC			
]
			0.1X	WOODINVILLE		TWC		18.3	
		65819	7.0X	REDMOND		TWC			
		65614	23.9	To MALTBY 5.5 WOODINVILLE	TU			7.1	
		65622	17.0	KIRKLAND				4.4	
		65626	12.7	BELLEVUE		TWC	405	0.8	
		65627	12.0	WILBURTON				7.3	
		65634	4.3	SCOPA				2.1	
		65637	2.2 12.0Z	RENTON		Rule 6.28	410	2.2	
		16004	9.5Z	RENTON JCT	J	0.20		50.8	

Radio Channel No. 87 in service Renton Jct. to Kirkland.

Radio Channel No. 60 in service between Maltby and Kirkland and between Bromart and Redmond.

Radio Call-In
Renton - 41(X)
Emergency - Call 911
Dispr X=0, Mechanical X=2, Field Support X=3, Warm Bearing X=5

MP 4.3 to MP 23.9 30 MPH. 25 MPH.

MP 23.9 to MP 37.0 25 MPH. 25 MPH.

Passenger

Freight

Train Dispatcher Telephone Number—8-234-1623

1. Speed Regulations

1(A). Speed—Maximum

	MP 0.1X to MP 7.0X	25 MPH 10 MPH.
1(B).	Speed—Permanent Restrictions	
	MP 9.5Z to MP 12.4Z	10 MPH 10 MPH.
	MP 2.2 to MP 4.3	10 MPH 10 MPH.
	MP 4.3 to MP 7.4	
	MP 7.4 to MP 7.5	
	MP 7.5 to MP 8.9	25 MPH 25 MPH.
	MP 11.5 to MP 11.7	10 MPH 10 MPH.
	MP 11.7 to MP 12.9	25 MPH 25 MPH.
	MP 14.3 to MP 17.7	25 MPH 25 MPH.
	MP 18.8 to MP 19.7	25 MPH 25 MPH.
	MP 19.7 to MP 19.8	10 MPH 10 MPH.
	MP 19.8 to MP 22.4	25 MPH 25 MPH.
	MP 23.7 to MP 25.2	10 MPH 10 MPH.
	MP 37.0 to MP 37.6	10 MPH 10 MPH.
	MP 0.0 to MP 1.2	10 MPH 10 MPH.
	MP 1.7X to MP 7.3X	10 MPH 10 MPH.

1(C). Speed—Switches and Turnouts—None

1(D). Speed-Other

On sidings	10 MPH 10 MPH.
MP 19.7 to MP 19.8, over 124th Street and	
124th Avenue crossings (HER)	10 MPH 10 MPH.
Bridge 11.5Z, cars heaver than 134 tons	10 MPH 10 MPH.
Bridge 9.1, cars heaver than 134 tons	10 MPH 10 MPH.
Bridge 11.5, cars heaver than 134 tons	10 MPH 10 MPH.
Bridge 23.9, cars heaver than 134 tons	10 MPH 10 MPH.
Bridge 24.51, cars heaver than 134 tons	10 MPH 10 MPH.
Bridge 34.3, cars over 134 tons	10 MPH 10 MPH.

	Passenger	Freight
Bridge 38 between Snohomish Jct. West		
and Snohomish:		
Six-axle locomotives heavier than 175 tons .	10 MPH	10 MPH.
At Renton on Boeing Spur over Conlon		
Crossing (HER)	5 MPH	. 5 MPH.

Item 1(A) of the System Special Instructions applies, except between MP 25.0 (Woodinville) and MP 37.0 (Bromart).

See Item 1 of the System Special Instructions for additional speed restrictions.

2. Bridge and Equipment Weight Restrictions Maximum Gross Weight of Car

Snohomish Jct. West to Woodinville	143	tons,	Restriction	D
Woodinville to Renton Jct	134	tons,	Restriction	D
Bromart to Snohomish	134	tons,	Restriction	G
Woodinville to Issaquah Line:				

Woodinville to MP 7.3X 134 tons, Restriction G

Bridge 38 between Bromart and Snohomish—Six-axle derricks not permitted.

3. Type of Operation

TWC—in effect: MP 37.0 to MP 4.3 MP 0.1X to MP 7.3X

4. General Code of Operating Rules Items

Rule 6.19—When flagging is required, distance will be 1.0 mile.

Rule 6.28—Rule 6.28 is in effect from Snohomish Jct. West to Bromart, MP 1.2 to MP 37.0, and from Scopa to Renton Jct., MP 4.3 to MP 9.5Z.

5. Trackside Warning Detectors (TWD)—None

6. FRA Excepted Track

Black River Passing Track (4302)
Earlington Park
Bellevue Yard excluding tracks 5098 and 5097
Woodinville to Redmond MP 1.8X to MP 7.3X

7. Special Conditions

Bellevue—Do not leave cars between main track and gate at Safeway spur account descending track.

No switching is permitted on or across N.E. 8th between the hours of 0700 to 0900 and 1600 to 1800 except on Sundays and legal holidays.

No side clearance to doors 1 and 2 at Safeway Warehouse.

Wilburton Bridge—Walkway out of service—MP 11.57 to MP 11.7

Renton—The use of fusees within the fenced limits of the Renton Boeing Plant is prohibited.

Train Inspections—A member of the inbound crew on a through train operating cabooseless will give the outbound train a roll-by inspection and advise the outbound crew of the condition of the train, unless the outbound crew will not be immediately available or the inbound crew is otherwise relieved of duties

Close Clearance—May exist on all auxiliary tracks.

Flash Flood Warnings—Refer to Item 33, System Special Instructions. The following locations have been identified as "critical areas" and are limited to restricted speed.

MP 2.0 to MP 2.2

MP 21.0 to MP 23.5

MP 32.0 to MP 38.2

MP 9.0X to MP 9.6X

Test Mile Locations

MP 6.0 to MP 7.0

Derails—The 2 derails located between Airport Road Crossing and Snohomish Jct. West, may be left in the off position unless protecting cars, engines or equipment.

Derails at Snohomish Jct. West may be left in off position unless protecting cars, engines, or equipment.

Highway Grade Crossing Warning Systems—Each train must stop before entering the following crossings and permit a crew member to dismount to flag highway traffic to a stop. The locomotive may then proceed through the crossing, and the flagging crew member may reboard the locomotive before the remainder of the train proceeds through the crossing.

MP 13.1—Bellevue 128th Street

MP 0.1X to MP 7.0X—All crossings with automatic warning systems.

Locations Approved for Active Drop Movements

Rabanco-Renton Jct.

Dunn Lumber—Renton

Boeing—Boeing Siding

Locations Approved for Gravity Drop Movements

K&M Meats—Renton

Air Products—Renton

Safeway—Bellevue

Western Kraft-Bellevue

GTS/Coors—Kirkland

Boise Cascade—Maltby

Stop signs protecting railroad crossing at Woodinville on the Renton to Snohomish Jct. West main track have been removed. Stop signs protecting railroad crossing at Woodinville on the Woodinville to Redmond main track will remain in place. GCOR Rule 6.16 is in effect at this location.

8. Line Segments


Road Line Segments Line Segment Limits

ocginent	Lilling
403	Snohomish—Woodinville
408	Snohomish Jct. West to Bromart
404	Redmond to Woodinville
405	Woodinville to Renton
410	Renton to Renton Jct.
	403 408 404 405

9. Locations Not Shown as Stations

Name		Miles - Location	Capacity Cars	Switch Opens
02158	Snohomish on Spur	1.1 from Bromart	45	Both
Spectru	ım Glass Spur	2.0 north of Woodinville	8	North
65805	Douglas Palmer on Spur	5.3 north of Woodinville	14	North
65807	Redmond on Spur	6.5 north of Woodinville	10	Both

10. Grade Chart

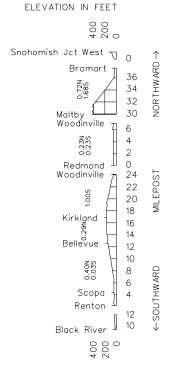

ELEVATION IN FEET

WESTWARD. ◆	Length of Siding (Feet)	Station Nos.	Mile Post	Yakima Valley Subdivision MAIN LINE STATIONS	Rule 4.3	Type of Oper.	Line Segment	Miles to Next Stn.	↑EASTWARD
		12146	229.7 1.9	SP&S JCT.	JM			0.9	
		13004	2.8	KENNEWICK To North Richland 18.7	JP	TWC		4.5	
		13007	7.3	VISTA				9.5	
		13017	16.8	BADGER				6.8	
	8,740	13024	23.6	KIONA		CTC		10.8	
		13034	34.4	GIBBON	JT	TWC		5.6	
		13040	40.0	PROSSER	BP			5.5	
	7,650	13046	45.5	BYRON			6.5		
		13052	52.0	MABTON				8.4	
		13060	60.4	SATUS		TWC	48	10.5	
	7,200	13070	70.9	TOPPENISH	J	CTC		7.4	
		13078	78.3	WAPATO				4.4	
		13082	82.7	PARKER				7.3	
		13089	90.0	YAKIMA	BTUJ CP	TWC		3.8	
		13093	93.8	SELAH				3.4	
	7,650	13096	97.2	POMONA		СТС	Ī	13.2	
		13109	110.4	WYMER				11.4	
		13121	121.8	THRALL		TWC		4.4	
	9,900	13126	127.0 0.0	ELLENSBURG	СВР			124.5	

Radio Channel No. 76 in service.

Yakima Yard Channel No. 66 in service.

Maintenance of Way Channel No. 62 in service.

Radio Call-In					
Pasco - 46(X) Selah Butte - 47(X)					
Prosser - 58(X)	3(X) Yakima - 23(X) Ellensburg - 80(X)				
Emergency - Call 911					
Dispr X=0, Mechanical X=2, Field Support X=3, Warm Bearing X=5					

MP 1.9 to MP 127.0

Train Dispatcher Telephone Number—8-234-1607

Speed Regulations

1(A). Speed—Maximum

B). Speed—Permanent Restrictions	
MP 1.9 to MP 4.3	5 MPH.
MP 21.9 to MP 22.7 4	0 MPH.
MP 22.7 to MP 27.7 4	5 MPH.
MP 27.7 to MP 27.9 4	0 MPH.
MP 27.9 to MP 32.1 4	5 MPH.
MP 32.1 to MP 32.9 3	0 MPH.
MP 32.9 to MP 36.0 4	5 MPH.
MP 39.2 to MP 41.7 4	5 MPH.
MP 87.4 to MP 88.0 3	5 MPH.
MP 88.0 to MP 91.0, HER 2	5 MPH.
MP 91.0 to MP 92.1	5 MPH.
MP 92.1 to MP 96.3 4	0 MPH.
MP 96.3 to MP 97.0	5 MPH.
MP 97.0 to MP 99.6 4	5 MPH.
MP 99.6 to MP 102.3	5 MPH.
MP 102.3 to MP 104.4 2	5 MPH.
MP 104.4 to MP 105.6 3	OMPH.
MP 105.6 to MP 110.8 3	5 MPH.
MP 110.8 to MP 112.2 3	60 MPH.

Freight

1(C). Speed—Switches and Turnouts

Through dual control turnouts at the following locations: Kiona, Byron, Toppenish, Pomona & Ellensburg 30 MPH.

1(D). Speed—Other

Item 1(A) of the System Special Instructions applies.

Freight trains over 100 TOB 40 MPH.

See Item 1 of the System Special Instructions for additional speed restrictions.

2. Bridge and Equipment Weight Restrictions Maximum Gross Weight of Car

SP&S Jct. to Ellensburg 143 tons, Restriction B

Six-axle locomotives and derricks are not permitted on all Ellensburg yard tracks except the Siding Extension, Track 739, and the Dock Track, track 735.

3. Type of Operation

TWC—in effect:

MP 1.9 to MP 22.2

MP 24.0 to MP 44.2

MP 45.8 to MP 72.2 MP 73.8 to MP 97.4

MP 99.1 to MP 127.0/MP 0.0

CTC-in effect:

MP 22.2 to MP 24.0

MP 44.2 to MP 45.8

MP 72.2 to MP 73.8

MP 97.4 to MP 99.1

Freight

49 MPH.

MP 127/0.0 to MP 1.8 (Stampede Subdivision)

4. General Code of Operating Rules Items

Rule 5.8.2—Quiet Zone in effect between MP 89.9 and MP 90.9. Requirement for whistle signal 7 is not in effect. All other whistle requirements remain in effect.

Rule 6.19—When flagging is required, distance will be 1.5 miles between SP&S Jct. and Ellensburg.

5. Trackside Warning Detectors (TWD)

- A. Protecting bridges, tunnels or other structures MP 124.2—WWD only—Recall Code 598
- B. Other TWD locations

MP 19.5—Recall Code 588

MP 30.9—Slide fence detector MP 30.9 to MP 31.0

MP 35.9—Slide fence detector MP 35.9 to MP 36.0

MP 49.6—Recall Code 238

MP 79.8—Recall Code 498

MP 94.8—Recall Code 478

MP 101.2—DED/Exception Reporting

MP 106.5—DED/Exception Reporting

MP 106.5—Slide fence detector MP 106.5 to MP 107.3

MP 110.2—DED/Exception Reporting

MP 116.4—DED/Exception Reporting

MP 124.2—EWD only—Recall Code 598

70 NORTHWEST DIVISION—No. 3—April 26, 2006—Yakima Valley Subdivision

6. FRA Excepted Track

All yard tracks-

Kennewick: All tracks greater than 30 feet from main except Tracks 1058, 1035, and those portions of tracks 1043, 1056 and 1028 located within 30 feet of main.

Gibbon: All tracks greater than 30 feet from main except Tracks 2541, 2542, 2544 and those portions of track 2545 located within 30 feet of main.

Mabton: All tracks greater than 30 feet from main except
Tracks 2588, 9956 and those portions of track 2582 located
within 30 feet of main.

Toppenish: All tracks greater than 30 feet from main except Tracks 9983, 2697, 2620, 2698 and those portions of tracks 2624, 2610 and 2615 located within 30 feet of main.

Yakima: including all UP tracks and tracks greater than 30 feet from main track, except tracks 101 and Hi Line Track 113

Prosser: All tracks greater than 30 feet from main except tracks 2551,2558 and those portions of tracks 2557, 2580, 2556 located within 30 feet of main.

Pomona: except track 701. Wymer: except siding track 710.

Thrall: all tracks 30 feet from the main track.

Ellensburg: all tracks greater than 30 feet from main and

siding.

7. Special Conditions

Between SP&S Jct. and Ellensburg—Westbound trains departing Pasco must notify the dispatcher of their departure time from Pasco prior to passing Vista and they must have an authority track warrant for movement beyond SP&S Jct. prior to departure.

Kennewick—All trains destined Pasco will channel 89 to request permission to enter Pasco Yard and yard track destination from the Pasco control operator prior to departing MP 3.2 Fruitland Street Kennewick.

Access to UPRR operation to Richland Jct. and Hanford Rail System will be track 1043 via track 1058 at West Kennewick.

Badger—The west switch of Track 2528 (former siding) has been removed from service.

Gibbon—Trains picking up or setting out must not block crossings. The east crossing is Hanson Road located at MP 33.67, 900 feet west of east switch for Track 2541. The west crossing is a private crossing located at MP 35.53, 900 feet west of west switch of Track 2541. The distance between Hanson Road and the Granger Sub Jct. switch is 5,750 feet. The total distance between the two crossings is 9,650 feet. When setting out B/O cars, spot car to jacking pads located at east end of Track 2543.

Mabton—When setting out B/O cars, spot cars to jacking pads located at east end of track.

Toppenish—Interchange with Toppenish, Simcoe and Western Railroad (TSWR) will be on the TSWR track (Track 2690) immediately west of the derail.

When switching LSI Track 2610, leave train clear of Buena Way crossing. Do not leave train on main track at Toppenish Ave., account crossing signals are continuously activated.

Between Parker and Selah—Westbound trains at MP 84 between Parker and Yakima, sign has been placed 'Broadcast Approach Channel 19'.

Eastbound trains at MP 93 between Selah and Yakima, sign has been placed 'Broadcast Approach Channel 19'.

Westbound trains passing sign at MP 84 and Eastbound trains passing sign at MP 93 will turn their radio to Channel 19 and broadcast their train approaching Yakima by stating, for example, "BNSF 4435 West passing Union Gap, over" for Westbound movement or "BNSF 4910 East passing Selah Gap, over" for Eastbound movement. Crew will wait for a response from the Yakima Emergency Services Command Center who will state "Yakima Command Center received, out". If no acknowledgment from Command Center is received, crew member will repeat the broadcast and state "out" and return their radio to main line radio channel 76. At all times, a minimum of one radio will remain on the main line channel.

Yakima—In the east yard and UPRR Yard, a minimum of two hand brakes must be applied all cuts of cars in yard tracks.

Yakima Close Clearance—At Yakima Precast Track 223 and Western Materials Track 220, will not clear a person on the side of car. Do not pass the "No Admittance" sign located at the cement silo at Yakima Precast track 223 account low overhead clearance will not clear a person on a high ladder.

Track 101 East End, the normal position for the switch is lined and locked for Track 101 and the sand track switch Track 156 must be lined and locked for Track 156 as this track is used as the East derail for the East Yard. When not in use, the switch at Steiners Track 155 must be lined and locked for the Sand Track 156. When switching industries off the Hi Line Track 113, stop and wait for signals to activate before occupying the crossings.

Cars must not be left between the main track switch at Hanson Fruit Track 154 and the Hass private crossing on Hanson Fruit Track 153 as cars will not clear the Washington Street circuit and will shorten the visual approach for the main track at Washington Street.

Between Pomona and Thrall—Watch for falling rocks between MP 99.0 and MP 120.0.

At Pomona, when setting out bad order cars, spot to dock track 706.

Ellensburg—When setting out B/O cars, spot to yellow jacking pads on west end of Track 739.

Highway Grade Crossing Warning Systems—Each train must stop before entering the following crossings and permit a crew member to dismount to flag highway traffic to a stop. The locomotive may then proceed through the crossing, and the flagging crew member may reboard the locomotive before the remainder of the train proceeds through the crossing.

MP 88.22, Mead Avenue on Tracks 101, 102, 103, 104 & 105

MP 70.81, East 2nd Avenue on Track 2697

MP 71.02, Toppenish Avenue on Track 2697

MP 71.39, Buena Way on Track 2697

MP 72.3, McDonald Road on Tracks 2697 and 2698

Slide Fence Indicators—System Special Instructions Item 8(K) Slide Detectors applies at the slide fences located at MP 30.9, MP 35.9 and MP 106.5 are equipped with radio readout equipment. At these locations, trains will activate a radio response when passing a sign reading "Approaching Slide Fence Detector." If a message stating "NO DEFECTS" is received, trains may proceed at the prescribed speed.

High Load Detector—A high load/dragging equipment detector is located at MP 124.2. When a defect is detected, a radio broadcast message will identify the high wide and/or defect equipment by axle count after the entire train has passed the circuit. It will be the responsibility of the inbound crew to inspect and set out the oversize and/or defective car unless that crew is relieved of that responsibility by the

dispatcher. If the dispatcher relieves the inbound crew of that responsibility, the dispatcher assumes the responsibility to arrange for the inspection and set out of the oversize and/or defective car.

Automatic Equipment Identification Locations

Kiona—MP 24.0

Parker-MP 82.6

Test Mile Locations

MP 13.0 to MP 14.0

MP 80.0 to MP 81.0

Flash Flood Warnings—Refer to Item 33, System Special Instructions. The following locations have been identified as "critical areas" and are limited to restricted speed.

MP 3.0—Bridge

MP 59.0 to MP 60.0

MP 65.0—Bridge

MP 76.0—Bridge

MP 84.0—Bridge

MP 85.0—Bridge

MP 86.0 to MP 86.19

MP 90.0 to MP 91.1

MP 96.0 to MP 98.0

MP 99.0 to MP 120.0

MP 121.0—Bridge

MP 123.0—Bridges

MP 125.1—Bridge

Locations Approved for Gravity Drop Movements

Twin Cities Foods—SP&S Jct.

Fruitland Street-Kennewick

Sonoco Fiber-Wapato

Industrial Spur—Parker

Weyerhaeuser—Union Gap

Yakima Yard-West End only—Yakima

Identifying Signals—In signaled territory, when a train is passing a signal displaying other than "Clear" in advance of a control point, a crew member must transmit the following by radio:

Train Identification (Initials, Engine Number and Direction) Signal Name - In advance of (Control Point Location), on (Track) at (Speed) MPH.

Example of transmission:

"BNSF 6301 South approach medium in advance of Napavine South on Main 1 at 50 MPH (on single track main track designation is not necessary).

8. Line Segments

Yard Line Segments

Line Segment Limits

642 Yakima Yard

Road Line Segments

Line Segment Limits

48 SP&S Jct. to Ellensburg


9. Locations Not Shown as Stations

Name		Miles - Location	Capacity Cars	Switch Opens
64908	Richland Jct	6.0 west of Kennewick		Both
64918	Richland	8.0 west of Kennewick	Yard	Both

10. Grade Chart

ELEVATION IN FEET

1600 1400 1200 1000 800 600 400 200

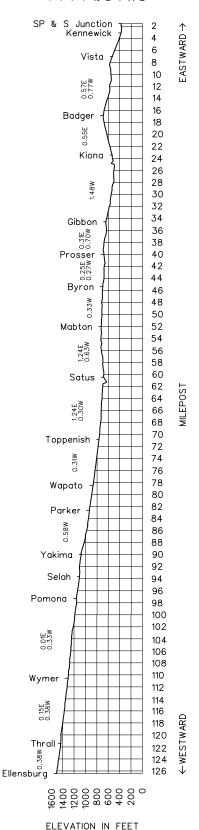

Speed Tables

	SPEED TABLE									
Time	Per Mile	Miles		Time Per Mile		Miles		Time Per Mile		Miles
Min.	Sec.	Per Hour		Min.	Sec.	Per Hour		Min.	Sec.	Per Hour
-	36	100		-	58	62.1		1	40	36.0
-	37	97.3		-	59	61.0		1	42	35.3
-	38	94.7		1	-	60.0		1	44	34.6
-	39	92.3		1	02	58.0		1	46	34.0
-	40	90.0		1	04	56.2		1	48	33.3
-	41	87.8		1	06	54.5		1	50	32.7
-	42	85.7		1	08	52.9		1	52	32.1
-	43	83.7		1	10	51.4		1	54	31.6
-	44	81.8		1	12	50.0		1	56	31.0
-	45	80.0		1	14	48.6		1	58	30.5
-	46	78.3		1	16	47.4		2	-	30.0
-	47	76.6		1	18	46.1		2	05	28.8
-	48	75.0		1	20	45.0		2	10	27.7
-	49	73.5		1	22	43.9		2	15	26.7
-	50	72.0		1	24	42.9		2	30	24.0
-	51	70.6		1	26	41.9		2	45	21.8
-	52	69.2		1	28	40.9		3	-	20.0
-	53	67.9		1	30	40.0		3	30	17.1
-	54	66.6		1	32	39.1		4	-	15.0
-	55	65.5		1	34	38.3		5	-	12.0
-	56	64.2		1	36	37.5		6	-	10.0
-	57	63.2		1	38	36.8		12	-	5.0

FEET	TENTHS OF A MILE
528	.1
1,056	.2
1,584	.3
2,112	.4
2,640	.5
3,168	.6
3,696	.7
4,224	.8
4,752	.9

TERMSDXO

T - Trains

E - Engines

R - Railroad cars

M - Men & equipment fouling track

S - Stop signal

D - Derail & switches properly lined

X - Crossings at grade

O - Other crew movements

Remember "TERMSDXO" when shoving cars

To assist in determining where to start sounding the whistle as described in Whistle Signal 7, use the following:

At the speed indicated in the left column, wait the time indicated in the right column before sounding the whistle.

Train Speed	Delay to Sound Whistle			
40 MPH	3 seconds			
35 MPH	6 seconds			
30 MPH	10 seconds			
25 MPH	16 seconds			
20 MPH	25 seconds			
15 MPH	40 seconds			
10 MPH	1 minute 10 seconds			