

Alliance Division

Timetable No. 1


IN EFFECT AT 0001

Mountain Continental Time

Sunday April 10, 1994

Division Superintendent T.K. LEE Alliance, NE 763–2257

See Back Cover for Division Operating Supervisor's Names, Locations and Phone numbers

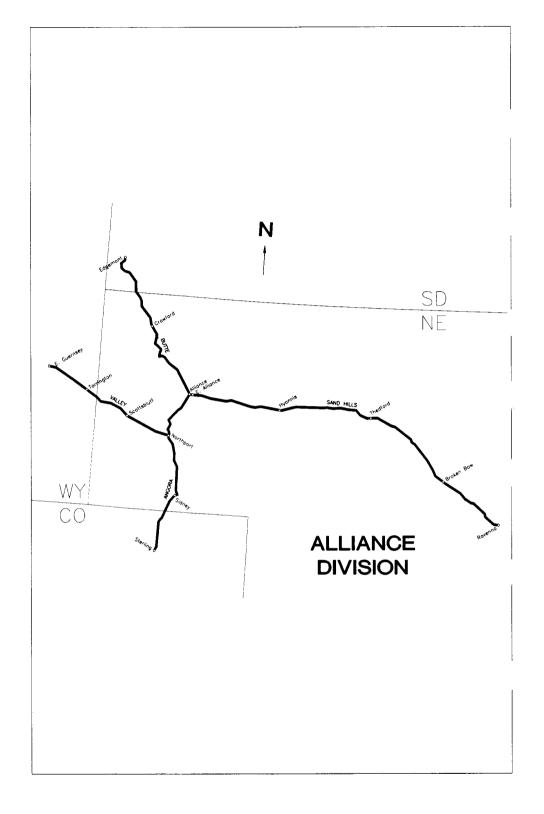

WESTW	Length					Butte Subdiv MAIN LINE			†E A S T
A R D↓	of Siding In Feet	Station Nos.	Line Segment	Mile Post Location	Trk	STATIONS Rule 4.3 Op	oer	Distance from East Alliance	W A R D
				364.4	2MT	EAST ALLIANCE X(2)		0.0	
		30364		365.6		ALLIANCE BKT		1.2	
ſ				365.9		EMERSON		1.5	
l						to South Wye 0.3			
Ī				366.2	2MT	THIRD STREET J		1.8	
Ī				369.1		WEST ALLIANCE		4.7	
ſ	9,860	30374		375.6		BEREA		11.2	
ſ	10,948	30383		384.6		9.0 HEMINGFORD		20.2	
ſ		30399		400.3		15.7 — MARSLAND		35.9	
				403.9		3.6 CROSSOVER 403.9 X(2)		39.5	
				408.4		CROSSOVER 408.4 X C	тс	44.0	
	10,227	30409		409.7		BELMONT X		45.3	
			4	419.8	2MT	CROSSOVER 419.8 X(2)		55.4	
		30422	-	422.9		CRAWFORD BX		58.0	
ſ				423.6		CROSSOVER 423.6 X		58.7	
[425.5		CROSSOVER 425.5 X		60.6	
				432.8		CROSSOVER 432.8 X(2)		67.9	
[30436		437.3		JODER 13.0		72.4	
	7,724	30449		450.3		ARDMORE 8.5		85.4	
	14,167	30457		458.8		RUMFORD 6.4		93.9	
		30466		465.2		PROVO		100.3	
				466.9		CROSSOVER 466.9 X(2)		102.0	
				473.6	2MT	CROSSOVER 473.6 X(2)		108.7	İ
		30475		475.2		EDGEMONT BKT]	111.2	

AAR CHannel 78 in service on this Subdivision. AAR Channel 70 in service at Alliance Yard.

Train Dispatcher Calis-Alliance-20, Belmont-21, Crawford-22,
Ardmore-23,Edgemont-30.
Train Dispatcher Phone Number (308) 763-2314
Emergency Train Dispatcher Cali - 911
MP 473.54 to MP 476.1 is part of and under the jurisdiction of the Powder River Division.

1. Maximum Speeds Permitted – Freight Alliance to Edgemont 50 MPH MP 364.4 to MP 365.9 20 MPH MP 365.9 to MP 366.2 10 MPH MP 365.9 to MP 366.2 10 MPH MP Sterling Lead between Emerson and South Wye 10 MPH MP 393.6 to MP 399.8 40 MPH MP MP 393.6 to MP 399.8 40 MPH MP MP 409.4 to MP 412.8 30 MPH MP 409.4 to MP 412.8 30 MPH MP 412.8 to MP 414.1 20 MPH MP 412.8 to MP 414.1 20 MPH MP 412.8 30 MPH
MP 364.4 to MP 365.9 20 MPH MP 365.9 to MP 366.2 10 MPH Sterling Lead between Emerson and South Wye 10 MPH MP 393.6 to MP 399.8 40 MPH Through siding Belmont 25 MPH MP 409.4 to MP 412.8 30 MPH
MP 365.9 to MP 366.2 10 MPH Sterling Lead between Emerson and South Wye 10 MPH MP 393.6 to MP 399.8 40 MPH Through siding Belmont 25 MPH MP 409.4 to MP 412.8 30 MPH
Sterling Lead between Emerson and South Wye 10 MPH MP 393.6 to MP 399.8 40 MPH Through siding Belmont 25 MPH MP 409.4 to MP 412.8 30 MPH
MP 393.6 to MP 399.8 40 MPH Through siding Belmont 25 MPH MP 409.4 to MP 412.8 30 MPH
Through siding Belmont 25 MPH MP 409.4 to MP 412.8 30 MPH
MP 409.4 to MP 412.8 30 MPH
MP 412.8 to MP 414.1 20 MPH
MP 414.1 to MP 418.8
MP 418.8 to MP 423.1
Through turnouts East and West Rumford
Through siding Rumford

MP 466.7 to MP 469.4 (Both main tracks)	10 MPH.
Edgemont between east and west Highway crossings, head end of train	25 MPH.
Through turnouts:	
Marsland MP 400.3	45 MPH.
Joder MP 437.3	35 MPH.
Provo MP 465.2	35 MPH.
Through all turnouts equipped with dual control switches and on sidings unless	
otherwise specified	25 MPH.
See Item 1 of the System Special Instructions for additional speed restrictions.	

Bridge and Equipment Weight Restrictions-

Maximum Gross Weight of Car:

East Alliance to Edgemont 143 tons

24 ft ore cars (BN95500-95891, 96044-96085) and 35 ft ore cars (BN 99000-99949) not permitted.

3. Type of Operations-

CTC- in effect: Alliance to Edgemont

Two Main Tracks:

MP 366.2 - MP 369.1 MP 400.3 - MP 437.3 MP 465.2 - MP 476.1

Moveable Point Frog- (Refer to System Special Instructions Item 14)

 Marsland
 MP 400.3

 Joder
 MP 437.3

 East Ardmore
 MP 449.5

 West Ardmore
 MP 451.7

 East Rumford
 MP 458.1

 West Rumford
 MP 461.0

 Provo
 MP 465.2

Dual Control Derail-

Belmont Siding MP 408.4

Crawford between No.2 track switch

and MT No.1 MP 423.1

4. General Code of Operating Rules items-

Rule 6.19— When flagging is required, distance will be 2 miles.

Rule 10.2-

Alliance Coop Spur
Buchfinck Bean Spur
Berea Elevator Track
Berea Spud Track
Nida Back Track
Hemingford Mill Track

Marsland Back Track
Edgemont House Track
Joder Back Track
Ardmore Back Track
Rumford Back Track
Provo Back Track

Belmont– Occupied caboose may be dropped over dual control switch in the HAND position after permission has been obtained from the Train Dispatcher. Rules 7.7 and 8.1 of the General Code of Operating Rules are modified accordingly.

5. Trackside Failed Equipment Detector(FED)-

A. Protecting Bridges, Tunnels or Other Structures: NONE

B. Other FED locations:

Nonpareil MP 391.3

Belmont MP 406.2 Both Tracks

Belmont MP 412.7 (DED Only) Both Tracks Belmont MP 414.2 (DED Only) Both Tracks

Crawford MP 428.1 Both Tracks

Ardmore MP 454.6

6. FRA Excepted Track-NONE

7. Special Conditions-

Alliance Terminal Radio Instructions:

AAR Channel 78: Main Line train movements, Dispatchers and emergencies.

AAR Channel 70: All Terminal Operations (except switch engines), arriving and departing

trains, hostlers, taxis, air tests, yard CTC.

All radio transmissions between inbound/outbound trains and the Yardmaster or Diesel Tower will be handled on AAR Channel 70 except in an emergency situation or as directed by the Yardmaster.

Inbound trains will switch from the road channel to AAR channel 70 after passing these respective points:

From the East:

Birdsell

From the South:

East Bonner

From the West:

East Berea

Outbound trains will switch from the yard channel (AAR 70) to the appropriate road channel after passing these respective points:

To the East:

Swepco crossovers

To the South:

MP 4.6 (South Alliance)

To the West:

West Alliance

Milepost sign 416.0 is actually located at MP 415.69

Crawford-

All Eastward trains using helpers on Crawford Hill will have the helper consist coupled directly to the west end of the caboose for the movement on Crawford Hill, with the following exceptions:

- Any train that has a caboose equipped with friction bearing journals will have the helper consist cut in ahead of the caboose.
- When an Eastward coal train is powered by a three (3) unit SD-60 or 4 unit LMX consist, the Crawford helpers will cut in ahead of the caboose.
- All general merchandise trains needing helpers must add these engines to the head-end of the train only.

If an Eastward coal train is powered by a consist comprised of three (3) SD 60's plus one (1) high horsepower locomotive or two (2) SD 60's plus two (2) high horsepower locomotives or three (3) SD 70's, the Crawford Helpers may push against the caboose, keeping in mind all previous instructions.

It will be the responsibility of the conductor to inform the dispatcher where the helper consist will be added to the train. This can be accomplished via the operator at Edgemont.

The helper crew will place the portable draw bar blocks on each end of the caboose they are shoving against.

The conductor and rear brakeman of trains being shoved will ride on the helper consist if the helpers are attached behind the caboose.

The train dispatchers will not authorize a train that is being shoved with the helpers behind the caboose through the crossovers at MP 419.8.

When coming on duty, helper engines arrange to notify the train dispatcher of the engine numbers in their consist before departing.

Test Mile-

West Alliance

MP 371 to MP 372

Hemingford Joder MP 389 to MP 390 MP 433 to MP 434

Joder Rumford

MP 461 to MP 462

Temperature Speed Restrictions-Hot Weather-When temperature exceeds 90 degrees fahrenheit do not exceed the following speeds: Trains 100 tons O/B and over 30 MPH. Trains up to 1 00 tons O/B 45 MPH. Empty coal trains 45 MPH. Cold Weather-When temperature is -10 degrees fahrenheit or colder do not exceed the following speeds: Trains 100 tons O/B and over 30 MPH. Trains up to 1 00 tons O/B 45 MPH. 8. Other Line Segments-Yard Line Segments-Yard Line Seament 890 Alliance 891 Alliance Shop

	Name	Miles-Location	Capacity Cars	Switch Opens
30369	Ginn	1.2 west of West Alliance	12	West
30380	Nida	5.7 west of Berea	35	West
30383	Hemingford Mill Tr.	Hemingford	32	East
	Hemingford Stock Trk.	Hemingford	28	Both
-	Hemingford Old Ewd. Siding	Hemingford	23	East
,	Hemingford Spud Trk.	Hemingford	13	East
*	Hemingford Certified Spur	Hemingford	7	East
30390	Nonpareil Old Pass	6.7 west of Hemingford	66	Both
30390	Nonpareil Back Track	6.7 west of Hemingford	10	Both
30399	Marsland Backtrack	Marsland	17	West
30409	Belmont Back Track.	Belmont	27	Both
30422	Crawford #1	Crawford	5	East
30422	Crawford #2	Crawford	30	East
30422	Crawford #3	Crawford	28	East
30422	Crawford #4	Crawford	30	East
30422	Crawford #5	Crawford	10	East
	Crossover Switch at MP 425.5	2.6 West Crawford	6	East
30436	Joder Backtrack	Joder	6	East
30449	Ardmore Backtrack	Ardmore	17	East
30457	Rumford	Rumford	8	Both
30466	Provo Backtrack	Provo	15	East
30467	Area Wye	1.2 west of Provo	60	Both

					-			_
WEST						Sand Hills Subdiv MAIN LINE		†EAST
W A R	Length of					STATIONS	Distance	W
ļ	Siding In Feet	Station Nos.	Line Segment	Mile Post Location	Trk	Rule 4.3 Oper	from Raven- na	Â
		30126		127.7		RAVENNA BKTX	0.0	
		30128		128.3		WEST RAVENNA	0.6	1
				133.3		CROSSOVER 133.3 X	5.6	1
		30137		137.8		4.5 HAZARD X 0.5	10.1	
				138.3	2MT	CROSSOVER 138.3 X	10.6	
		30143		144.3		LITCHFIELD X	16.6	
				144.6		CROSSOVER 144.6 X	16.9	
				150.6		CROSSOVER 150.6 X(2)	22.9	
		30152		155.0	<u> </u>	MASON 10.1	27.3	
		30166		165.1	—	BERWYN 4.7	37.4	
				169.8	2MT	CROSSOVER 169.8 X(2)	42.6	
		30174		175.0		FAIR X	47.8]
	7,933	30175		176.3		BROKEN BOW BK	49.1	
		30183		185.0		MERNA 5.0	57.8	
				190.0	2MT	CROSSOVER 190.0 X	62.8	
		30194		195.7		ANSELMO 9.9	68.5	
		30206		205.5		LINSCOTT 4.5	78.4	
				210.0	2MT	CROSSOVER 210.0 X(2)	82.9	
		30214	4	214.4		DUNNING 9.5	87.3	
		30224		223.9		HALSEY 6.0	96.8	
				229.9	2MT	CROSSOVER 229.9 X(2)	102.8	
		30234		235.3		NATICK 7.3	108.2	
	8,124	30241		242.6		THEDFORD 6.5	115.5	
		30249		249.1		NORWAY 5.1	122.0	
				254.2	2MT	CROSSOVER 254.2 X(2) CTC	127.1	
		30259		259.3		SENECA 8.0	132.2	
		30267		267.3		MULLEN 6.6	140.2	
				273.9	2MT	CROSSOVER 273.9 X(2)	146.8	
		30277		279.3		HECLA 13.5	152.2	
		30292		292.8		WHITMAN 7.3	165.7	
				300.1	2MT	CROSSOVER 300.1 X(2)	173.0	
		30305		306.9		HYANNIS 7.6	179.8	
		30314		314.5		ASHBY 5.7	187.4	
				320.2	2MT	CROSSOVER 320.2 X(2)	193.1	
		30323		324.8		BINGHAM 9.1	197.7	
	8,737	30333		333.9	2MT	ELLSWORTH 4.5	206.8	
				339.4	- IVI 1	CROSSOVER 339.4 X(2)	212.3	

⊗ EST⊗ €	Length				Sand Hills Subdiv (Cont.) MAIN LINE		it.)		PEASTW
ARD →	of Siding In Feet	Station Nos.	Line Segment	Mile Post Location	Trk	STATIONS Rule 4.3	Oper	Distance from Raven- na	A R D
		30341		344.0	2MT	LAKESIDE		216.9	
		30349		349.2		ANTIOCH		222.1	
	·		4	354.8		CROSSOVER 354.8 X	стс	227.7	١
		30358	7	358.9	2MT	BIRDSELL X		231.8	
				361.8		CROSSOVER 361.8 X(2)		234.5	Ī
				364.4		EAST ALLIANCE X(2)		237.3	

AAR Radio Channel 66 in service on this Subdivision.
AAR Radio Channel 70 in service at Alliance Yard.

Train Dispatcher Calls—Ravenna-04, Mason-13, Broken Bow-12, Dunning-14, Seneca-15, Whitman-16, Bingham-17, Alliance – 10.

Train Dispatcher Telephone Number (308) 763–2315

Emergency Train Dispatcher Call – 911

MP 128.41 to MP 127.7 is part of and under the jurisdiction of the Lincoln Division

1.	Speed Restrictions—	Freight
	Ravenna To East Alliance	50 MPH.
	Trains over 100 tons/OB	50 MPH.
	MP 175.75 to MP 176.40 – Head end restriction	
	MP 364.1 to MP 364.4	20 MPH.
	Through turnouts of begin and end two main tracks and crossovers equipped	
	with dual control switches	
	Through turnouts of controlled sidings	20 MPH.
	Through turnouts at the following locations –	
	MP 155.0 (end two main tracks) - Mason	
	MP 165.1 (begin two main tracks) – Berwyn	
	MP 185.0 (begin two main tracks) – Merna	
	MP 214.4 (end two main tracks) – Dunning	
	MP 259.3 (end two main tracks) – Seneca	
	MP 195.7 (end two main tracks) – Anselmo	
	MP 344.0 (end two main tracks) – Lakeside	
	MP 349.2 (begin two main tracks) – Antioch	35 MPH.
٢	See Item 1 of the System Special Instructions for additional speed restrictions.	

2. Bridge and Equipment Weight Restrictions-

Maximum Gross Weight of Car:

24 ft ore cars (BN95500-95891, 96044-96085) and 35 ft ore cars (BN 99000-99949) not permitted.

3. Type of Operations-

CTC- In effect: Ravenna to East Alliance.

Two Main Tracks:

MP 127.7-MP 155.0	MP 267.3-MP 279.3
MP 165.1-MP 175.0	MP 292.8-MP 306.9
MP 185.0-MP 195.7	MP 314.5-MP 324.8
MP 205.5-MP 214.4	MP 333.9-MP 344.0
MP 223.9-MP 235.3	MP 349.2-MP 364.4
MP 249.1-MP 259.3	

Moveable Point Frog- (Refer to System Special Instructions Item 14)

MP 155.0 - (End Two Main Tracks) - Mason MP 165.1 - (Begin Two Main Tracks) - Berwyn MP 185.0 - (Begin Two Main TraCks) - Merna MP 195.7 - (End Two Main Tracks) - Anselmo MP 214.4 - (End Two Man Tracks) - Dunning

MP 259.3 - (End Two Main Tracks) - Seneca MP 344.0 - (End Two Main Tracks) - Lakeside

MP 349.2 - (Begin Two Main Tracks) - Antioch

4. General Code of Operating Rules Items-

Rule 6.19- When flagging is required, distance will be 2.0 miles.

Rule 10.2-

Hazard Backtrack-Westend-MT No.1 Broken Bow-Single Track-Westend Dunning-Backtrack Hecla-Back Track-Off MT No.2 Bingham-Back Track-Off MT No.2 Lakeside-Backtrack-Off MT No.2 Antioch-Back Track-Off MT No.2

5. Trackside Failed Equipment Detector(FED)-

A. Protecting Bridges, Tunnels or Other Structures: NONE

B. Other FED locations:

Mason MP 156.5 Merna MP 180.9 Linscott MP 200.5 Halsey MP 221.1 Norway MP 247.5 Mullen MP 264.9 Hecia MP 286.6 Hyannis MP 309.0 Lakeside MP 338.1 Both Tracks

6. FRA Excepted Track-NONE

7. Special Conditions-

Temperature Speed Restrictions-

Hot Weather-When temperature exceeds 90 degrees fahrenheit do not exceed the following speeds:

Empty coal trains 45 MPH.

Cold Weather-When temperature is -10 degrees fahrenheit or colder do not exceed the following speeds:

8. Other Line Segments-NONE

	Name	Miles-Location	Capacity Cars	Switch Opens
30132	Sweetwater	5.5 west of Ravenna	11	West
30137	Hazard Back track	Hazard	30	West
30152	Mason Back Track	Mason	8	East
30159	Ansley	4.9 east of Berwyn	40	East
30166	Old Berwyn	2.5 west of Berwyn	28	Both
30175	Broken Bow-Old Pass	Broken Bow	120	Both
30175	Broken Bow-Elevator	Broken Bow	40	Both
30175	Broken Bow-Mill Track	Broken Bow	40	Both
30175	Broken Bow-City Track	Broken Bow	24	Both
30175	Broken Bow- House Track	Broken Bow	8	West
30175	Broken Bow-Sargent Pipr	Broken Bow	5	East
30183	Elevator Track-Merna	Merna	54	Both
30206	Linscott Back track	Linscott	5	Both
30214	Old Dunning	1.1 west Dunning	15	West
30224	Halsey Back track	Halsey	25 ·	Both
30234	Natick Back track	Natick	20	Both
30256	Seneca-East Old Pass	Seneca	30	East
30256	Seneca-West Old Pass	Seneca	30	West
30256	Seneca- East #1 Track	Seneca	15	East
30256	Seneca- West #1 Track	Seneca	15	West
30267	Mullen Back Track	Mullen	30	Both
30277	Hecla Back track	Hecla	10	Both
30292	Whitman Back Track	Whitman	20	Both
30305	Hyannis Back Track	Hyannis	35	Both
30314	Ashby Back Track	Ashby	15	Both
30323	Bingham Back Track	Bingham	12	Both
30333	Ellsworth Back Track	Ellsworth	12	East
30341	Lakeside Back Track	Lakeside	12	Both
30349	Antioch Back Track	Antioch	6	Both
30360	RMC	5.6 east of Alliance	189	Both
30361	Swepco	4.1 east of Alliance		Loop
	Koester's	0.8 east of East Alliance	42	Both

_									
WESTW	Length					Valley Subdiv MAIN LINE			P A S T
A R D ↓	of Siding In Feet	Station Nos.	Line Segment	Mile Post Location	Trk	STATIONS Rule 4.3 Op	er	Distance from North- port	WARD
		32034		0.0		NORTHPORT JT		0.0	
					1	WEST NORTHPORT			ĺ
				0.4	2MT	To UP Crossing 0.7 JT		0.4	İ
		32036	1	3.4		DEGRAW		3.4	ĺ
		32046		11.8		8.4 BAYARD		11.8	
	7,182			15.9	1	BRADLEY		15.9	
		32056		21.8	1	5.9 — MINATARE		21.8	ĺ
	7,148			24.7		2.9 WINTERS		24.7	
		32065		30.8		SCOTTSBLUFF BKT		30.8	
	7,167	32072		36.8		JANE		36.8	
		32074	5	40.2		3.4 MITCHELL T	тс	40.2	
	7,284		3	44.6		ENTERPRISE]	44.6	ĺ
		32080		46.5		MORRILL		46.5	
		32088		53.7		7.2 HENRY		53.7	
	7,554			57.3		3.6 ————————————————————————————————————		57.3	
		32096		62.2		TORRINGTON 7.4	1	62.2	i
	7,115			69.6		TEXAS		69.6	•
		32106		71.7		LINGLE 8.3		71.7	
ļ	7,238			80.0		GRATTAN 2.0		80.0	
		32116		82.0		FORT LARAMIE		82.0	
ļ				91.2		EAST GUERNSEY		91.2	
		32129		95.0	2MT	GUERNSEY BKTY		95.0	

AAR Radio Channel 54 in service on this Subdivision.

AAR Radio Channel 85 in service at Guernsey Yard.

Train Dispatchers Calls-Bridgeport-71, Scottsbluff-81, Torrington-82.
Train Dispatcher Phone Number (308) 763-2317
Emergency Train Dispatcher Call - 911
MP 91.76 to MP 95.0 is part of and under the jurisdiction of the Powder River Division

1.	Maximum Speeds Permitted-	Freight
	Northport to Guernsey	50 MPH.
	Northport to Guernsey- Trains 100 tons/OB and over	50 MPH.
	Northport Wye	
	Bridge 87.69 East Guernsey, cars heavier than 134 tons	
	MP 91.2 to MP 95.0	
	Bridge 91.47 East Guernsey, cars heavier than 134 tons	10 MPH.
	Guernsey–MT 1 and MT 2 through fuel pit area until entire movement clears	
	the area	10 MPH.
	Through all turnouts equipped with dual control switches and on sidings	
	unless otherwise specified	25 MPH.

See Item 1 of the System Special Instructions for additional speed restrictions.

2. Bridge and Equipment Weight Restrictions-

Maximum Gross Weight of Car:

Northport to Guernsey 143 tons.

24 ft ore cars (BN95500-95891, 96044-96085) and 35 ft ore cars (BN 99000-99949) not permitted.

Six axle locomotives in excess of 165 tons lbs not permitted on following tracks:

Bayard Factory Yard-Pulp track

Scottsbluff Factory Yard-Seed track beyond switch to No. 9 track, Factory No. 1 and No. 6 track, Rock and Syrup track

Not more than one locomotive permitted on the following tracks:

Bayard-All Sugar Factory trackage except Storage 1 & 2

Minatare-Stock track

Mitchell-All Sugar Factory trackage except Main Line Storage 1 & 2

Lingle-Elevator track

3. Type of Operations-

CTC- in effect: Northport to Guernsey

Yard Limits -in effect:

MP 96.2 to MP 96.0

Two Main Tracks:

MP 0.4 – MP 3.4 MP 93.9 – MP 95.4

4. General Code of Operating Rules Items-

Rule 6.19- When flagging is required, distance will be 2 miles.

Rule 10.2

Simplot Spur Minatare House Track Kelly Bean Spur

Henry Passing Track Torrington Orphan Track Torrington Holly Sugar Track

Morrill Bean Track

Heldt Spur Mitchell House Track Dakota Portland Cement

Rule 8.3—Guernsey: Normal position of Main Track switches DOES NOT APPLY at the main track switches located at MP 91.7, MP 93.9, and MP 95.4. These switches may be left lined as last used; however, they must be <u>locked</u>. Trains must approach these switches expecting to find them lined against movement.

5. Trackside Failed Equipment Detector(FED)-

A. Protecting Bridges, Tunnels or Other Structures: NONE

B. Other FED locations:

 Bradley
 MP 20.5

 Mitchell
 MP 42.3

 Lingle
 MP 65.9

 Ft. Laramie
 MP 82.9

6. FRA Excepted Track- NONE

7. Special Conditions-

Northport- BN crews operating on UP trackage at Northport, Nebraska must comply with instructions from UP Officers or supervisors and must comply with UP Timetable Special Instructions.

Engineer taking train from UP at Northport will assume the train has received a proper initial terminal air test by UP under run-through certified with FRA.

Before fouling UP main track at Northport, BN crew must contact UP Dispatcher at North Platte using UP channel 1 on UP locomotive or caboose on Digital Radio channel 2727. If contact cannot be established in this way, contact BN train dispatcher, Alliance.

When trains equipped with "End of Train Devices" are delivered to the UP at Northport and are left unattended, handbrakes are to be applied on the 5 head cars.

When trains are delivered to the Union Pacific at Northport, the Engineer will remove the Head End Device from the lead or controlling Burlington Northern locomotive and place it on the Union Pacific lead or controlling locomotive at Northport.

At West Northport: Track connecting Angora Subdivision to Union Pacific Main Line located at MP 34.3 is known as the "UP TRANSFER TRACK."

Local Crossing Ordinance: Scottsbluff— Standing train must not block crossing more than five minutes, moving train more than ten minutes.

Temperature Speed Restrictions— Hot Weather—When temperature exceeds 90 degrees fahrenheit do not exceed the

The treatmen timen temperature exceeded by degrees itamenical de not ex	AUGUG IIIC
following speeds:	
Trains 100 tons O/B and over	30 MPH.
Trains up to 100 tons O/B	
Empty coal trains	45 MPH.
Cold Weather-When temperature is -10 degrees fahrenheit or colder do n	ot exceed the
following speeds:	
Trains 100 tons O/B and over	30 MPH

Trains 100 tons O/B and over 30 MPH.
Trains up to 100 tons O/B 45 MPH.
Empty coal trains 45 MPH.

Test Miles-MP 8.0 to MP 9.0, MP 74.0 to MP 75.0

8. Other Line Segments-

Yard Line Segments

Line Segment Yard

896 Scottsbluff

	Name	Miles-Location	Capacity Cars	Switch Opens
32034	South Storage	Northport	57	Both
32036	Glover Group Track	1.1 East of DeGraw on MT2	120	West
32046	Bayard Trk. Siding	Bayard	103	Both
32046	Bayard Bean Track	Bayard	26	West
32046	Bayard Sugar Factory West Wye Trk.	Bayard	139	West
32046	Simplot Spur	0.1 east of Bayard	3	East
32056	Minatare Siding	Minatare	113	Both
32056	Keliy Bean Spur	1.0 west of Minatare	5	West
32056	Minatare North House Trk.	Minatare	39	Both
32068	Heldt	2.7 west of Scottsbluff	15	West
32074	Mitchell North Siding	Mitchell	122	Both
32074	Mitchell Trk. to serve Sugar Factory	Mitchell	157	Both
32080	Morrill Bean Track	Morrill	34	East
32080	Morrill House Track	Morrill	74	West
32080	Morrill Old Pass	Morrill		West
32088	Henry	Henry	61	West
32096	Torrington Turkey Track	Torrington	17	West
32096	Torrington Orphan Track	Torrington	13	East
32096	Torrington No. Siding	Torrington	52	Both
32106	Lingle Pass	Lingle	78	Both
32116	Ft. Laramie Back Trk.	Ft. Laramie	35	East

Length					=				
of Siding			Mile		STATIONS			Distance from	1
in Feet	Nos.	Segment	Location	Trk	Ru	e 4.3	Oper	Third Street]
			0.3		THIRD STREET	J	стс	0.0]
<u>:-</u> .			0.7		SOUTH WYE	Υ		0.4	1
					to Emerson 0.3				l
			3.0	_	PRAIRIE	ΥX		2.7	1
			4.6	2MT	SOUTH ALLIANCE			4.3]
8,745	32014		13.1		BONNER		Ī	12.8	Ì
7,132	32022		20.3		ANGÖRA]	20.0	
	32034		33.8		NORTHPORT	JT		33.5]
					UP CROSSING		•		1
		21	34.4			IJŦ	стс	34.1	l
7,400	84003		36.5		BRIDGEPORT			36.2	
7,122	84011		44.2		MUDD SPRINGS			43.9]
7,342	84023		56.4		DALTON			56.1	Ī
	84028		62.3		GURLEY			62.0	١
8,355	84035		69.2		HUNTSMAN	Т		68.9	Ì
	84042	ĺ	75.4		SIDNEY			75.1	١
7,242	84050		83.0		LORENZO			82.7	
8,995	84056		90.0	i	PEETZ			89.7	
7,122	84067		98.3		BUCHANAN			98.0	
		[112.1		EAST STERLING			111.8	
	84081		115.1		STERLING BJ	KTY		114.8	
	7,400 7,132 7,242 8,355 7,242 8,996	7,400 84003 7,122 84011 7,342 84028 8,355 84035 8,996 84066 7,122 84067	of Siding In Nos. Station Nos. Segment 8,745 32014 7,132 32022 32034 7,400 84003 7,122 84011 7,342 84023 84028 8,355 84035 84042 7,242 84050 8,996 84056 7,122 84067	of Siding In Feet Station Nos. Line Line Post Location Mile Post Location 3.0 0.3 4.6 3.0 4.6 8,745 32014 13.1 7,132 32022 20.3 32034 33.8 7,400 84003 36.5 7,122 84011 44.2 7,342 84023 62.3 8,355 84035 69.2 7,242 84050 83.0 8,995 84056 90.0 7,122 84067 98.3 112.1 112.1	of Siding In Feet Station Nos. Line Segment Mile Post Location Trk 3.0<	Station Station Feet Station Nos. Segment Location Trik STATIONS Trik Rui	Siding In Feet Station Feet Sudject Station Feet Station	Station Station Station Station Nos. Segment Location Trik STATIONS Trik Rule 4.3 Oper	Length Siding In Nos. Station Nos. Segment Coation Trik STATIONS Trik Rule 4.3 Oper Third Street STATIONS Trik Rule 4.3 Oper Third Street J CTC O.0

AAR Radio Channel 54 in service on this Subdivision. AAR Radio Channel 70 in service at Alliance yard.

Train Dispatcher Calis-Ailiance-70, Bridgeport-71, Huntsman-72, Peetz-73.

Train Dispatcher Phone Number (308) 763–2317 Emergency Train Dispatcher Cali – 911

Sterling (Beyond MP 115.1) is part of and under the jurisdiction of the Denver Division

d Marianum Canada Darmittad	
1. Maximum Speeds Permitted Freigi Third Street to Sterling:	ht
MP 0.3 to MP 3.0 East bound trains	H.
MP 0.3 to MP 3.0-West bound-head end only 10 MP	d.
MP 3.0 to MP 112.2-Trains up to 100 tons O/B 50 MP	₼.
Over hand throw switches:	
MP 1.0	┥.
MP 3.2 MT 2	┥.
Sterling lead between South Wye and Emerson 10 MPH	Ⅎ.
MP 24.4 to MP 30.2	┥.
Over all UP Dual Control switches	Ⅎ.
Union Pacific Transfer Track 10 MPH	┥.
MP 33.7 to MP 34.4	1 .
MP 34.4 to MP 36.8	Ä.
MP 49.5 to MP 56.0	i.
On siding Huntsman 10 MPH	i.
Throughall turnouts equipped with dual control switches and on sidings	••
unless otherwise specified	4
Item 1A, Applies to loaded or empty C6 hoppers in train.	••

See Item 1 of the System Special Instructions for additional speed restrictions.

Bridge and Equipment Weight Restrictions— Maximum Gross Weight of Car:

Third street Alliance to Sterling 143 tons.

24 ft ore cars (BN95500-95891, 96044-96085) and 35 ft ore cars (BN 99000-99949) not permitted

Six axle locomotives in excess of 166.5 tons not permitted on the following tracks:

Trinidad Bean Track

New Yard Track

3. Type of Operations-

CTC- in effect: Third Street to South Wye and Prairie to Sterling.

Yard Limits —in effect: MP 0.7 to MP 3.0

BN MP 112.2 to UP MP 59.1

Two main tracks- MP 3.0 to MP 4.6.

4. General Code of Operating Rules Items-

Rule 6.19- When flagging is required, distance will be 2 miles.

Rule 10.2-

Bonner Back Track Mudd Springs Old Elevator

Dalton Elevator Spur

Peetz Elevator Track Spur Ginther

ator

Ackerman

Bridgeport Dock Track 5. Trackside Falled Equipment Detector(FED)—

A. Protecting Bridges, Tunnels or Other Structures: NONE

B. Other FED locations:

 Bridgeport
 MP 39.4

 Dalton
 MP 61.5

 Lorenzo
 MP 85.9

 Padroni
 MP 104.5

6. FRA Excepted Track-NONE

7. Special Conditions-

Alliance—The normal position for the hand throw crossover from the Sterling Main to Alliance South Yard located at MP 1.0 is lined and locked for crossover movement. Targets will display red when lined for other than crossover movement.

Northport– BN crews operating on UP trackage at Northport, Nebraska must comply with instructions from UP Officers or Supervisors and must comply with UP Timetable Special Instructions.

Engineer taking train from UP at Northport will assume the train has received a proper initial terminal air test by UP under run-through certified with FRA.

Before fouling UP main track at Northport, BN crew must contact UP Dispatcher at North Platte using UP channel 1 on UP locomotive or caboose on Digital Radio channel 2727. If contact cannot be established in this way, contact BN train dispatcher, Alliance.

When trains equipped with "End of Train Devices" are delivered to the UP at Northport and are left unattended, handbrakes are to be applied on the 5 head cars.

When trains are delivered to the Union Pacific at Northport, the Engineer will remove the Head End Device from the lead or controlling Burlington Northern locomotive and place it on the Union Pacific lead or controlling locomotive at Northport.

At West Northport: Track Connecting Angora Subdivison to Union Pacific Main Line located at MP 34.3 is known as the "UP TRANSFER TRACK".

Temperature Speed Restrictions-

Hot Weather-When temperature exceeds 90 degrees fahrenheit do not exceed the following speeds:

Cold Weather—When temperature is -10 degrees fahrenheit or colder do not exceed the following encode:

following speeds:

Test Miles-

MP 9.0 to MP 10.0

MP 23.0 to MP 24.0

MP 41.0 to MP 42.0

MP 64.0 to MP 65.0

MP 87.0 to MP 88.0

MP 103.0 to MP 104.0

8. Other Line Segments-NONE

	Name	Miles-Location	Capacity Cars	Switch Opens
32007	Letan	2.0 west of South Alliance	60	Both
32022	Angora Old Pass	Angora	93	Both
32034	U.P. Conn. Trk.	Northport		East
32028	Vance	6.1 west of Angora	40	East
84003	Bridgeport Trk. #1	Bridgeport	57	Both
84003	Bridgeport Trk. #6	Bridgeport	47	Both
84003	Bridgeport Trk. #19	Bridgeport	5	West
84003	Bridgeport Trk. #31	Bridgeport	114	East
84003	Bridgeport Trk. #16	Bridgeport	15	West
84028	Gurley Trk. #1	Gurley	45	Both
84035	Huntsman Wye Trk. to Sidney and Lowe R. R.	Huntsman		East
84042	Sidney Trk. #1	Sidney	39	Both
84042	Sidney U.P. Conn. Trk.	Sidney		West
84042	Sidney Trk. #7	Sidney	57	Both
84050	Lorenzo Trk. #1	Lorenzo	36	Both
84071	Padroni	6.0 west of Buchanan	35	East
84073	Ginther	7.8 west ot Buchanan	6	West
84078	Ackerman	14.9 west of Buchanan	25	West

	 -	.

Temperature Speed Restrictions-

Hot Weather-When temperature exceeds 90 degrees fahrenheit do not exceed the following speeds:

Cold Weather-When temperature is -10 degrees fahrenheit or colder do not exceed the

Test Miles-

MP 9.0 to MP 10.0

MP 23.0 to MP 24.0

MP 41.0 to MP 42.0

MP 64.0 to MP 65.0

MP 87.0 to MP 88.0 MP 103.0 to MP 104.0

Other I he Comments NO

8. Other Line Segments-NONE

	Name	Miles-Location	Capacity Cars	Switch Opens
32007	Letan	2.0 west of South Alliance	60	Both
32022	Angora Old Pass	Angora	93	Both
32034	U.P. Conn. Trk.	Northport		East
32028	Vance	6.1 west of Angora	40	East
84003	Bridgeport Trk. #1	Bridgeport	57	Both
84003	Bridgeport Trk. #6	Bridgeport	47	Both
84003	Bridgeport Trk. #19	Bridgeport	5	West
84003	Bridgeport Trk. #31	Bridgeport	114	East
84003	Bridgeport Trk. #16	Bridgeport	15	West
84028	Gurley Trk. #1	Gurley	45	Both
84035	Huntsman Wye Trk. to Sidney and Lowe R. R.	Huntsman		East
84042	Sidney Trk. #1	Sidney	39	Both
84042	Sidney U.P. Conn. Trk.	Sidney		West
84042	Sidney Trk. #7	Sidney	57	Both
84050	Lorenzo Trk. #1	Lorenzo	36	Both
84071	Padroni	6.0 west of Buchanan	35	East
84073	Ginther	7.8 west ot Buchanan	6	West
84078	Ackerman	14.9 west of Buchanan	25	West