

# **BE SAFE Now...**

|  |               |
|--|---------------|
| J. T. Thompson, Trainmaster .....          | Amarillo      |
| C. N. Jackson, RFE .....                   | Amarillo      |
| J. R. Staven, Mechanical Supt. ....        | Childress     |
| L. D. Tackitt, Trainmaster .....           | Childress     |
| L. D. Barber, RFE .....                    | Childress     |
| S. P. Mallory, Trainmaster .....           | Wichita Falls |
| K. R. Larsen, RFE .....                    | Wichita Falls |
| D. L. Christian, Trainmaster .....         | Wichita Falls |
| C. R. Vining, Chief Engineer .....         | Fort Worth    |
| Homer Anderson, Trainmaster .....          | Fort Worth    |
| J. W. Spivey, Trainmaster .....            | Fort Worth    |
| B. G. Gilbert, Chief Dispatcher .....      | Fort Worth    |
| D. S. Mondey, Asst. Chief Dispatcher ..... | Fort Worth    |

# **BURLINGTON NORTHERN INC. FORT WORTH AND DENVER RAILWAY COMPANY**

**FORT WORTH DIVISION**

---

## **TIME TABLE AND SPECIAL INSTRUCTIONS 6**

**IN EFFECT AT 12:01 A.M.**

**Central Standard Time**

### **Sunday, November 9, 1980**

---

**PRESIDENT**

**A. E. Michon**

**GENERAL MANAGER**

**E. L. Phillips**

**SUPERINTENDENT**

**J. R. Lewis**

**SUPERINTENDENT  
OF TRANSPORTATION**

**C. N. Parker**

2 FORT WORTH DIVN — 1st Subdivn

| Rule 6(A) Signs | Length of Sidings in Feet | Station Numbers | Line Segment | Mile Post Location | Distance From T&P Jct. | MAIN LINE STATIONS OFFICE CALLS |               |
|-----------------|---------------------------|-----------------|--------------|--------------------|------------------------|---------------------------------|---------------|
| Y               |                           |                 |              | 0.0                | 0.0                    | T&P JCT.                        |               |
| Y               |                           |                 |              | 0.5                | 0.5                    | NINTH STREET                    |               |
| Y               |                           |                 |              | 0.9                | 0.9                    | HAMPTON                         |               |
| Y               |                           |                 |              | 2.0                | 2.0                    | MP 2                            |               |
| Y               |                           |                 |              | 2.5                | 2.5                    | RIO                             |               |
| BKRTY           |                           | 40841           |              | 6.1                | 6.1                    | FR                              | NORTH YARD    |
| IY              | 6,477                     | 40845           |              | 9.1                | 9.1                    | GN                              | SAGINAW       |
|                 | 6,894                     | 40854           |              | 11.0               | 11.0                   |                                 | MP 11         |
|                 | 6,288                     | 40870           |              | 19.0               | 19.0                   |                                 | AVONDALE      |
|                 | 6,098                     | 40876           |              | 34.6               | 34.6                   |                                 | HERMAN        |
| Y               | 5,922                     | 40887           |              | 40.3               | 40.3                   | CA                              | DECATUR       |
|                 | 6,698                     | 40899           |              | 51.7               | 51.7                   |                                 | ALVORD        |
| A               |                           | 40404           |              | 68.8               | 68.8                   |                                 | FRUITLAND     |
|                 | 6,890                     | 40415           |              | 68.5               | 68.5                   | BI                              | BOWIE         |
|                 | 6,801                     | 40425           |              | 79.1               | 79.1                   |                                 | BELLEVUE      |
|                 | 6,269                     | 40441           |              | 90.2               | 90.2                   | DK                              | DICKWORTHAM   |
| BKRTUY          |                           | 40449           |              | 105.5              | 105.5                  |                                 | JOLLY         |
| J               |                           | 40458           |              | 114.1              | 114.1                  | 2MT W                           | WICHITA FALLS |
|                 | 6,681                     | 40460           |              | 118.4              | 118.4                  |                                 | VALLEY JCT.   |
|                 | 6,614                     | 40471           |              | 124.3              | 124.3                  |                                 | IOWA PARK     |
|                 |                           | 40476           |              | 135.9              | 135.9                  |                                 | FOWLKES       |
|                 | 6,577                     | 40488           |              | 140.3              | 140.3                  |                                 | ELECTRA       |
|                 | 7,844                     | 40499           |              | 148.1              | 148.1                  |                                 | HARROLD       |
| I               | 6,650                     | 40514           |              | 168.3              | 168.3                  | RN                              | VERNON        |
| AT              | 6,597                     | 40527           |              | 178.7              | 178.7                  |                                 | CHILLICOTHE   |
| A               |                           | 40532           |              | 191.8              | 191.8                  | Q                               | QUANAH        |
|                 | 6,488                     | 40536           |              | 196.7              | 196.7                  |                                 | ACME          |
|                 | 6,575                     | 40547           |              | 200.5              | 200.5                  |                                 | GOODLETT      |
| BKRTY           |                           | 40556           |              | 211.7              | 211.7                  |                                 | KIRKLAND      |
|                 |                           |                 |              | 220.2              | 220.2                  | RS                              | CHILDRESS     |

FORT WORTH DIVN — 4th Subdivn

| Rule 6(A) Signs | Station Numbers | Line Segment | Mile Post Location | Distance From Childress | BRANCH LINE STATIONS OFFICE CALLS |            |
|-----------------|-----------------|--------------|--------------------|-------------------------|-----------------------------------|------------|
| BKRTY           | 40556           |              | 220.2              | 0.0                     | RS                                | CHILDRESS  |
| Y               | 88530           | 489          | 252.0              | 31.8                    |                                   | WELLINGTON |

FORT WORTH DIVN — 2nd Subdivn

| Rule 6(A) Signs | Length of Sidings in Feet | Station Numbers | Line Segment | Mile Post Location | Distance From Childress | MAIN LINE STATIONS OFFICE CALLS |             |
|-----------------|---------------------------|-----------------|--------------|--------------------|-------------------------|---------------------------------|-------------|
| BKRTY           |                           | 40556           |              | 220.2              | 0.0                     | RS                              | CHILDRESS   |
|                 | 6,499                     | 40563           |              | 227.8              | 7.6                     |                                 | CAREY       |
|                 | 5,974                     | 40572           |              | 236.7              | 16.5                    |                                 | ESTELLINE   |
| JY              |                           | 40573           |              | 237.0              | 16.8                    |                                 | PLAINS JCT. |
|                 | 7,528                     | 40586           |              | 251.9              | 31.7                    | SI                              | MEMPHIS     |
|                 | 8,340                     | 40599           |              | 268.9              | 48.7                    |                                 | HEDLEY      |
|                 | 3,589                     | 40606           |              | 271.1              | 50.9                    |                                 | LELIA LAKE  |
|                 | 8,400                     | 40613           |              | 275.8              | 55.6                    |                                 | CLARENDON   |
|                 | 7,562                     | 40623           |              | 288.6              | 68.4                    |                                 | ASHTOLA     |
|                 | 3,545                     | 40632           |              | 296.3              | 76.1                    |                                 | GOODNIGHT   |
|                 | 7,536                     | 40639           |              | 304.5              | 84.3                    | MA                              | MALDEN      |
|                 | 4,026                     | 40643           |              | 307.9              | 87.7                    |                                 | CLAUDE      |
|                 | 7,536                     | 40653           | 485          | 317.7              | 97.5                    |                                 | KASOTA      |
|                 | 3,535                     | 40656           |              | 320.5              | 100.3                   |                                 | WASHBURN    |
| Y               | 3,517                     | 40664           |              | 328.9              | 108.7                   |                                 | PULLMAN     |
| BKRTY           |                           | 40671           |              | 335.7              | 115.5                   | AR                              | AMARILLO    |
|                 | 8,992                     | 40682           |              | 347.8              | 127.1                   |                                 | GENTRY      |
|                 | 4,211                     | 40691           |              | 358.2              | 137.8                   |                                 | BODEN       |
|                 | 7,498                     | 40708           |              | 371.7              | 151.4                   | SA                              | TASCOSA     |
|                 | 7,587                     | 40723           |              | 388.1              | 167.8                   |                                 | CHANNING    |
|                 | 4,034                     | 40738           |              | 408.1              | 182.8                   |                                 | HARTLEY     |
| ITY             | 7,536                     | 40753           |              | 417.4              | 197.2                   | JC                              | DALHART     |
|                 | 7,562                     | 40770           |              | 434.5              | 214.6                   |                                 | GUY         |
|                 | 4,050                     | 40777           |              | 441.8              | 221.6                   |                                 | PERICO      |
| BKRY            |                           | 40788           |              | 452.9              | 232.7                   | Z                               | TEXLINE     |

FORT WORTH DIVN — 3rd Subdivn

| Rule 6(A) Signs | Length of Sidings in Feet | Station Numbers | Line Segment | Mile Post Location | Distance From Plains Jct. | BRANCH LINE STATIONS OFFICE CALLS |             |
|-----------------|---------------------------|-----------------|--------------|--------------------|---------------------------|-----------------------------------|-------------|
| JY              |                           | 40573           |              | 237.0              | 0.0                       |                                   | PLAINS JCT. |
|                 | 7,454                     | 88722           | 486          | 258.6              | 21.4                      |                                   | TAMPICO     |
|                 |                           | 88732           |              | 268.9              | 31.9                      |                                   | TURKEY      |
|                 | 6,739                     | 88742           |              | 279.2              | 42.2                      |                                   | QUITAQUE    |
| JY              |                           | 88769           |              | 306.4              | 69.8                      |                                   | STERLEY     |
|                 | 2,547                     | 89007           | 487          | 313.0              | 75.9                      |                                   | LOCKNEY     |
|                 | 2,557                     | 89026           |              | 332.7              | 95.6                      | PG                                | PETERSBURG  |
| U               | 2,541                     | 89044           |              | 349.6              | 112.6                     |                                   | KITALOU     |
| BKRTY           |                           | 89054           |              | 360.0              | 123.0                     | BU                                | LUBBOCK     |

FWD Radio Channel No. 1 in service on these Subdivisions.

**FORT WORTH DIVN — 5th Subdivn**

**FORT WORTH DIVN — 6th Subdivn 3**

WESTWARD ↓

| Rule 6(A) Signs | Length of Sidings in Feet | Station Numbers | Line Segment | Mile Post Location | Distance From Sterley | BRANCH LINE STATIONS OFFICE CALLS |
|-----------------|---------------------------|-----------------|--------------|--------------------|-----------------------|-----------------------------------|
| JY              |                           | 88769           | 486          | 306.4              | 0.0                   | STERLEY                           |
| BKR TY          |                           | 88787           |              | 324.8              | 17.9                  | CG PLAINVIEW                      |
|                 | 2,389                     | 88801           |              | 337.5              | 31.2                  | EDMONSON                          |
|                 | 2,568                     | 88815           |              | 351.6              | 45.2                  | HART                              |
| RTY             |                           | 88881           |              | 367.6              | 61.2                  | DM DIMMITT                        |
|                 |                           |                 |              |                    |                       |                                   |

↑ EASTWARD

WESTWARD ↓

| Rule 6(A) Signs | Length of Sidings in Feet | Station Numbers | Line Segment | Mile Post Location | Distance From Valley Jct. | BRANCH LINE STATIONS OFFICE CALLS |
|-----------------|---------------------------|-----------------|--------------|--------------------|---------------------------|-----------------------------------|
| J               |                           | 40458           | 490          | 0.0                | 0.0                       | VALLEY JCT.                       |
|                 | 1,522                     | 88227           |              | 27.8               | 26.7                      | DUNDEE                            |
|                 | 2,498                     | 88252           |              | 51.9               | 50.8                      | SEYMOUR                           |
|                 | 1,796                     | 88268           |              | 63.4               | 61.8                      | BOMARTON                          |
|                 | 1,045                     | 88271           |              | 70.5               | 68.9                      | GOREE                             |
|                 | 1,787                     | 88276           |              | 75.8               | 74.2                      | M MUNDAY                          |
|                 | 1,800                     | 88297           |              | 96.9               | 95.8                      | AK HASKELL                        |
| BKR TY          |                           | 88313           |              | 112.7              | 111.1                     | S STAMFORD                        |
| BKR TY          |                           | 88351           |              | 151.8              | 149.7                     | A ABILENE                         |
|                 |                           |                 |              |                    |                           |                                   |

FWD Radio Channel No.1 in service on these Subdivisions.

**INDUSTRIAL TRACKS AND OTHER TRACKS NOT SHOWN AS STATIONS IN TIME TABLE**

| Name                      | Location                      | Capacity Cars | Switch Opens | Name                           | Location                       | Capacity Cars | Switch Opens |
|---------------------------|-------------------------------|---------------|--------------|--------------------------------|--------------------------------|---------------|--------------|
| <b>First Subdivision</b>  |                               |               |              | <b>Fifth Subdivision—Cont.</b> |                                |               |              |
| 40350 Hicks               | 2.9 miles west of MP 11       | 8             | West         | 88798 Edmonson Coop            | 1.4 miles east of Edmonson     | 13            | West         |
| 40361 Rhome               | 6.4 miles west of Avondale    | 51            | Both         | 88808 Grisham                  | 7.2 miles west of Edmonson     | 14            | Both         |
| 40395 Sunset              | 4.2 miles east of Fruitland   | 7             | West         | 88813 Hilburn                  | 1.9 miles east of Hart         | 20            | West         |
| 40431 Henrietta           | 5.8 miles west of Dickworsham | 27            | West         | 88816 Custom Farm Supply       | 8.7 miles east of Dimmitt      | 5             | West         |
| 40490 Oklaunion           | 6.8 miles west of Harrold     | 12            | Both         | 88822 Roy                      | 8.1 miles east of Dimmitt      | 12            | Both         |
| 40496 Vernon Grain Inc.   | 3.3 miles east of Vernon      | 35            | Both         | 88827 Red Barn                 | 5.2 miles east of Dimmitt      | 4             | West         |
|                           |                               |               |              | 88829 Goodpasture              | 2.2 miles east of Dimmitt      | 18            | West         |
| <b>Second Subdivision</b> |                               |               |              | <b>Sixth Subdivision</b>       |                                |               |              |
| 40559 Moyer               | 3.9 miles west of Childress   | 90            | East         | 88214 Holliday                 | 12.6 miles west of Valley Jct. | 21            | Both         |
| 40761 Bolin               | 3.2 miles west of Dalhart     | 15            | Both         | 88295 Wehnert                  | 9.2 miles west of Munday       | 34            | Both         |
| 40767 Ware                | 3.7 miles east of Guy         | 16            | East         | 88327 Anson                    | 14.1 miles west of Stamford    | 30            | East         |
| <b>Third Subdivision</b>  |                               |               |              |                                |                                |               |              |
| 88748 Edgin               | 5.7 miles west of Quitaque    | 6             | East         | 88341 Fina                     | 10.0 miles east of Abilene     | 21            | East         |
| 88764 South Plains        | 5.1 miles east of Sterley     | 45            | Both         | 88343 North Abilene            | 8.3 miles east of Abilene      | 60            | Both         |
| 89017 Barwise             | 10.4 miles west of Lockney    | 39            | East         | 88345 Lanus                    | 5.9 miles east of Abilene      | 15            | East         |
| 89036 Heckville           | 7.8 miles east of Kitalou     | 11            | West         |                                |                                |               |              |
| <b>Fifth Subdivision</b>  |                               |               |              |                                |                                |               |              |
| 88777 Cereal              | 7.6 miles west of Sterley     | 16            | East         |                                |                                |               |              |
| 88790 Occidental Chemical | 3.7 miles west of Plainview   | 23            | Both         |                                |                                |               |              |
| 88791 Wasson              | 3.8 miles west of Plainview   | 15            | East         |                                |                                |               |              |
| 88795 Boone               | 7.4 miles west of Plainview   | 6             | West         |                                |                                |               |              |
| 88796 Wright              | 3.4 miles west of Plainview   | 10            | Both         |                                |                                |               |              |

**ALL SUBDIVISIONS**

**1. Speed Restrictions                      Maximum Speeds Permitted**

All speeds are subject to modification by speed restrictions indicated under Individual Subdivision Special Instructions.

Passenger trains will be governed by freight train speeds if passenger train speed is not specified under Individual Subdivision Special Instructions.

Freight trains up to 100 Tons/OB\* .....49 MPH.  
 Freight trains over 100 Tons/OB\* .....40 MPH.

\*Tons per operative brake (Tons/OB) is defined as the gross trailing tonnage of the train divided by the total number of cars having operative brakes.

To determine if train exceeds 100 tons per operative brake, add two zeros to the number of cars having operative brakes. If train has greater trailing tonnage than the resulting figure, train exceeds 100 tons per operative brake. Example 85 cars with operative brakes plus two zeros equal 8500. An 85 cars train with 9182 tons would exceed 8500 and hence would exceed 100 tons per operative brake.

Unless otherwise provided—

Loaded unit ore, ballast and potash trains .....40 MPH.  
 Loaded unit coal trains .....40 MPH.  
 Empty unit coal trains .....49 MPH.  
 Engines running light or with caboose only .....49 MPH.

All trains and engines through turnouts, except as specified under Individual Subdivision Special Instructions or where fixed signals indicate otherwise .....10 MPH.

| Equipment—   | Main Line | Branch Line |
|--|-----------|-------------|
| Ore cars .....   | 40 MPH.   | 21 MPH.     |
| Scale test cars .....  | 35 MPH.   | 21 MPH.     |
| Air dump cars (loaded) .....   | 35 MPH.   | 21 MPH.     |
| Wedge plow or dozer (dead in tow) ..   | 35 MPH.   | 21 MPH.     |
| Rotary plow, wrecking derrick, loco crane, pile driver, clamshell, shovel, Jordan Spreader ..... | 30 MPH.   | 13 MPH.     |
| Ribbon rail cars (loaded) .....  | 35 MPH.   | 21 MPH.     |

Except on Main Lines as shown in timetables, diesel engines, wrecking cranes and other types of heavy work equipment must not be operated on any subdivision unless authorized by Chief Dispatcher and Roadmaster or covered by specific instructions.

**Maximum Speed Diesel Units Dead In Tow—**

Switcher units with friction bearings .....35 MPH.  
 Switcher units with roller bearings .....40 MPH.  
 Road switcher and other units .....49 MPH.

**1A. Control of Harmonic Rocking**

Under certain conditions, operation of trains between 13 and 21 miles per hour can cause derailments due to harmonic rocking of cars. Where specified by Individual Subdivision Special Instructions or bulletin, the following restrictions will apply:

Trains other than unit coal or ore trains consisting entirely of empty equipment, which cannot maintain speed of 21 miles per hour, must reduce speed not to exceed 13 miles per hour until movement can again exceed 21 miles per hour.

**2. Restrictions on Diesel Units—**

The number of diesel units coupled together in train operation, either working, idle, or dead in tow, must not exceed

seven. When the operating diesel units on head end of train exceed 18 powered axles, Individual Subdivision Special Instructions or bulletin must be referred to in determining if any restrictions are in effect governing trailing tonnage. Maximum tonnages expressed in Individual Subdivision Special Instructions for head end power are extreme limits under ideal conditions and superintendents will establish lower limits as required.

In the event diesel units in excess of the above restrictions are to be handled dead in train, such units must be placed not less than 5 cars or more than 15 cars behind the lead units.

Diesel units not equipped with alignment control couplers when dead in tow in freight trains must be handled singly, not in groups, and not less than 5 cars or more than 15 cars from the road engine.

Exception—Trains of 5 cars or less may handle not more than 3 such diesel units coupled dead in tow to the working consist.

When an engine consist of more than 3 units in service includes diesel unit or units not equipped with alignment control couplers, only the 3 rear units will be allowed to work power when the train is to make a back-up movement. Other units must be isolated.

**Diesel units NOT equipped with alignment control couplers: All switcher units**

Road and road switcher diesel units: 256-259, 405-406, 600-995, 1350-1355, 1357-1365, 1524-1576, 1578-1585, 1587-1601, 1603-1612, 1614, 1616-1619, 1621, 1700-1775, 1777-1875, 1877-1936, 1938-1958, 1960-1966, 1968-1998, 4000-4197, 6000-6255, 9900-9925.  
 FW&D 700, 701, 703.  
 C&S 150-842.

**3. Manned Helper Operations—**

Locomotives not equipped with alignment control couplers (See item 2) must not be operated in manned helper consists unless equipped with bolster stops.

The following units, not equipped with alignment control couplers, are equipped with bolster stops:

602-644, 653, 675, 682, 702, 704-707, 710-714, 720, 724-735, 738-785, 788, 794-819, 824-825, 827-829, 831-847, 986-989, 1353, 1355, 1357-1360, 1362, 1365, 1524-1542, 1545, 1551-1552, 1555-1563, 1569-1571, 1573, 1575-1576, 1578, 1580-1584, 1587, 1590, 1592-1600, 1610, 1614, 1616-1618, 1621-1622, 1626-1643, 1700-1775, 1777-1799, 1802-1812, 1814, 1816-1817, 1819-1820, 1822, 1824-1833, 1835-1866, 1868-1875, 1877-1882, 1887-1889, 1892, 1894-1901, 1903-1904, 1906, 1908-1909, 1914-1926, 1928, 1930, 1932-1933, 1941-1952, 1955-1958, 1960-1965, 1971, 1975, 1978, 1990-1997.  
 FW&D 700, 701, 703.

Exception—Single, non-equipped locomotives may be operated between locomotives equipped with alignment control couplers or bolster stops.

Locomotive units including trailing unit of head end consists, in manned helper operation, which will be coupled to cars must be equipped with alignment control couplers.

Where cars listed in first sentence of item 4 are handled at rear of train, manned helper must be cut in ahead of such cars. When helper is cut in ahead of such cars, or immediately ahead of the caboose, the helper will be considered as operating at the rear of the train.

Unless otherwise provided in Individual Subdivision Special Instructions:

Helpers of 12 powered axles or less, may be operated at rear of train ahead of or behind caboose, but must not be

used on rear of trains handling empty equipment 80 feet and longer unless Individual Subdivision Special Instructions or bulletin are in effect to indicate the safe buffer between such cars and rear end helper for that subdivision.

Helpers will not exceed 24 powered axles. Head end consists in helper trains will not exceed 24 powered axles.

Head end consists in helper trains which are unit coal trains, equipped entirely with Type E or F couplers cast in Grade E steel, may have up to 36 powered axles. Helpers up to 24 powered axles may shove on the rear of such trains except that helpers with twenty four powered axles must be cut in ahead of caboose.

Note—The following 100-ton coal cars are not equipped with Grade E steel, Type E or F couplers;

- BN 513900-513999 (GN 70400-70499)
- BN 514100-514199 (NP 73600-73699)
- BN 514300-514499 (CBQ 160000-160199)
- BN 520000-520599 (NP 73000-73599)
- BN 520658-520699 (NP 74958-74999)
- BN 522000-522699
- BN 523000-523399
- BN 524000-525299 (CBQ 160200-161499)
- BN 530000-530004
- BN 540000-540210 (CBQ 163000-163209)

Helpers of more than 12 powered axles must be cut into train.

Dispatcher will advise conductor of tonnage rating of helper so that conductor can determine proper location in train, arranging that tonnage trailing the helper approximately equals combined tonnage rating of helper locomotives.

When restrictions governing trailing tonnage with head end power are provided by Individual Subdivision Special Instructions or bulletin, helper may be operated on head end, providing the combined head end and helper units do not exceed seven.

Exceptions to Item 3—Helpers of six powered axles or less are not restricted by any of the provisions of this item.

**3A. Diesel Unit Weights**

This chart is to be used in conjunction with any weight restrictions in items 1 or 2, Individual Subdivisions.

| Group | Types   | Unit Numbers   | Weight (900) |
|-------|---|--|--------------|
| A     | SW-1  | 70, 80-97, SLSF 10.  | 198-201      |
| B     | SW-1<br>F-7<br>F-9<br>NW-5<br>GP-5<br>GP-7                                      | 102.<br>602-676, 702, 717, 720, 724, 725, 732-761.<br>847-853.<br>985-993.<br>1350-1365.<br>1558-1556, 1558-1561, 1565, 1566, 1569, 1570,<br>1572, 1575, 1576, 1580, 1582, 1586, 1588,<br>1590, 1592, 1596, 1597, 1603, 1606, 1610,<br>1612, 1614, 1616, 1619, 1621, 1623,<br>FWD 700-701, FWD 703.                  | 216-251      |
|       | GP-9  | 1723-1760, 1808-1850, 1834, 1885, 1887-1889,<br>1891, 1902-1953, 1960-1964, 1966-1969,<br>1971-1972, 1979, 1980.   |              |
|       | GP-18<br>ARS-11   | 1990-1997.<br>4180-4197.   |              |
| C     | SW-8<br>SW-900<br>SW-12<br>SW-7<br>SW-9<br>SW-10<br>NW-2<br>F-9<br>ARS-3<br>F-7 | 98, 99, 101.<br>100.<br>106, 162-166, 170-250, 256-259.<br>105-134, 137-142, 75-79, SLSF 300-304.<br>146-151, 167-169, 250-259, SLSF 305-314.<br>375-449, 574-585.<br>488-499, 517-573, 586-595, 405-410-425<br>SLSF 250-265, C&S 150-153.<br>766-845.<br>4056, 4064, 4068.<br>682, 684, 703-706, 708-716, 718, 722. | 233-251      |

|   |   |   |         |
|---|---|---|---------|
| D | NW-12<br>SW-7<br>NW-2<br>GP-7   | 1, 5, 14, 19,<br>135, 136, 143-145.<br>406, 451-487, 500-516.<br>1524-1552, 1557, 1562-1564, 1567, 1568,<br>1571, 1573, 1574, 1578, 1579, 1581, 1584,<br>1586, 1587, 1589, 1591, 1592-1595,<br>1598-1602, 1604, 1605, 1607, 1608, 1611,<br>1618, 1615, 1617, 1618, 1620, 1622, 1626-1643.<br>1761-1807, 1886, 1890, 1959, 1965, 1970.<br>C&S 154. | 233-275 |
|   | GP-9<br>SW-7<br>MP-15   | 4000-4004, SLSF 361-365.  |         |
| E | SW-1500<br>SW-15<br>GP-15-1<br>GP-10<br>GP-9<br>GP-20<br>GP-38  | 20-65, SLSF 315-360.<br>300-324.<br>1375-1399, SLSF 100-124.<br>1400-1438.<br>1700-1722, 1831-1883, 1892-1901, 1978-1978.<br>2001-2071.<br>2072-2077, 2110-2138, SLSF 633-650,<br>SLSF 652-662.   | 255-276 |
|   | GP-38-2   | 2078-2109, 2150-2154, 2255-2369, SLSF 400-478,<br>SLSF 663-699.   |         |
|   | GP-30<br>GP-35<br>GP-40<br>A-415<br>A-424<br>A-425<br>U-25B<br>U-28B<br>U-30B<br>F-7<br>B-30-7<br>GP-40-2 | 2200-2254.<br>2500-2545, 2550-2582, SLSF 700-732.<br>3000-3039.<br>4010, 4011.<br>4240-4246.<br>4252-4264.<br>5400-5429, 5210-5233, SLSF 808-831.<br>5450-5465.<br>5470-5484, 5770-5799, SLSF 832-862.<br>707, 726.<br>5485-5492, SLSF 863-870.<br>3040-3064, SLSF 750-774.   |         |
| F | SD-7  | 6048-6059.  | 300     |
| G | SD-7<br>SD-9  | 6023-6047, 6070-6089.<br>6127-6206.   | 316-326 |
| H | SD-7<br>SD-9<br>SD-24<br>E-9  | 6000-6022.<br>6100-6126.<br>6240-6255.<br>9900-9925.  | 330-347 |
| I | A-636<br>C-30-7<br>U-23C<br>U-30C<br>U-25C<br>U-28C<br>U-33C<br>SD-40<br>SD-40-2                          | 4360-4369.<br>5000-5126, 5500-5599.<br>5200-5208.<br>5300-5394, 5800-5944.<br>5600-5641.<br>5650-5677.<br>5700-5765.<br>6300-6324, 6394-6399.<br>6325-6334, 6348-6385, 6700-8161, 6840-6847.<br>C&S 6850, C&S 6950.<br>SLSF 950-957.  | 370-421 |
|   | SD-45<br>F-45<br>SD-38-2  | 6400-6599, 6650-6696, SLSF 900-948.<br>6600-6645.<br>6260-6263.   |         |

**4. Restrictions on Placing Cars in trains—**

Following equipment, loaded or empty, must be on rear of trains except in work trains or when otherwise provided by authority of Chief Dispatcher:

- Outfit cars
- Scale test cars (next ahead of caboose)
- Pile drivers
- Locomotive cranes
- Rotary snowplows, wedge plows, dozers
- Jordan spreaders
- Rear end only cars
- FW&D 70621 through FW&D 76991, Peek-a-boo rail and tie cars
- FWD tank cars 15000 series, (next ahead of caboose)
- CBQ 130000 through 130049 and BN 974000 through 974049 must be handled within 10 cars of caboose.

**Handling 80 Foot or Longer Cars—**

During either throttling or braking trailing tonnage may cause lateral force sufficient for derailment, where cars 80 feet or longer are coupled to cars 50 feet or shorter, when grade and curvature exceed certain limitations. To avoid creating such conditions, trains of 8,000 or greater trailing tons must handle empty cars 80 feet or longer in the rear 8,000 tons, unless otherwise provided in Individual Subdivision Special Instructions.

Where the total tonnage of cars 80 feet or longer is so large that it is impossible to comply with Individual Subdivision

Special Instructions, the train consist must instead be so arranged that all cars less than 80 feet are handled in the required rear tonnage, thus placing all long-car to short-car couplings in the safe tonnage area.

In applying those limits, the following 80 feet or longer loaded cars must be regarded the same as an 80 feet or longer empty car:

Cars weighing less than 50 tons, gross weight

Flat cars with one loaded trailer

Flat cars with empty trailers

Flat cars with either loaded or empty containers, unless the car is designated with a letter "Q" in the YHC column of the wheel report.

Locations where other restrictions are in effect are listed under Individual Subdivision Special Instructions.

EXCEPTION: Trains consisting entirely of cars 80 feet and longer, except caboose, are not restricted by this provision; however, any helper locomotive at rear of train must be cut in ahead of caboose on such trains.

#### 5. Repeater Relay Air Car Operation—

When repeater relay air car is to be operated in train, it must be placed approximately in the middle of the train.

#### 6. Hazardous Materials—

Holders of the Consolidated Code of Operating Rules must have BN Form 15784, "Handling Placarded Cars In Railroad Transportation," in their possession and be familiar with its contents.

Note: For complete information on these regulations, consult tariff No. BOE-6000 or B. E. Pamphlet 20.

All loaded tank cars placarded "flammable gas" or "non-flammable gas" must not be cut off while in motion and no car moving under its own momentum shall be allowed to strike these cars, nor shall such cars be coupled to with more force than is necessary to complete the coupling. Employees must be informed of the presence of these cars and instructed to handle them in accordance with the above requirements.

Trains handling loaded placarded tank cars of the 112A or 114A types must not exceed 49 MPH. Where maximum authorized speed is 40 MPH or less, such trains must not exceed 30 MPH observing all other speed restrictions.

112A and 114A tank cars will be identified on wheel reports and other computer generated documents by the letters (TR) in the first two positions of the car kind column.

When derailment or incident occurs involving hazardous materials:

- a. Except to effect rescue, keep everyone, including employees, at a safe distance pending determination of chemicals involved.
- b. Notify train dispatcher (yardmaster in terminal areas) advising portion of train or cars involved. From waybills, consist or other data source, determine appropriate precautions in the event there has been a product release.
- c. Inspection of train or cars should be undertaken with caution. If a release of hazardous material is evident, the area must not be entered except by person(s) with proper protective equipment.
- d. If flammable liquids or gases are involved and personal safety allows, remove or extinguish all sources of ignition in the area.
- e. When personal safety allows, take necessary action to prevent spilled material from entering lakes, streams or sewers, if possible.

- f. Remain at the scene, in close contact with the train dispatcher (yardmaster in terminals) and be readily accessible to advise emergency response forces of suspected dangers, contents and condition of cars. Furnish them all emergency response information available. This position should be maintained until relieved by an officer on the scene or emergency is corrected.

NOTE: Computer generated data does not indicate hazardous materials in TOFC/COFC shipments, certain mixed loads or residue remaining in empty tank cars. Such cars in a derailment may be as dangerous as other shipments. Information for such cars must be obtained from the waybill.

#### 7. Storage of Cars Within Yard Limits Non-ABS Territory—

Within yard limits in non-ABS territory, the main track must not be used as a storage track except in case of emergency. When it becomes necessary to leave cars on main track in such territory, they must be protected by train order. This does not modify the requirement to move at yard speed as required in Rule 93.

#### 8. Spring Switches—

Instructions for operation of spring switches are posted at or near the spring switch and must be complied with. Spring switches are identified by yellow sign with black letter "S" located on or near spring switch.

All spring switches are equipped with facing point locks except when identified as not having a facing point lock in the Subdivision Special Instructions.

#### 9. Commodities insulating track in CTC and ABS—

Employees should be alert for insulating commodities such as clay, chips, oil, etc., getting on top of rails. This condition could possibly insulate the track, and cause loss of train shunt. Such conditions should be promptly reported and trains protected per rules while in CTC and ABS territory.

#### 10. Rules Changes and Modifications—

##### BN Safety Rule 94—

BN Safety Rule 94 is cancelled and the following rule applies:

Train, engine and yard service employees must not occupy the roof of a freight car or caboose under any circumstances. Other employees whose duties require them to occupy the roof of a freight car or caboose may do so only when equipment is standing.

##### BN Safety Rule 144—

BN Safety Rule 144 is cancelled and new Safety Rules 144(A) and 144(B) are in effect and read as follows:

144(A) Manual Uncoupling of air hose on passenger equipment, between locomotives, yard air lines or when changing an air hose or air hose gasket must be performed as follows:

- a) Have both angle cocks closed. When disconnecting yard air line, valve must be closed.
- b) Take firm grip on hose coupling and apply upward pressure.
- c) Break connection gradually to reduce pressure in hose.
- d) Turn face away from air hose connecting as pressure is released.
- e) When practicable, keep one foot outside of rail.

144(B) When air hoses are not manually uncoupled and separation is to be made, the following applies:

- a) Close angle cock on locomotive or on car toward locomotive when cut is made between cars.

- b) Operate uncoupling lever and signal for movement.  
 c) Allow air hoses to part keeping all parts of body fully in the clear.

**BN Safety Rule 217—**

BN Safety Rule 217 has been modified to include a second paragraph which reads:

“When necessary to work under cars in trains where inadvertent movement of the car being worked on could occur, sufficient hand brakes must be applied adjacent to the car to prevent such movement.”

**BN Safety Rule 653 and Maintenance of Way Rule 889—**  
 BN Safety Rule 653 is cancelled and the following new BN Safety Rule 653 is in effect, also, the following is added to Maintenance of Way Rule 889:

Employes performing maintenance or repair work to vehicular crossing at grade or who are exposed to contact with vehicular traffic during work shift, must wear a high visibility vest during time so engaged in such work.

**11. Air Brake and Train Handling Rules—**

BN Air Brake and Train Handling Rules, Form 15338 8-1-79, are in effect. Employees whose duties are in any way affected by these rules must have a copy of this book available while on duty.

**12. Automatic Cab Signals—**

Cab signals on any engine unit, so equipped, must not be used on any other portion of Burlington Northern except on suburban equipment only on Chicago Division, First Subdivision.

13. Yard cabooses No. 63, 92, 93, 95, and 99 are restricted to yard service only, and Maximum speed at which these cabooses are to be moved is 15 MPH.

14. Loaded unit coal trains are restricted to the main line and will not take siding nor be operated through yard tracks or back tracks except as otherwise provided below.

Individual loaded coal cars or block of loaded coal cars which may have to be set out on line must be walked into and out of set out track and in no case shoved past the clear point. Loaded coal trains which require doubling over in a terminal will be handled at a speed not exceeding 5 miles per hour and the crew will observe the double over carefully from positions which will allow them to immediately stop the train if trouble develops. Loaded coal train will not be operated through the Cotton Belt main line between North Yard and T&P Junction. Loaded coal trains may be operated through sidings at:

Texline (Old Main Line), Guy, Dalhart, Channing, Tascosa, Gentry, Amarillo (New tracks west of Lakeside Drive), Kasota, Malden, Clarendon, Hedley, Memphis, and other sidings in emergency when authorized by Chief Dispatcher and be governed by his instructions.

**15. Operation of Unit Coal Train—**

When voice communication between the head end and rear is not available and it is necessary to stop train from the caboose, the caboose valve must be moved directly to emergency position only and left there until train stops. No brake application will be made from the caboose except full emergency.

When making a cut at any location in a coal train, no train line angle cock may be turned until all air from the brake pipe is exhausted at the automatic brake valve and the engineer gives a signal of one (1) short blast of the whistle.

The angle cock on the rear portion of the train must be left in the full open position.

Any premature closing of the angle cock before the air is exhausted will cause a wave action in the train line and will release all brakes on the rear portion of the train when separation is made.

16. All switching movements over road crossings, including those crossings protected with lights and bells, will be made cautiously and where necessary under flag protection in order to protect against crossing accidents.

No cars will be shoved blind across road crossings and cars must not be dropped over road crossings without flag protection being provided in advance of movements.

Mechanical Department employees will not hostile engines over public road crossings unless flag protection is provided in advance of movement.

17. Rear Trainmen will inspect to the rear of their train at least once each mile, upon leaving limits of slow orders, after entering or leaving turnouts, and upon leaving stations where switching was performed, to determine if anything is derailed or dragging in your train.

18. Reference to Notification to Operating Personnel in Connection with the Movement of FRA Defective Cars for Repair. Your attention is directed to Paragraph (a) (2) of Section 215. Movement of defective cars for repair, Railroad Freight Car Safety Standards, which provides that a railroad freight car which has any components defective under FRA Regulations may be moved for repair only after:

- (a) “The person in charge of the train in which the car is to be moved is notified in writing and informs all other crew members of the presence of the defective car and the maximum speed and other restrictions determined under paragraph (a) (ii) of this section.”

The Operations and Maintenance Department of the AAR is in process of developing uniform recommended procedures, which may include the movement of such defective cars on a waybill detailing the particular defect(s) and operating restrictions as shown on the cards attached to the car, as well as a general notice to the crew members handling such cars.

19. Dimensional shipments must not be moved until clearance instructions have been issued by the office of the BN General Superintendent of Transportation, C. E. Able. The Chief Train Dispatcher will supervise the movement of high-wide loads and excessive weight shipments.

Published Clearance for dimensional shipments on FW&D are as follows:

1st and 2nd Subdivisions

Fort Worth-Wichita

Falls 12'0" wide at 18'9" ATR down to 2'3" ATR

Wichita Falls-Quanah

Via Westward MT

Wichita

Falls 12'0" wide at 17'0" ATR down to 2'0" ATR

Via Eastward MT

Wichita

Falls 12'0" wide at 18'9" ATR down to 2'0" ATR

Quanah-

Amarillo 12'0" wide at 20'0" ATR down to 2'0" ATR

Amarillo-

Texline 12'0" wide at 18'6" ATR down to 3'0" ATR

3rd and 5th

Subdivisions 12'0" wide at 18'3" ATR down to 2'0" ATR

6th Subdivision 12'0" wide at 20'0" ATR down to 2'0" ATR

4th Subdivision 12'0" wide at 20'0" ATR down to 3'0" ATR

Conductors and Yard Foremen, in making up trains, must notify Yardmasters of dimensional shipments which exceed Published Clearance that are included. Yardmasters, when on duty, Footboard Yardmasters or Conductors will notify the Train Dispatcher to enable the dispatcher to protect by train order per Item 14 Paragraph n of the Train Dispatchers Manual prior to departure of the train from the station where the dimensional shipment is entrained.

This notification and train order protection is required at crew change points on run through trains.

**FORT WORTH DIVISION  
(TP Jct. - Childress)  
FIRST SUBDIVISION**

| 1. Speed Restrictions                         | Maximum Speeds Permitted |
|---|--------------------------|
| T&P Jct and Childress .....                   | 40 MPH.                  |
| Loaded Unit Coal Trains .....                 | 30 MPH.                  |
| Empty Unit Coal Trains .....                  | 40 MPH.                  |
| T&P Jct and MP 8.....                         | 13 MPH.                  |
| Saginaw—ATSF Crossing .....                   | 10 MPH.                  |
| Bowie—Mason Street Crossing .....             | 30 MPH.                  |
| At Wichita Falls between:                     |                          |
| MP 113 and Seventh Street .....               | 30 MPH.                  |
| Over Seventh Street Crossing .....            | 8 MPH.                   |
| Seventh Street and MP 116 .....               | 30 MPH.                  |
| MP 116 and MP 117.6 .....                     | 35 MPH.                  |
| Iowa Park—Between MP 124.1 and MP 126.1.....  | 13 MPH.                  |
| Electra—Between MP 139.6 and MP 140.7 .....   | 30 MPH.                  |
| Vernon—Between MP 162.7 and MP 164.4 .....    | 20 MPH.                  |
| Quanah—Over Main Street Crossing .....        | 30 MPH.                  |
| Childress—Between MP 219.9 and MP 222.3 ..... | 25 MPH.                  |

**2. Bridge, Engine and Heavy Car Restrictions—**

Cars heavier than the following not permitted without authority of Superintendent:

|                         |              |
|-------------------------|--------------|
| Over 40 ft. long .....  | 263,000 lbs. |
| Under 40 ft. long ..... | 220,000 lbs. |

At Wichita Falls—Engines heavier than Group H must not be operated on the following tracks:

Old WF&S freight house beyond inside switch.  
Moore Richolt Spur beyond 13th Street.

**3. Train Register Exceptions—**

MK&T Trains will register at FW&D North Yard and FW&D Wichita Falls when instructed to do so.

**4. Clearance Provisions and Exceptions Rule 83(B)—**

Wichita Falls—Trains must receive clearance.  
Saginaw—Westward Trains must receive clearance.  
C&E of Westward MK&T Trains originating MK&T Ney Yard operating via FW&D for Wichita Falls must receive FW&D clearance at MK&T Ney Yard and Saginaw.  
C&E of Eastward Trains originating at North Yard enroute to OKT must receive FW&D clearance in addition to OKT clearance at FW&D North Yard.  
Rule 83(B) Does not apply at Valley Junction. At intermedi-

ate locations in CTC Territory Rule 83(B) will not apply when so authorized by Train Dispatcher.

5. Rule 99, when flagging is required distance will be one mile.

**6. Spring Switches—**

East end of siding Dickworsham, West end of siding Saginaw, and at MP 5.3 North Yard leading to West end Stauffer Chemical track.

A Lunar light displayed on the spring switch light indicates that spring switch is in normal operating condition. If a red light is displayed on the spring switch light, be governed by Rule 104(H). In CTC territory when a train has been stopped by a "Stop and Proceed" indication displayed on a signal governing facing point movement over a spring switch, in addition to compliance with Rule 104(H), a member of the train crew must communicate with the control operator before train passes spring switch. When trailing movement through spring switch is not authorized by signal indication, spring switch must be operated by hand. When switching movements are made over spring switch, Rule 276 will apply as to permission, time and working limits, and notification to Engineer.

In CTC territory if signal indicates Stop 501 (L) governing movement over dual control switch one end of siding and such signal also governs movement over spring switch at the opposite end of siding, in addition to complying with Rule 275 for movement over dual control switch, and train is to trail over spring switch on the main track, a member of crew must examine switch and know that points fit.

Spring switches at following locations not equipped with facing point locks: MP 5.3 North Yard.

**7. Automatic Interlocking not Indicated at Station—**

Quanah, MP 191.7 and Acme, MP 196.9 are automatic interlocking and signals are a part of Centralized Traffic Control system. Rules 269, 605(A), 613 and 614 are in effect.

**8. Manual Interlocking not Indicated at Station—**

|                               |                            |
|-------------------------------|----------------------------|
| St.L.SW Crossing Jct. ....    | 3.2 Miles West of T&P Jct. |
| Ft.W. Belt-OKT Crossing ..... | 3.1 Miles West of T&P Jct. |
| St.L.&S.F. Crossing .....     | 2.8 Miles West of T&P Jct. |

Chillicothe, MP 179 interlocking is remotely controlled from Fort Worth and signals are a part of Centralized Traffic Control system. Rules 269, 275, and 605 (A) are in effect.

9. Rule 93 in effect between T&P Jct. and MP 11 authority for movement will be issued by yardmaster.

Westward trains stopped at block signal at MP 10.7 must obtain authority for continued movement from train dispatcher as well as yardmaster as this signal governs block extending beyond yard limits.

10. At Wichita Falls—Trains or engines passing over North Beverly Drive crossing, MP 116.9, on Sunshine Yard Lead must flag the crossing as the signal will not operate except when engine or cars are upon highway crossing.

Trains or Engines operating over Seventh Street Crossing Wichita Falls must observe crossing signals in operation for approaching crossing. In the event Signals fail to operate for approaching movement, leading wheels of movement must occupy island section, but stopping short of street crossing, observing signals in operation before obstructing crossing. "Island Section" is a section of track over the crossing, the outer limits of which is approximately 50 feet each side of crossing and marked with yellow paint.



At Valley Jct—Dual Controlled Switch MP 118.4 does not meet requirements as per Paragraph 4 of Rule 275 Consolidated Code of Operating Rules. Switch must be left in the hand throw position until complete movement has been made over the switch.

11. Close Clearance—

Wichita Falls—Close side clearances at Berend Bros. Elevator just west of Wichita River.

Electra—National Tank Co. shed will not clear man on side of car.

Vernon—Employees must not ride the side of cars or engines while switching former St.L.&S.F. team tracks, former St.L.&S.F. house track and tracks serving Waples-Platter Company.

Quanah—Clearance to wires on East Elevator Track No. 2 is 18 feet from top of rail.

Childress—Compress track will not clear man on side of car.

FORT WORTH DIVISION  
(Childress - Texline)

SECOND SUBDIVISION

| 1. Speed Restrictions—  | Maximum Speeds Permitted. |
|---|---------------------------|
| Amarillo and Texline .....  | 49 MPH.                   |
| Loaded Unit Coal Trains Texline and Amarillo .....                                  | 40 MPH.                   |
| Empty Unit Coal Trains Texline and Amarillo .....                                   | 49 MPH.                   |
| Childress and Amarillo .....  | 40 MPH.                   |
| Loaded Unit Coal Trains Childress and Amarillo..                                    | 30 MPH.                   |
| Empty Unit Coal Trains Childress and Amarillo....                                   | 40 MPH.                   |
| Childress—Between MP 219.9 and MP 222.3 .....                                       | 25 MPH.                   |
| Bridge 238.08 .....   | 15 MPH.                   |
| At Amarillo Between:  |                           |
| MP 334.1 and MP 335.8 .....   | 21 MPH.                   |
| MP 335.8 and MP 336.7 .....   | 13 MPH.                   |
| MP 336.7 and MP 338.0 .....   | 30 MPH.                   |
| At Amarillo over Inspection Pit on East end of Engine Track .....                   | 5 MPH.                    |
| At Amarillo on Producers Grain Elevator Lead between East Switch and Elevator ..... | 5 MPH.                    |
| Washburn Elevator Track .....   | 3 MPH.                    |
| Dalhart—Over SSW Crossing .....   | 21 MPH.                   |

2. Bridge, Engine, Heavy and Long Car Restrictions—

Cars heavier than the following not permitted without authority of Superintendent:

|                         |              |
|-------------------------|--------------|
| Over 40 ft. long .....  | 263,000 lbs. |
| Under 40 ft. long ..... | 220,000 lbs. |

Between Texline and Amarillo—Handling eighty (80) feet or longer cars—See Special Instructions all Subdivisions Items 3 and 4.

3. Train Register Exceptions—None.

4. Clearance Provisions and Exceptions—Rule 83(B)—

Amarillo—Trains must receive clearance.

At Estelline and Carey, in CTC territory, Rule 83(B) will not apply when so authorized by Train Dispatcher. Trains departing stations on Second Subdivision enroute to Third

Subdivision must secure clearance at the initial station addressed C&E\_\_\_\_\_ at Plains Jct.

5. Rule 99, when flagging is required distance will be one and one-fourth miles.

6. Manual Interlocking—

ATSF Crossing, 1 Mile East of Amarillo.

Between Pullman and Amarillo industry track leads off yard track at MP 331.1 CRI&P crossing on this track protected by automatic electrically locked gate, normally set against FW&D movements. Trains and engines using this track must remain clear of "STOP" signs and operate the crossing gate in accordance with instructions posted in the case located at the crossing.

Dalhart—Train or Engine will be governed by Interlocking Rules and authority for movement is authorized by Rule 606C of the Consolidated Code of Operating Rules.

7. Spring Switches—

A lunar light displayed on the spring switch light indicates that spring switch is in normal operating condition. If a red light is displayed on the spring switch light, be governed by Rule 104(H).

In CTC territory when a train has been stopped by a "Stop and Proceed" indication displayed on a signal governing facing point movement over a spring switch, in addition to compliance with Rule 104(H), a member of the train crew must communicate with the control operator before train passes spring switch. When trailing movement through spring switch is not authorized by signal indication, spring switch must be operated by hand. When switching movements are made over spring switch, Rule 276 will apply as to permission, time and working limits, and notification to Engineer.

In CTC territory if signal indicates Stop 501 (L) governing movement over dual control switch one end of siding and such signal also governs movement over spring switch at the opposite end of siding, in addition to complying with Rule 275 for movement over dual control switch, and train is to trail over spring switch on the main track, a member of crew must examine switch and know that points fit.

8. Rule 93 is in effect between Amarillo and Pullman. Authority for movement will be authorized by Yardmaster.

9. Close Clearance—

Claude—Nelson Elevator will not clear man on side of car.

Childress—Compress track will not clear man on side of car.

FORT WORTH DIVISION  
(Plains Jct. - Lubbock)

THIRD SUBDIVISION

| 1. Speed Restrictions—              | Maximum Speeds Permitted |
|-------------------------------------|--------------------------|
| Plains Jct. and Lubbock .....       | 35 MPH.                  |
| MP 237 to MP 298 .....              | 25 MPH.                  |
| MP 306 to MP 314 .....              | 25 MPH.                  |
| MP 350 to Lubbock .....             | 25 MPH.                  |
| Bridge 282.03 .....                 | 10 MPH.                  |
| Sterley—MP 306.8 .....              | 13 MPH.                  |
| Between MP 357 and MP 360 .....     | 13 MPH.                  |
| Kitalou—On Airport Spur Track ..... | 10 MPH.                  |



**4. Clearance Provisions and Exceptions Rule 83(B)—**

Childress and Stamford—Trains must receive clearance.

**5. Fourth and Sixth Subdivision**

Rule 99, when flagging is required distance will be one mile.

**6. Yard Limits—**

Tracks between Stamford and Abilene, Childress and Wellington, will be operated as one yard.

**7. Close Clearance—**

**Goree**—Close side clearance East Elevator.

**Abilene**—Cars that may be on MOP industry tracks will not clear man on side of car spotted at extreme west end of spur track serving Abilene Plumbing Company. Ben E. Keith Company building on utility track will not clear man on side of car. Stop must be made before moving over 13th Street.

**Seymour**—Compress track at Loading Dock MP 50.8 will not clear man on side of car.

Trains with High-Wide loads and TOFC must watch out for close clearance on Old Main. Trains handling such cars must not be instructed to take siding when train length makes it necessary to double to the Old Main if it can be avoided.

**Farmers Coop** from center of track spout measures 17 Feet ATR, 5 Feet from center of track 15 Feet 6 Inches ATR. **Meyers Elevator** from center of track spout measures 18 Feet 6 Inches ATR.





**Stamford**—Lookout for low overhead clearance on Oil Mill Track.

**8. Valley Jct.**—Dual Control switch at MP 118.4 does not meet requirements as per Paragraph 4 of Rule 275 Consolidated Code of Operating Rules. Switch must be left in the hand throw position until complete movement has been made over the switch.

## RADIO INFORMATION FORT WORTH DIVISION


| Base Station                  | Channel | Hours in service and attended  |
|-------------------------------|---------|--|
| Ft. Worth Dispatcher's Office | 1       | 24 hours attended  |
| <b>Wayside Stations</b>       |         |  |
| Decatur                       | 1       | 24 hours attended except 3 PM-11 PM Sunday                                   |
| Bowie                         | 1       | 9 AM - 6 PM Monday thru Friday   |
| Dickworsham                   | 1       | 24 hours attended except 11 PM to 7 AM Sunday                                |
| Wichita Falls                 | 1       | 24 hours attended  |
| Vernon                        | 1       | 8 AM - 9 PM Monday thru Friday<br>8 AM - 5 PM Saturday.                      |
| Quanah                        | 1       | 8 AM - 5 PM Monday thru Friday   |
| Childress                     | 1       | 24 hours attended  |
| Memphis                       | 1       | 24 hours attended except 7:30 AM-3:30 PM Saturday                            |
| Clarendon                     | 1       | 24 hours unattended  |
| Malden                        | 1       | 24 hours attended except<br>7:00 AM to 3:00 PM Friday                        |
| Amarillo                      | 1       | 24 hours attended  |
| Tascosa                       | 1       | 24 hours attended except<br>7:30 AM-3:30 PM Saturday                         |
| Dalhart                       | 1       | 24 hours attended  |
| Texline                       | 1       | 24 hours attended  |
| Plainview                     | 1       | 5:30 AM - 1:30 PM Monday thru Saturday<br>3:00 PM - 11:00 Monday thru Friday |
| Lubbock                       | 1       | 7 AM - 11 PM Daily   |

# CAR CHART

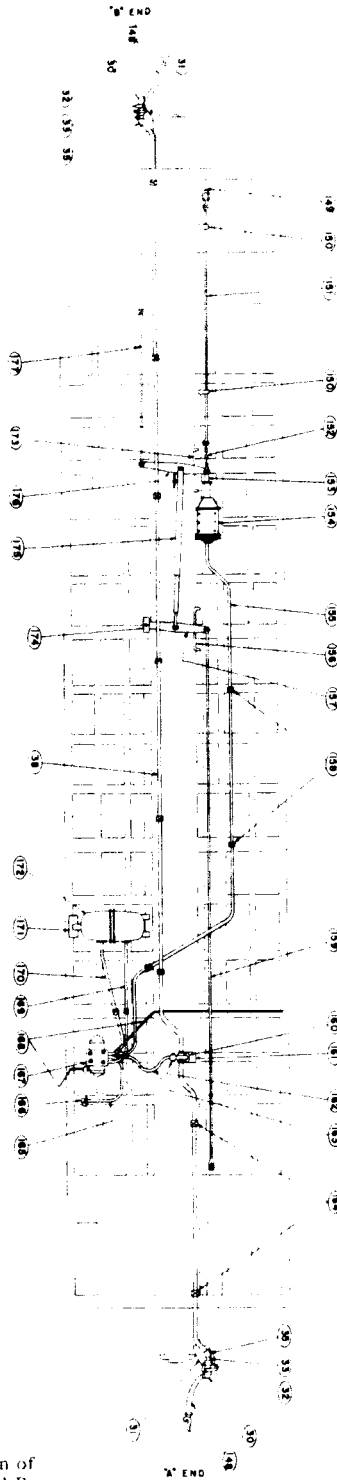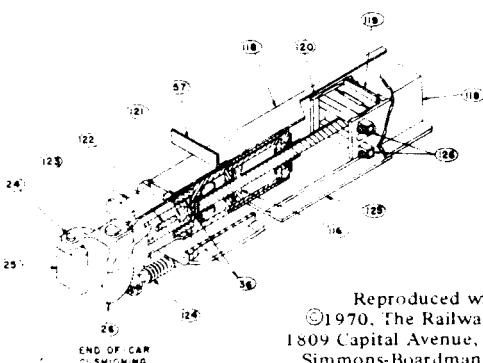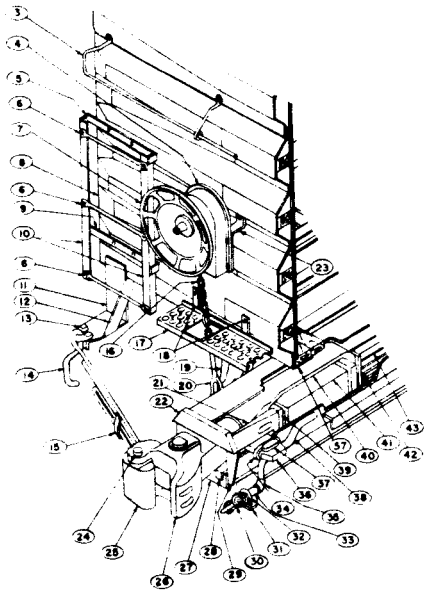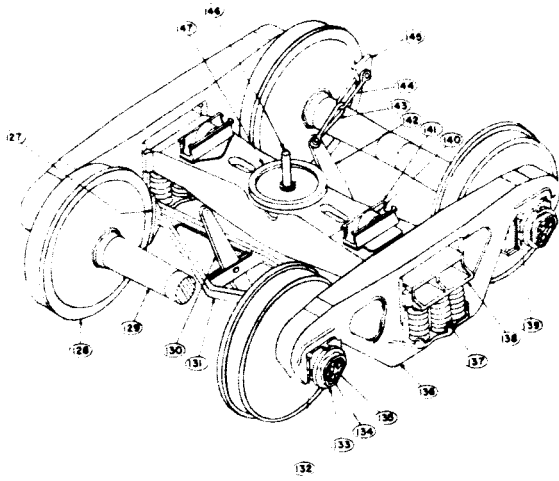

- 3 Horizontal end handhold
- 4 Hand brake housing
- 5 End ladder support—top
- 6 End ladder tread
- 7 Hand brake wheel
- 8 Steel end—bottom
- 9 End ladder support—bottom
- 11 Uncoupling lever bracket
- 12 Uncoupling lever bracket support
- 13 Uncoupling lever support
- 14 Telescoping uncoupling rod
- 15 Uncoupling lever guide
- 16 Hand brake chain
- 17 End platform (combined crossover and brake step)
- 18 End platform support
- 19 Bell crank
- 20 Vertical hand brake rod
- 21 Front draft gear stop
- 22 Striker
- 23 Hand brake housing support
- 24 Coupler knuckle pin
- 25 Coupler knuckle
- 26 Type E coupler head
- 27 Coupler carrier
- 28 Coupler wear plate
- 29 Striker flange
- 30 Angle cock
- 31 Angle cock support
- 32 Angle cock "U" bolt
- 33 Nipple
- 34 Drafte key washer
- 35 45° elbow
- 36 Draft key
- 37 Draft key retainer
- 38 Brake pipe, 1/4" (Train line)
- 39 Follower block
- 40 Coupler yoke
- 41 Draft gear
- 42 Rear draft gear stop
- 43 Rear draft gear stop reinforcement
- 116 Hydraulic piston
- 118 Center sill
- 119 Back stop plate
- 120 Rear lug casting
- 121 Striker casting
- 122 Coupler key
- 123 Cushioning unit
- 124 Restoring mechanism
- 125 Inspection plate
- 126 Rear cross key
- 127 Brake shoe
- 128 Wheel
- 129 Axle
- 130 Truck live lever
- 131 Brake beam
- 132 Roller bearing adapter
- 133 Roller bearing end cap
- 134 End cap retaining bolt
- 135 End cap locking plate
- 136 Truck side frame
- 137 Truck spring
- 138 Truck bolster
- 139 Roller bearing assembly
- 140 Truck side bearing roller
- 141 Truck side bearing housing
- 142 Truck dead lever
- 143 Clevis at dead lever
- 144 Clevis at dead lever fulcrum
- 145 Dead lever anchor—underframe mounted
- 146 Center pin
- 147 Truck center plate cast integral with truck bolster
- 148 Air hose
- 149 Hand brake chain at bell crank
- 150 Tand brake rod guide
- 151 Hand brake rod
- 152 Hand brake chain at cylinder
- 153 Cylinder push rod
- 154 Air brake cylinder
- 155 Cylinder pipe, 3/4"
- 156 Floating lever guide
- 157 Floating lever
- 158 Pipe clamp, 3/4"
- 159 Top rod, "A" end
- 160 Branch pipe tee
- 161 Branch pipe tee support
- 162 Combined dirt collector and cut-out rock
- 163 Connection hose
- 164 Pipe clamp, 1 1/2"
- 165 Retainer pipe
- 166 Retainer valve
- 167 ABD control valve
- 168 Release rod
- 169 Auxiliary reservoir pipe, 3/4"
- 170 Emergency reservoir pipe, 3/4"
- 171 Reservoir support
- 172 Combined auxiliary and emergency reservoir
- 173 Cylinder lever guide
- 174 Brake lever fulcrum
- 175 Brake slack adjuster
- 176 Cylinder lever
- 177 Top rod, "B" end

Reproduced with permission of  
 ©1970, The Railway Educational Bureau  
 1809 Capital Avenue, Omaha, Nebraska 68102  
 Simmons-Boardman Publishing Corporation

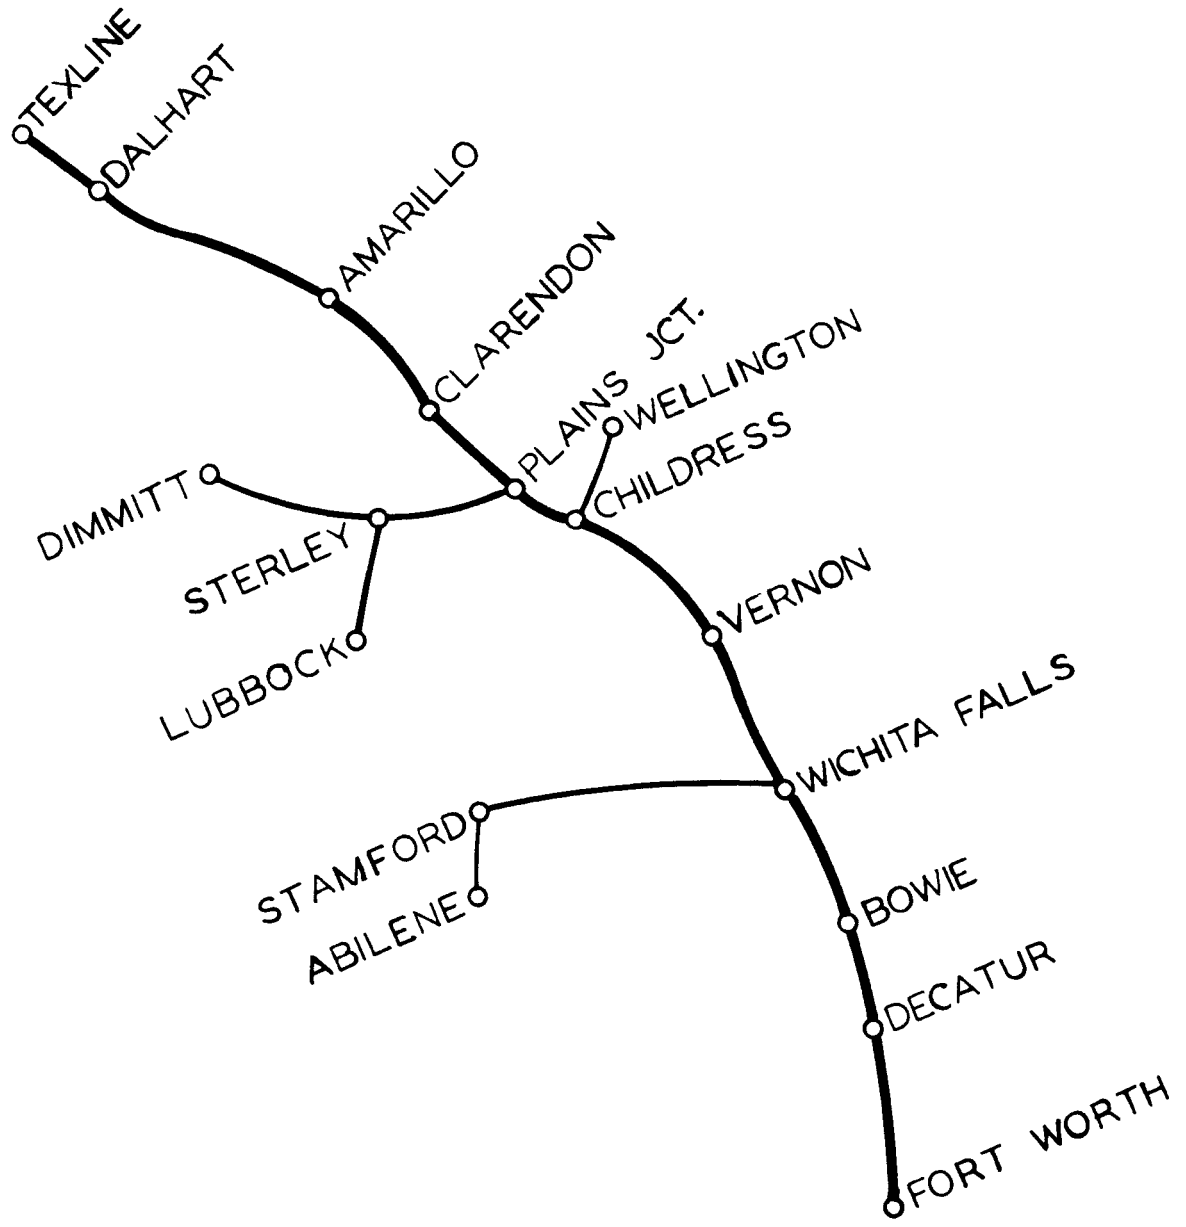

FORT WORTH AND DENVER RAILWAY

FOR INFORMATION PURPOSES ONLY

**LEFT BLANK INTENTIONALLY**

| POSITION IN FREIGHT TRAIN OF PLACARDED CARS  |  |                |                |   |  |              |             |                          |
|--|--|----------------|----------------|---|--|--------------|-------------|--------------------------|
| PLACARD APPLIED ON CAR   |  | EXPLOSIVES - A | POISON GAS     | LOADED PLACARDED TANK CARS (EXCEPT POISON GAS OR COMBUSTIBLE) | EMPTY PLACARDED TANK CARS (EXCEPT COMBUSTIBLE) | RADIO ACTIVE | COMBUSTIBLE | ALL OTHER PLACARDED CARS |
| RESTRICTIONS   |  |                |                |   |  |              |             |                          |
| MUST NOT BE NEARER THAN THE SIXTH CAR FROM ENGINE OR CABOOSE. HOWEVER WHEN LENGTH OF TRAIN WILL NOT PERMIT CAR TO BE SO PLACED IT MUST BE PLACED NEAR MIDDLE OF TRAIN. |  | X              | X              | X   |  |              |             |                          |
| PLACARDED CAR MUST NOT BE PLACED NEXT TO   | ENGINE   | X              | X              | X   | X  | X            |             |                          |
|  | OCCUPIED CABOOSE   | X <sup>①</sup> | X <sup>①</sup> | X   | X  | X            |             |                          |
|  | LOADED FLAT CARS   | ① X            | X              | X <sup>②</sup>  |  |              |             |                          |
|  | OPEN TOP CARS  | ③ X            | X              | X   |  |              |             |                          |
|  | CARS WITH ANY OF THE FOLLOWING OPERATING:<br>AN ENGINE<br>LIGHTED HEATERS<br>STOVES OR LAMPS<br>AUTOMATIC REFRIG-<br>ERATION UNITS | X              | X              | X   |  |              |             |                          |
|  | OCCUPIED CAR   | X <sup>①</sup> | X <sup>①</sup> | X   |  |              |             |                          |
|  | EXPLOSIVES - A   |                | X              | X   |  | X            | X           |                          |
|  | POISON GAS   | X              |                | X   |  | X            | X           |                          |
|  | RADIOACTIVE  | X              | X              | X   |  |              |             | X                        |
|  | UNDEVELOPED FILM   |                |                |   |  | X            |             |                          |
| EMPTY PLACARDED TANK CARS  |  |                |                |   |  |              |             |                          |
| ANY LOADED PLACARDED CAR (EXCEPT COMBUSTIBLE)  | X  | X              |                |   | X  |              |             |                          |

**HOW TO USE THIS CHART**

To determine the type of placard applied to car—follow vertical line down, and note which lines apply by "X" shown in box

--- NOTE ---

Cars with same placards may be placed next to each other.

**Footnotes:**

① A flatcar equipped with permanently attached ends of rigid construction is considered to be an open-top car.

② A loaded flatcar, other than a specially equipped car in trailer-on-flatcar or container-on-flatcar service or a flatcar loaded with vehicles secured by means of a device designed for that purpose and permanently installed on the flatcar, and of a type generally accepted for handling in inter-

change between railroads. This exception for cars in trailer-on-flatcar service does not apply to loaded flatbed trucks, loaded flatbed trailers, loaded open-top trailers, or loaded trucks or trailers without securely closed doors.

③ An open-top car when any of the lading protrudes beyond the car ends or when any of the lading extending above the car ends is liable to shift so as to protrude beyond the car ends.

④ A rail car placarded "EXPLOSIVES A" or "POISON GAS" in a moving or standing train must be next to and ahead of any car occupied by the guards or technical escorts accompanying this car. However, if a car occupied by guards or technical escorts is equipped with a lighted heater or stove, it must be the fourth car behind any car requiring "EXPLOSIVES A" placards.

**16 PERFORM SWITCHING IN A MANNER WHICH WILL AVOID DAMAGE TO CONTENTS OF CARS AND EQUIPMENT**

| Safe Coupling Speed (MPH)     | Impact Force   |
|-------------------------------|----------------|
| 1                             | 1              |
| 2                             | 4              |
| 3                             | 9              |
| 4                             | 16             |
| Damaging Coupling Speed (MPH) | Damaging Force |
| 5                             | 25             |
| 6                             | 36             |
| 7                             | 49             |
| 8                             | 64             |
| 9                             | 81             |
| 10                            | 100            |

**MAINTENANCE OF WAY  
CONDITIONAL STOP**

**Form Y Train Order**

The following forms of oral authorization by the Foreman and acknowledgment of understanding by the engineer are to be used to permit trains to pass a red flag without stopping within the limits of a Form Y train order.

Foreman will state: "FW&D Railway Foreman calling Extra 232 East about Order No. (Form Y Train Order No.)"

Engineer must respond, identifying his train as: "This is FW&D engineer, Extra 232 East."

When engineer has answered as above, the foreman will state: "Extra 232 East may pass red signal at (Mile Post Location and specify track involved) without stopping."

The foreman may also authorize a different speed from that shown in the Form Y train order by adding to his instructions: "Proceed at \_\_\_\_\_ MPH," or "Proceed at normal speed."

The engineer must repeat back to the foreman the instructions that are given him.

**SPEED TABLE**

| Time Per Mile |         | Miles Per Hour | Time Per Mile |         | Miles Per Hour |
|---------------|---------|----------------|---------------|---------|----------------|
| Minutes       | Seconds |                | Minutes       | Seconds |                |
| 1             | 12      | 50             | 2             | 40      | 22.5           |
| 1             | 15      | 48             | 2             | 45      | 21.8           |
| 1             | 20      | 45             | 2             | 50      | 21.2           |
| 1             | 25      | 42.3           | 3             | ....    | 20             |
| 1             | 30      | 40             | 3             | 9       | 19             |
| 1             | 40      | 36             | 3             | 20      | 18             |
| 1             | 45      | 34.3           | 3             | 31      | 17             |
| 1             | 50      | 32.7           | 3             | 45      | 16             |
| 2             | ....    | 30             | 4             | ....    | 15             |
| 2             | 10      | 27.6           | 5             | ....    | 12             |
| 2             | 15      | 26.6           | 6             | ....    | 10             |
| 2             | 20      | 25.7           | 7             | 30      | 8              |
| 2             | 30      | 24             | 10            | ....    | 6              |

**COMPANY DOCTORS**

Dr. W. P. Higgins, Jr., Chief Surgeon, Ft. Worth  
Dr. James P. Lee, Division Surgeon, Wichita Falls

|                     |                              |
|---------------------|------------------------------|
| Abilene .....       | Dr. Travis Smith             |
| Amarillo .....      | Dr. Donald A. Frank          |
| Amarillo .....      | Dr. Woolworth Russell        |
| Anson .....         | Dr. A. G. Andrus             |
| Bowie .....         | Dr. Hulén P. Crumpler        |
| Childress .....     | Dr. Jack Fox                 |
| Clarendon .....     | Dr. George W. Smith          |
| Dalhart .....       | Dr. Americo Garza            |
| Decatur .....       | Dr. John Valcik              |
| Dimmitt .....       | Dr. B. H. Lee                |
| Electra .....       | Dr. John G. Thompson         |
| Fort Worth .....    | Dr. O. J. Emery              |
| Fort Worth .....    | Dr. Carl M. Austin           |
| Henrietta .....     | Dr. Robert E. Hurn           |
| Houston .....       | Dr. N. A. Kilgore            |
| Iowa Park .....     | Dr. Gordon Clark             |
| Lockney .....       | Dr. W. J. Mangold            |
| Lubbock .....       | Drs. English, Hunt, & Upshaw |
| Memphis .....       | Dr. O. R. Goodall            |
| Memphis .....       | Dr. H. R. Stevenson          |
| Memphis .....       | Dr. Robert E. Clark          |
| Munday .....        | Dr. R. L. Newsom             |
| Plainview .....     | Medical Center Clinic        |
| Quanah .....        | Dr. Walter A. Brooks         |
| Stamford .....      | Stamford Clinic              |
| Vernon .....        | Dr. John B. Hardin           |
| Wellington .....    | Dr. C. B. Jones              |
| Wichita Falls ..... | Wichita Falls Clinic         |