

# **BURLINGTON NORTHERN INC.**

## **DENVER REGION**

---

**NEBRASKA, COLORADO  
AND ALLIANCE DIVISIONS**

### **Special Instructions No. 11**

**IN EFFECT AT 12:01 A.M.  
Central Standard Time  
AND  
MOUNTAIN STANDARD TIME**

**Sunday, October 28, 1979**

---

**Asst. Vice President  
Transportation  
H. E. PIERCE**

**Superintendent  
Nebraska Division  
T. R. HACKNEY**

**Asst. Vice President  
Operations  
W. J. CONDOTTA**

**Superintendent  
Alliance Division  
W. E. GREENWOOD**

**Superintendent  
Colorado Division  
D. H. BURNS**

# ALL SUBDIVISIONS

## 1. Speed Restrictions—

### Maximum Speeds Permitted

All speeds are subject to modification by speed restrictions indicated under each subdivision.

Passenger trains will be governed by freight train speeds if passenger train speed is not specified under Individual Subdivision.

Freight trains up to 100 Tons/OB\* ..... 60 MPH.

Freight trains over 100 Tons/OB\* ..... 50 MPH.

\*Tons per operative brake (Tons/OB) is defined as the gross trailing tonnage of the train divided by the total number of cars having operative brakes.

To determine if train exceeds 100 tons per operative brake, add two zeros to the number of cars having operative brakes. If train has greater trailing tonnage than the resulting figure, train exceeds 100 tons per operative brake. Example: 85 cars with operative brakes plus two zeros equal 8500. An 85 car train with 9182 tons would exceed 8500 and hence would exceed 100 tons per operative brake.

Unless otherwise provided—

Loaded unit ore, ballast and potash trains ..... 40 MPH.

Loaded unit coal trains ..... 45 MPH.

Empty unit coal trains ..... 50 MPH.

Engines running light or with caboose only ..... 50 MPH.

All trains and engines through turnouts, except as otherwise specified under Individual Subdivisions or where fixed signals indicate a lower speed ..... 12 MPH.

When temperatures are below zero degrees fahrenheit the following speed restrictions apply:

	Psgr. Trains	Freight Trains
Zero degrees to 10 below zero .....	65 MPH.	50 MPH.
11 degrees below zero and colder .....	60 MPH.	45 MPH.

Equipment	Main Line	Branch Line
Loaded BN ownership C-2 covered hoppers (less than 2200 cubic capacity) .....	50 MPH.	
Ore cars .....	45 MPH.	20 MPH.
Scale test cars except WO 3, 4, 5 .....	35 MPH.	20 MPH.
Air dump cars (loaded) .....	35 MPH.	20 MPH.
Wedge plow or dozer (dead in tow) .....	35 MPH.	20 MPH.
Rotary plow, wrecking derrick, loco crane, pile driver, clamshell, shovel, Jordan spreader .....	30 MPH.	15 MPH.
Log cars not equipped with permanent steel side stakes .....	30 MPH.	15 MPH.
Ribbon rail cars (loaded) .....	35 MPH.	25 MPH.

Except on Main Lines as shown in timetables, diesel engines, wrecking cranes and other types of heavy work equipment must not be operated on any subdivision unless authorized by Chief Dispatcher and Roadmaster or covered by specific instructions.

### Maximum Speed Diesel Units Dead in Tow—

Switcher units with friction bearings .....	35 MPH.
Switcher units with roller bearings .....	50 MPH.
Road switcher and other units .....	60 MPH.

### 1A. Control of Harmonic Rocking—

Under certain conditions, operation of trains between 13 and 21 miles per

hour can cause derailments due to harmonic rocking of cars. Where specified by Individual Subdivision Special Instructions or bulletin, the following restrictions will apply:

Trains, other than unit coal trains, ore trains, or trains consisting entirely of empty equipment, which cannot maintain speed of 21 miles per hour, must reduce speed to not exceed 13 miles per hour until movement can again exceed 21 miles per hour.

## 2. Restrictions on Diesel Units—

The number of diesel units coupled together in train operation, either working, idle, or dead in tow, must not exceed seven. When the operating diesel units on head end of train exceed 18 powered axles, Individual Subdivision Special Instructions or bulletin must be referred to in determining if any restrictions are in effect governing trailing tonnage. Maximum tonnages expressed in Individual Subdivision Special Instructions for head end power are extreme limits under ideal conditions and superintendents will establish lower limits as required.

In the event diesel units in excess of the above restrictions are to be handled dead in train, such units must be placed not less than 5 cars or more than 15 cars behind the lead units.

Diesel units not equipped with alignment control couplers when dead in tow in freight trains must be handled singly, not in groups, and not less than 5 cars or more than 15 cars from the road engine.

**Exception**—Trains of 5 cars or less may handle not more than three such diesel units coupled dead in tow to the working consist.

When an engine consist of more than 3 units in service includes diesel unit or units not equipped with alignment control couplers, only the three rear units will be allowed to work power when the train is to make a back-up movement. Other units must be isolated.

Diesel units NOT equipped with alignment control couplers:

All switcher units

Road and road switcher diesel units: 600-995, 1350-1355, 1357-1365, 1524-1576, 1578-1585, 1587-1601, 1603-1612, 1614, 1616-1619, 1621, 1700-1775, 1777-1875, 1877-1936, 1938-1958, 1960-1966, 1968-1998  
FW&D 605-610, 700-703, 850-859  
C&S 150-842

## 3. Remote Control (RCE-1) Operation—

Locomotives not equipped with alignment control coupler or bolster stops (see Item 2) must not be operated in RCE-1 consists. Locomotive units in RCE-1 operations, which will be coupled to cars, must be equipped with alignment control couplers.

Master and remote consists in RCE-1 operation must be confined to the following classes of locomotives:

C30-7, F-45, SD-40, SD-45, U-25C, U-28C, U-30C, U-33C

**Exception**—When necessary to operate other classes of locomotives in RCE-1 trains they must be confined to master consist only.

Unless otherwise provided in Individual Subdivision Special Instructions, remote controlled locomotives must be placed in train approximately two-thirds back from master consist by car count.

In all RCE-1 trains, the number of master consist powered axles must equal or exceed the number of remote consist powered axles, but in no case may the excess be greater than six powered axles. The master consist must have a minimum of twelve powered axles and a maximum of twenty-four powered axles. The remote consist must have a minimum of six powered axles and maximum of twenty-four powered axles.

Axles of cars numbered RCC 101 through RCC 112 must not be counted in determining the axle count of the remote consist.

RCE-1 equipment must not be used in trains handling empty equipment 80 feet and longer unless Individual Subdivision Special Instructions or bulletin are in effect to indicate the safe buffer between remote consist and such cars for that subdivision.

### 3A. Manned Helper Operations—

Locomotives not equipped with alignment control couplers (See Item 2)

must not be operated in manned helper consists unless equipped with bolster stops.

The following units, not equipped with alignment control couplers, are equipped with bolster stops:

602-644, 653, 675, 682, 702, 704-707, 710-714, 720, 724-735, 738-785, 788, 794-819, 824-825, 827-829, 831-847, 986-989, 1353, 1355, 1357-1360, 1362, 1365, 1524-1542, 1545, 1551-1552, 1555-1563, 1569-1571, 1573, 1575-1576, 1578, 1580-1584, 1587, 1590, 1592-1600, 1610, 1614, 1616-1618, 1621-1622, 1626-1643, 1700-1775, 1777-1799, 1802-1812, 1814, 1816-1817, 1819-1820, 1822, 1824-1833, 1835-1866, 1868-1875, 1877-1882, 1887-1889, 1892, 1894-1901, 1903-1904, 1906, 1908-1909, 1914-1926, 1928, 1930, 1932-1933, 1941-1952, 1955-1958, 1960-1965, 1971, 1975, 1978, 1990-1997  
FW&D 700-703

**Exception**—Single, non-equipped locomotives may be operated between locomotives equipped with alignment control couplers or bolster stops.

Locomotive units including trailing unit of head end consists, in manned helper operation, which will be coupled to cars must be equipped with alignment control couplers.

When cars listed in first sentence of Item 4 are handled at rear of train, manned helper must be cut in ahead of such cars. When helper is cut in ahead of such cars, or immediately ahead of the caboose, the helper will be considered as operating at the rear of the train.

Unless otherwise provided in Individual Subdivision Special Instructions:

Helpers of twelve powered axles or less, may be operated at rear of train ahead of or behind caboose, but must not be used on rear of trains handling empty equipment 80 feet and longer unless Individual Subdivision Special Instructions or bulletin are in effect to indicate the safe buffer between such cars and rear end helper for that subdivision.

Helpers will not exceed twenty-four powered axles. Head end consists in helper trains will not exceed twenty-four powered axles.

Head end consists in helper trains which are unit trains consisting entirely of Grade E steel couplers may have up to 36 powered axles. Helpers up to 24 powered axles may shove on the rear of trains so equipped.

Helpers of more than twelve powered axles must be cut into train. Dispatcher will advise conductor of tonnage rating of helper so that conductor can determine proper location in train, arranging that tonnage trailing the helper approximately equals combined tonnage rating of helper locomotives.

When restrictions governing trailing tonnage with head end power are provided by Individual Subdivision Special Instructions or bulletin, helper may be operated on head end, providing the combined head end and helper units do not exceed seven.

**Exceptions to Item 3A**—Helpers of six powered axles or less are not restricted by any of the provisions of this item.

### 3B. Diesel Unit Weights

This chart is to be used in conjunction with any weight restrictions in items 1 or 2, Individual Subdivisions.

Groups VII thru X are 6 axle units.

Group	Types	Unit Numbers	Weight (000)
I	SW-1	80-97	198-200
II	NW-5	986-995	217
III	SW-1-12, NW-2-12	1-14, 98-250, 375-595	232-255
	SW-12, NW-2	C&S 150-153, 156-160	246-250
	SW-12, NW-2	FWD 605-610	246-250
	F7-9	602-853	232-250
	GP-5	1350-1365	243
	GP-7	1510-1623, 1633, 1643	246-250
	GP-7	FWD 700-703	246-250
	GP-9	1723-1760, 1808-1830	246-251
	GP-9	1884-1891, 1902-1972	246-251
	GP-18	1990-1998	248
IV	SW-15	300-324	255-262

V	GP-7	1625-1632, 1634-1642	254
	GP-9	1700-1722, 1761-1807	255-259
	GP-9	1831-1883, 1973-1980	255-259
	GP-10	1400-1436	257
	GP-20-30-35-38	2000-2545	257-267
	A415-424, ARS3-11	4010-4246	245-258
VI	GP-40	3000-3039	275
	A-425	4252-4264	271
	U25B-28B-30B	5400-5484	269-275
	SW-7	C&S 154	274
VII	SD-7	6048-6059	298
VIII	SD-7-9	6023-6047, 6127-6206	316-326
	SD-7-9	C&S 810-842, FWD-850-859	316-326
IX	SD-7-9-24	6000-6022, 6100-6126	344-346
	SD-7-9-24	6240-6255	344-346
X	A636	4360-4369	393
	U23C-25C-28C	5200-5208, 5600-5677	370-392
	U30C, C30-7	5300-5394, 5500-5566	410-417
	U30C, C30-7	C&S 890-893	410-417
	U30C-33C	5700-5765, 5800-5944	388-411
	SD40-45, F-45	6300-7074, 8000-8029	369-416
	SD40-45	C&S 868-887, C&S 900-996	382-416
	SD40-45	C&S 7832-7868	382-416

#### 4. Restrictions on Placing Cars in Trains—

Following equipment, loaded or empty, must be on rear of trains, except in work trains or when otherwise provided by authority of Chief Dispatcher:

Outfit cars  
Scale test cars (next ahead of caboose) except WO-3, 4, 5  
Pile drivers  
Locomotive cranes  
Rotary snowplows, wedge plows, dozers  
Jordan spreaders  
Rear end only cars.

#### Handling 80 Foot or Longer Cars—

During either throttling or braking trailing tonnage may cause lateral force sufficient for derailment, where cars 80 feet or longer are coupled to cars 50 feet or shorter, when grade and curvature exceed certain limitations. To avoid creating such conditions, trains of 8,000 or greater trailing tons must handle empty cars 80 feet or longer in the rear 8,000 tons, unless otherwise provided in Individual Subdivision Special Instructions.

Where the total tonnage of cars 80 feet or longer is so large that it is impossible to comply with Individual Subdivision Special Instructions, the train consist must instead be so arranged that all cars less than 80 feet are handled in the required rear tonnage, thus placing all long-car to short-car couplings in the safe tonnage area.

In applying these limits, the following 80-foot or longer loaded cars must be regarded the same as an 80 foot or longer empty car:

Cars weighing less than 50 tons, gross weight  
Flat cars with one loaded trailer  
Flat cars with empty trailers  
Flat cars with either loaded or empty containers, unless the car is designated with a letter "Q" in the YHC column of the wheel report.

Locations where other restrictions are in effect are listed under Individual Subdivisions.

**Exception**—Trains consisting entirely of cars 80 foot and longer, except caboose, are not restricted by this provision; however, any helper locomotive at rear of train must be cut in ahead of caboose on such trains.

#### 5. Repeater Relay Air Car Operation—

When repeater relay air car is to be operated in train, it must be placed approximately in the middle of the train.

## 6. Instructions For Safety Inspection —

Each car placed in train, where personnel are not on duty for the primary purpose of inspecting freight cars, may be moved after receiving safety inspection in accordance with the following standards:

- A freight car with any defect that makes it unsafe for movement shall be corrected or set out of train.
- No part of the freight car, nor anything attached to the car, may be hanging low enough to foul a road crossing or track structure.
- Open top loads, including trailers and containers on flat cars, must be safely loaded.
- Where width or height appears close to clearance lines, it must be known that the movement has been cleared with the proper authority.
- Freight cars carrying bad order tags, that are safe for movement, may be taken in train to the nearest point where repairs can be made.

## 7. Hazardous Materials —

Holders of the Consolidated Code of Operating Rules must have BN Form 15784, "Handling Placarded Cars In Railroad Transportation", in their possession and be familiar with its contents.

All carloads of chlorine and anhydrous ammonia must not be cut off while in motion and no car moving under its own momentum shall be allowed to strike these cars, nor shall such cars be coupled to with more force than is necessary to complete the coupling. Employees must be informed of the presence of these cars and instructed to handle them in accordance with the above requirements.

### F.R.A. Emergency Order No. 5 —

- DOT specification tank cars 112A and 114A that are not equipped with head shields required by 49CFR179.100-23, transporting flammable gas requiring Flammable Gas placards, shall not be cut off in motion. No car moving under its own momentum shall be allowed to strike any DOT 112A or 114A tank car containing flammable gas placarded Flammable Gas, that is not equipped with head shields required by 49CFR 179.100-23, nor shall any such car be coupled into with more force than is necessary to complete the coupling.
- The shipping papers required by 49 CFR 172.203(g)(2), 174.25(a), for DOT specification tank cars 112A and 114A containing flammable gas, placarded Flammable Gas, and not equipped with head shields must carry the notations "DOT 112A" or "DOT 114A" and either "must be handled in accordance with FRA E.O. No. 5" or "shove to rest per E.O. No. 5".
- Railroad employees must be informed of the presence of these cars and instructed to handle them in accordance with the requirements of this order.

Note: For complete information on these regulations, consult R.M. Graziano's Tariff or B.E. Pamphlet 20.

Loaded placarded tank cars of the 112-A or 114-A types will not be handled in freight trains authorized at maximum speed of 60 MPH.

Trains handling loaded placarded tank cars of the 112-A or 114-A types must not exceed 50 MPH. Where maximum authorized speed is 40 MPH or less, such trains must not exceed 30 MPH observing all other speed restrictions.

112-A and 114-A tank cars will be identified on wheel reports and other computer generated documents by the letters (TR) in the first two positions of the car kind column.

When derailment or incident occurs involving hazardous materials:

- Except to effect rescue, keep everyone, including employees, at a safe distance pending determination of chemicals involved.
- Notify train dispatcher (yardmaster in terminal areas) advising portion of train or cars involved. From waybills, consist or other documents which may be available, determine special precautions to take when making inspection, i.e., protective clothing, breathing apparatus, etc.
- If flammable liquids or gases are involved and personal safety allows, remove or extinguish all sources of ignition in the area.

- When personal safety allows, take necessary action to prevent spilled material from entering lakes, streams or sewers, if possible.
- Remain at the scene, in close contact with the train dispatcher (yardmaster in terminals) and be readily accessible to advise emergency response forces of suspected dangers, contents and condition of cars. Furnish them all emergency response information available. This position should be maintained until relieved by an officer on the scene or emergency is corrected.

NOTE: Computer generated data does not indicate hazardous materials in TOFC/COFC shipments, certain mixed loads or residue remaining in empty tank cars. Such cars in a derailment may be as dangerous as other shipments. Information for such cars must be obtained from the waybill.

## 8. Storage of Cars Within Yard Limits Non-ABS Territory —

Within yard limits in non-ABS territory, the main track must not be used as a storage track except in case of emergency. When it becomes necessary to leave cars on main track in such territory, they must be protected by train order. This does not modify the requirement to move at yard speed as required in Rule 93.

## 9. Train Inspection and Failed Equipment Detector Instructions —

When blowing snow or other conditions restrict visibility to the point that proper running inspection cannot be made or when notified that a failed equipment detector is out of service or may be ineffective account blowing snow, freight trains will reduce speed to the extent required, stopping if necessary, to make train inspection. Conductors will determine frequency of inspections depending on visibility conditions and/or inspections by employees on the ground. Inspection intervals must not exceed 35 miles. Crews will examine train in advance of inoperative failed equipment detector which protects bridge, tunnel or other structure.

When a hot box detector is out of service, the requirements of Operating Rules or instructions will be suspended for defective equipment indicator associated with such hot box detector.

Whenever a car is set out for a hot bearing discovered within 25 miles of an in-service hot box detector, the conductor will make a wire report to the superintendent and chief dispatcher indicating date, train, and location of hot box detector which failed to detect the hot journal, with a copy of the wire to AVP Engineering, St. Paul. Dispatchers will arrange inspection of the detector by the signal maintainer in all such instances.

Employees should be alert for insulating commodities such as clay, chips, oil, etc., getting on top of rails. This condition could possibly insulate the track, and cause loss of train shunt. Such conditions should be promptly reported and trains protected per rules while in CTC and ABS territory.

### Failed Equipment Detector Instructions —


This device must be observed by the crew on rear of train, and they must be governed by the information shown immediately after the rear of the train has passed.

Enginemen must alert crew members on rear of train when approaching detector site.

Train must not move beyond failed equipment sign until authorization to proceed is received from rear of train.

When failed equipment is indicated engine crew must be notified to stop train for inspection. Advise dispatcher reason for delay by first available means of communication.

### DEFECTIVE EQUIPMENT DISPLAY AS VIEWED FROM APPROACHING TRAIN

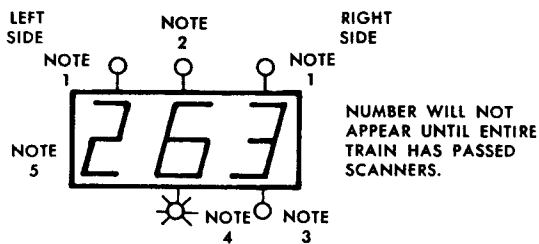

**Note: 1—**Hot bearing indicator light. When illuminated hot bearing detected. The hot bearing is located on right side of train when right light is illuminated, and on left side when left light is illuminated. Stop and inspect train.

**Note: 2—**Multiple hot bearing or dragging equipment indicator light. When illuminated inspect train for more than one hot bearing or dragging equipment.


**Note: 3—**Dragging equipment indicator light. When illuminated dragging equipment has been detected, stop and inspect train as indicated. Advise dispatcher reason for delay by first available means of communication.

**Note: 4—**Flashing train inspection indicator light. When illuminated train is being checked for hot bearing and dragging equipment. If this light is not illuminated, stop and inspect train.

**Note: 5—**Journal number display panel. Number shown is axle count from rear of train to first hot bearing or dragging equipment detected. When making inspection, check at least four (4) axles both directions from indicated number.

All journals on the train must be inspected whenever hot bearing indicator light, dragging equipment indicator light, multiple hot bearing or dragging equipment indicator light is illuminated and there is no count shown on defective equipment display panel or when digital readout displays false indication such as numbers totaling more than train axle count.

#### FAILED EQUIPMENT SIGN



Failed (F.E.) signs are located 13,500 feet beyond the defective equipment detector site.

#### 10. Spring Switches—

Instructions for operation of spring switches are posted at or near the spring switch and must be complied with. Spring switches are identified by yellow sign with black letter "S" located on or near spring switch.

All spring switches are equipped with facing point locks except when identified as not having a facing point lock in the Subdivision Special Instructions.

#### 11. Railroad Crossing at Grade—

At a railroad crossing at grade protected by signals, trains, engines or cars must not be left standing between opposing absolute signals unless coupled to other equipment that extends beyond one of the absolute signals.

#### 12. Automatic Interlockings—

When a train or engine is stopped by a Stop indication of an automatic interlocking signal and no immediate conflicting train or engine movement is evident, in addition to complying with Consolidated Code Rule 613, employees must be governed by instructions posted in the release box.

#### 13. Rules Changes and Modifications—

##### Consolidated Code Rule M and BN Safety Rule 94—

BN Safety Rule 94 and the second, third, and fourth paragraphs of Consolidated Code Rule M are cancelled and the following rule applies to all employees:

Train, engine and yard service employees must not occupy the roof of a freight car or caboose under any circumstances. Other employees whose duties require them to occupy the roof of a freight car or caboose may do so only when equipment is standing.

#### Consolidated Code Rules 12 and 14—

On Burlington Northern and affiliated lines, Consolidated Code Rules 12 and 14 are modified to include:

"In the absence of a green flag, when crew of train is positive that their entire train has passed the restriction as indicated in train order, unless other speed restrictions govern, normal speed may be resumed."

These instructions in no way modify the requirement for trackmen to display flags as required by Maintenance of Way Rules.

#### Consolidated Code Rule 19—

**Exception—**"When train is clear of main track at night in Non-ABS territory, markers must display an illuminated or reflectorized green to the rear" is deleted and Rule 19(C) will apply.

When light engine is operated as a train or when helper engine is in train behind caboose of train, headlight must be displayed on dim to the rear to serve as marker.

#### BLUE SIGNAL PROTECTION OF WORKMEN

##### RULE 26

As used in this rule, the following definitions apply:

**Workmen:** Railroad employees assigned to inspect, test, repair or service railroad rolling equipment or their components, including brake systems. Train and yard crews are excluded except when assigned to perform such work on railroad rolling equipment that is not part of the train or yard movement they are handling or will handle.

**Note—**"Servicing" does not include supplying cabooses, engines or passenger cars with items such as ice, drinking water, tools, sanitary supplies, stationery or flagging equipment. "Testing" does not include visual observations made by an employee positioned inside or alongside a caboose, engine or passenger car.

**Group of Workmen:** Two or more workmen of same or different crafts assigned to work together as a unit under a common authority and who are in communication with each other while the work is being done.

**Rolling Equipment:** Engines, railroad cars and one or more engines coupled to one or more cars.

**Blue Signal:** A clearly distinguishable blue flag or blue light by day and a blue light at night. The blue light may be displayed either steady or flashing. When attached to the operating controls of an engine, it need not be lighted if the inside of the cab area of the engine is sufficiently lighted so as to make the blue signal clearly distinguishable.

**Effective Locking Device:** When used in relation to a manually operated switch or a derail, a lock used that can be locked or unlocked only by the craft or group of workmen applying the lock.

**Car Shop Repair Track Area:** One or more tracks within an area in which the testing, servicing, repair, inspection or rebuilding of railroad rolling equipment is under the exclusive control of mechanical department personnel.

**Engine Servicing Track Area:** One or more tracks within an area in which the testing, servicing, repair, inspection or rebuilding of engines is under the exclusive control of mechanical department personnel.

**Switch Providing Direct Access:** A switch which if traversed by rolling equipment could permit that rolling equipment to couple to the equipment being protected.

##### RULE 26(A)

A blue signal signifies that workmen are on, under or between rolling equipment and that the equipment must not be coupled to or moved, except as provided in (E) and (F) of this rule. Rolling equipment must not pass a blue signal. Other rolling equipment must not be placed on the same track so as to block or reduce the view of the blue signal, except on designated engine servicing area tracks, car shop repair area tracks or when a derail is used to divide a track into separate working areas. When a blue signal is displayed at the entrance to a track, rolling equipment must not enter that track.

Blue signals must be displayed by or for each craft or group of workmen who are to work on, under or between rolling equipment. They may be removed or display discontinued only by or at the request of the same craft or group who placed them or requested their use.

When blue signal protection has been removed from one entrance of a track with a switch at each end or from either end of rolling equipment on a main track, that track is no longer under blue signal protection.

#### **RULE 26(B)**

When workmen are on, under or between rolling equipment and such work subjects them to the danger of personal injury from movement of such equipment, protection must be provided as follows:

##### **On A Main Track—**

A blue signal must be displayed at each end of the rolling equipment.

##### **On A Track Other Than Main Track—**

One of the following methods of protection or a combination thereof must be provided:

Each manually operated switch, including trailing point crossover switch, providing direct access must be lined against movement to that track, secured by an effective locking device and a blue signal must be placed at or near each such switch;

The facing point crossover switch must be lined against crossover movement and secured by an effective locking device; or,

A derail capable of restricting access to that portion of track where work will be performed must be locked in derailing position with an effective locking device, and:

— positioned at least 150 feet from the rolling equipment to be protected; or,

— positioned at least 50 feet from the end of rolling equipment on a designated engine servicing track or car shop repair track where speed is limited to 5 MPH.

A blue signal must be displayed at each derail; or,

Where remotely-controlled switches provide direct access, the person in charge of the workmen must notify the employee in charge of the remotely-controlled switches of work to be performed and be informed by the employee in charge of such switches that switches involved have been lined against movement to that track and devices controlling the switches have been secured.

The employee in charge of remotely-controlled switches must not remove the locking devices unless informed by the person in charge of workmen that it is safe to do so.

The employee in charge of remotely-controlled switches must maintain for 30 days a written record of each notification, which must contain the following information:

- (1) Date and time notification received of work to be performed;
- (2) Name and craft of employee in charge requesting the protection;
- (3) The number or other designation of track involved;
- (4) Date and time person in charge of workmen notified that protection has been provided; and
- (5) Date, time, name and craft of person in charge of workmen authorizing removal of the protection.

#### **RULE 26(C)**

In addition to protection required as prescribed in (B) of this rule, when workmen are on, under or between an engine or rolling equipment coupled to an engine, a blue signal must be attached to the controlling engine at a location where it is readily visible to the engineman or employee at the controls of that engine.

#### **RULE 26(D)**

When emergency repair work is to be done on, under or between an engine or rolling equipment coupled to an engine, and a blue signal is not available, the engineman or employee at the controls of the engine must be notified and appropriate measures must be taken to protect the employees performing such work.

#### **RULE 26(E)**

An engine must not enter a designated engine servicing area track under the exclusive control of mechanical forces unless blue signal protection governing entry is removed. The engine must stop short of coupling to another engine.

An engine must not leave a designated engine servicing area track unless blue signal protection is removed from that engine and from the track in the direction of movement.

Blue signal protection removed from track for the movement of such engines must be restored immediately after the engine has entered or has cleared the area.

An engine protected by blue signals, may be moved on a track within the designated engine servicing area under the exclusive control of mechanical forces, when operated by an authorized employee under the direction of the employee in charge of workmen, after the blue signal has been removed from the controlling engine to be repositioned and the workmen have been warned of the movement.

#### **RULE 26(F)**

Rolling equipment protected by blue signals on car shop repair tracks which are under exclusive control of car department forces may be repositioned with a car mover, when operated by an authorized employee under the direction of the employee in charge of the workmen, after the workmen have been warned of the movement.

#### **Consolidated Code Rule 34—**

Employees located in the cab of engine must communicate to each other in an audible and clear manner the name or aspect of each signal affecting movement of their train or engine, as soon as the signal is clearly visible or audible. It is the responsibility of the engineer to have each employee comply with these requirements, including himself.

It is the engineer's responsibility to have each employee located in the cab of engine maintain a vigilant lookout for signal and conditions along the track which affect the movement of the engine or train.

If a crew member becomes aware that the engineer has become incapacitated or should the engineer fail to operate or control the engine or train in accordance with the signal indications or other conditions requiring speed to be reduced, other members of the crew must communicate with the crew member controlling the movement at once, and if he fails to properly control the speed of the train or engine, other members of the crew must take action necessary to ensure the safety of the train or engine, including operating the emergency valve.

#### **Consolidated Code Rule 93—**

Yard limits will be indicated by yard limit signs. Stations where yard limits are in effect will be designated by timetable, train order, bulletin, general order or special instructions.

The main track(s) within yard limits may be used clearing the time of first class trains when due to leave the last station where time is shown. In non-ABS territory, in case of failure to clear the time of first class trains, protection must be provided as prescribed by Rule 99. Protection against second and third class trains, extra trains and engines is not required.

Trains must clear other trains which are superior as prescribed by Rules 86 and S-87.

All trains and engines, except first class trains, must move within yard limits prepared to stop short of train, engine, car, stop signal, derail or switch not properly lined and prepared to stop in one-half the range of vision but not exceeding 20 MPH, unless main track is known to be clear by block signal indication.

When moving against the current of traffic or on portion of double or two or more tracks used as single track within yard limits, all trains including first class trains must move prepared to stop short of train, engine, car, stop signal, derail or switch not properly lined and prepared to stop within one-half the range of vision but not exceeding 20 MPH.

Movements against the current of traffic within yard limits must not be made unless authorized by train order or protected by yardmaster or other authorized employee.

In yard limits in ABS territory, protection as prescribed by Rule 99 is not required in case of failure to clear the time of first class trains. Information on delayed first class trains may be issued by the train dispatcher either verbally or by message to yardmaster or member of a crew.

#### **Consolidated Code Rule 99—**

When a train is moving on a main track at less than one-half the maximum speed for that territory, flag protection against following trains on the same track must be provided by a crew member dropping off single lighted fuses at intervals that do not exceed the burning time of the fusee.

When a train is moving on a main track at more than one-half the maximum speed for that territory, under circumstances in which it may be overtaken by a following train, crew members responsible for providing protection will take into consideration the grade, curvature of track, weather conditions, sight distance, and relative speed of their train to a following train and will be governed accordingly in the use of fusees to protect their train.

When a train stops on a main track and flag protection against following trains on the same track must be provided, a crew member with flagman's signals must immediately go back at least the distance prescribed by timetable or other instructions for that territory, place two torpedoes on the rail not less than 150 feet apart and display one lighted fusee. He may then return one-half of the distance to his train where he must remain until he has stopped a following train or is recalled or relieved. When recalled he must leave one lighted fusee, and while returning to his train, he must also place single lighted fusees at intervals that do not exceed the burning time of the fusee. When train departs, a crew member must leave one lighted fusee and until the train resumes a speed not less than one-half the maximum speed for that territory, he must drop off single lighted fusees at intervals that do not exceed the burning time of the fusee.

When required by the rules, a crew member with flagman's signals must protect front of train against opposing movements by immediately going forward at least the distance prescribed by timetable or other instructions for that territory, placing two torpedoes on the rail not less than 150 feet apart, displaying a lighted fusee, and remaining at that location until recalled or relieved.

When a train is seen or heard approaching before the crew member has reached the prescribed distance, he must immediately place torpedoes and continue toward the approaching train, giving stop signals.

Crew members providing flag protection must not permit other duties to interfere with the protection of their train. The conductor and engineer are responsible for the protection of their train.

When a train requires protection the engineer must immediately sound signal 15(c) or 15(f). Inability to hear these signals does not relieve members of the crew from protecting the train.

Flag protection against following trains on the same track is not required under the following conditions:

- In ABS territory, when rear of train is protected by at least two block signals.
- When rear of train is protected by an absolute block (Absolute block means a block in which no train is permitted to enter while it is occupied by another train).
- When rear of train is within interlocking limits.
- When a train order or special instructions provides that flag protection is not required.

**NOTE:** These provisions do not apply to any unit of equipment which does not actuate the block or cab signals or to a work extra.

#### **Flagman's signals:**

**Day Signals—**A red flag, not less than ten torpedoes and six red fusees.

**Night Signals—**A white light, not less than ten torpedoes and six red fusees.

#### **Consolidated Code Rule 103 (C)—**

103(C): Cars on any track must be left clear of crossings and so as not to actuate crossing signals, and a clear passageway must be left to the station. When necessary to spot cars in the vicinity of public or private crossings they must, if practicable, be left not less than 200 feet from crossing. When it can be avoided, engines must not stand within 200 feet of public crossings.

#### **Consolidated Code Rule 103 (E)—**

103(E): Cars must not be handled ahead of engine between stations outside of yard limits except when necessary to take cars to or from spur track, or in work train service, or when it is necessary for a train to make a back-up movement. Such movements must be for no greater distance than necessary, and air brakes on such cars must be cut in and operative.

#### **Consolidated Code Rules 200 and 83 (B)—**

Rules 200 and 83(B) and other rules pertaining to authority for and signature on train orders and clearances are modified to permit them to be issued by the authority and over the signature of the Chief Dispatcher.

#### **Consolidated Code Rule 211—**

At stations designated by the Division Superintendent, duplication of slow and cautionary orders may be done mechanically on copier machine.

#### **Consolidated Code Rule 213—**

A set of train orders will be furnished the rear trainman on all passenger trains.

#### **Consolidated Code Rule 214—**

The following paragraphs are added to Consolidated Code Rule 214:

When a train and/or engine crew are relieved on line account hours of service or for other reasons, if the train orders, clearances and messages can not be personally delivered to the relieving crew, unless otherwise instructed, conductor will leave all train orders, clearances and messages in envelope on caboose desk and engineer will leave same in envelope on engine. Both conductor and engineer will show correct designation of train, date, location and signature on front of envelope.

Conductor of relieving crew must compare order numbers with engineer and unless otherwise instructed, conductor must contact train dispatcher before proceeding.

If the train dispatcher annuls the train orders by operator or directly to a member of the crew of the train or trains involved, all train orders and clearances must be removed from the engine and caboose by the crew being relieved.

The train dispatcher must instruct the relieving crew, before they leave their terminal, of the location where they will pick up train orders (including slow and cautionary orders).

#### **Form H Train Orders—**

When a work extra has been instructed to clear or protect against an extra train after a specified time and it is desired to extend such time, the following may be used:

"Work Extra \_\_\_\_\_ (clear or protect against) Extra \_\_\_\_\_ (direction) after \_\_\_\_\_ M instead of \_\_\_\_\_ M."

When a work extra has been instructed to protect against an extra train after a specified time and it is desired to extend such time, the following may also be used:

"Extra \_\_\_\_\_ (direction) wait at \_\_\_\_\_ until \_\_\_\_\_ M  
for Work Extra \_\_\_\_\_"

More than one train may be involved and waiting times at more than one station may be used.

When this form of order is used, identification of a work extra by a train restricted therefore must include confirmation by the conductor of the work extra that the entire train has arrived.

#### Form W Train Orders—

Examples 4, 5 and 6 of Form W train order as contained in the Consolidated Code of Operating Rules are modified as follows. These examples will show the train order number as well as the date.

#### Examples

(4) Extra 37 West register at C on Order No \_\_\_\_\_ of \_\_\_\_\_ (Date).

(5) Extra 38 East may check register at C against Extra 37 West on Order No \_\_\_\_\_ of \_\_\_\_\_ (Date).

(6) No 2 may check register at C against Extra 37 West on Order No \_\_\_\_\_ of \_\_\_\_\_ (Date).

When used in this manner, it will not be necessary that the train authorized to check the train register have a copy of the train order instructing an extra train to register.

The train instructed to register will insert the train order number and date of train order in the column of train register captioned "Signals".

The train authorized to check the register will check the column captioned "Signals" for the train order number and date to ascertain that it is the same as the train order number and date shown on their train order authorizing them to check the register.

#### Consolidated Code Rule 281—

In CTC territory, before using any electrically locked switch, permission must be obtained from control operator. Rule 281 is amended accordingly.

#### Railroad Radio Rules—

Consolidated Code of Operating Rules 650 through 663 and BN Safety Rules 685 through 696 are cancelled. The following Radio Rules as promulgated by the FRA are in effect:

400. The following rules and requirements cover use of railroad radio systems and govern employees using such systems.
401. All employees, except those specifically authorized by the Federal Communications Commission (FCC) are prohibited from making any internal adjustments to a railroad radio. Employees so authorized must carry their FCC operator license or verification card when on duty.
402. No employee shall knowingly transmit any false emergency communication, any unnecessary, irrelevant or unidentified communication nor utter any obscene, indecent, or profane language via radio. No employee shall divulge or publish the existence, contents, purport, effect or meaning of any communications (emergency communications excluded) except to the person for whom the communication is intended or to another employee of the railroad whose duties may require knowledge of the communication. The above applies either to communications received direct or to any that may be intercepted.
403. An emergency call will be preceded by the word "Emergency" repeated three times. Such calls shall be used only to cover initial reports of derailments, collisions, storms, washouts, fires, obstructions to track, or other matters which would cause serious delay to traffic, damage to property, injury to employees or the traveling public, and shall contain as complete information thereon as possible. All employees shall give absolute priority to communication from a station in distress, and except in answering or aiding that station shall refrain from sending any communication until there is assurance that no interference will result.
404. Any employee shall permit inspection of the radio equipment in his charge and all FCC documents pertaining thereto, by a duly accredited representative of the FCC at any reasonable time.

405. The location of radio base and wayside stations, time such stations are attended, and assigned channels, will be designated by timetable or other instructions.

406. Before transmitting, an employee operating a radio must listen a sufficient interval to be sure the channel is not already in use, give required identification, listen for acknowledgment from the employee to whom he intends to transmit, and must not proceed with transmission until such acknowledgment is received.

407. Employees transmitting or receiving a radio communication must begin with the required identification, and must include the following in the order listed below:

#### A. BASE OR WAYSIDE STATIONS:

1. Name or initials of the railroad.
2. Name of office or other unique designation of the station, and location of station.

#### B. MOBILE UNITS:

1. Name or initials of the railroad.
2. Train name (number), engine number, or words that identify the precise mobile unit.

If an exchange of communication continues without substantial interruption, identification must be repeated each 15 minutes. After positive identification has been made in connection with switching, classification and similar operations wholly within a yard, fixed and mobile units may use short identification after the initial transmission and acknowledgment.

408. An employee receiving a radio call must not delay acknowledgment; unless it would interfere with duties relating to safety.

409. An employee who receives a transmission must repeat it to the transmitting party except when the communication:

- A. Relates to yard switching operations.
- B. Is a recorded message from an automatic alarm device.
- C. Is general in nature and does not contain any information, instruction or advice which could affect the safety of a railroad operation.

410. To indicate to the receiving employee the transmission is ended and that a response is expected, the transmitting employee must say the word "over".

411. To indicate to the receiving employee the exchange of transmissions is complete and that no response is expected, the transmitting employee must say the word "out".

412. When base and wayside stations or mobile units are manned, the radio must be turned on to the appropriate channel with volume adjusted to receive communications.

413. Radio communication must not be used to avoid compliance with any operating rule.

414. Any radio communication which is not understood or completed in accordance with these rules, must not be acted upon and must be treated as though not sent. Exception: If any information is received which would affect the safety of employees, the public, or damage to property; the safe course must be taken, and, if necessary, movement stopped until an understanding has been reached.

415. Radios used in train operation, outside yard limits, must be tested at the point where the train is originally made up.

416. Engineers and conductors must test the radio at least once during each tour of duty to ensure the radios are working on the engine and caboose.

417. Radio tests must consist of an exchange of voice transmissions with another radio and the quality and readability of its transmission must be ascertained.

418. A malfunctioning radio must not be used, and each crew member of the train and the train dispatcher or other designated employee must be notified by any alternate means of communication available as soon as practicable.



419. Radio must not be used to give information to a train or engine crew about the position, aspect, name or indication displayed by a fixed signal, except between members of the same crew.

420. When radio is being used in lieu of hand signals both the direction and distance to be traveled must be given. Movement must be stopped in one-half the distance specified unless additional instructions are received.

421. When train orders are transmitted by radio they must be transmitted in accordance with applicable operating rules, and the following:

A. The train dispatcher or operator shall call the addressees of the train order and state his intention to transmit the train order.

B. Before the train order is transmitted the employee to receive and copy the train order shall state his name, identification or call sign, location, and that he is prepared to receive a train order. Train orders may not be received and copied by an employee operating the controls on an engine of a moving train. Train orders may not be transmitted to the crew of a moving train when, in the judgment of either the conductor, the engineer, or the train dispatcher, the train order cannot be received and copied without impairing the safe operation of their train.

C. Train orders shall be copied in writing by the receiving employee in the format prescribed in the operating rules.

D. After the train order has been received and copied, it shall be immediately repeated in its entirety. After verifying the accuracy of the repeated train order, train dispatcher shall then state "complete", the time, and the initials of the employee designated by the railroad. Employees copying train orders must then acknowledge by repeating "complete" and the time.

E. Except as provided by Rule 414 before a train order is acted upon, both the conductor and engineer must have a written copy of the train order and make certain that the train order is read and understood by other members of the crew.

F. Except as provided by Rule 414 a train order transmitted by radio which has not been made complete may not be acted upon and must be treated as though not sent. Rule 209 will not apply. "Complete" must not be given to a radio transmitted train order for other trains until response "complete" has been acknowledged by the train being restricted.

G. Information contained in a train order may not be acted upon by persons other than those to whom the train order is addressed.

422. Radio transmitters must not be operated when located less than 250 feet from blasting operations.

423. The railroad company is required to answer an official notice of violation of the terms of the Communications Act of 1934, as amended, within ten days from receipt of notice and any employee receiving inquiry concerning any violation shall answer such inquiry within 24 hours after receipt of notice.

424. Citizens band radios must not be used for railroad operating purposes.

Note: If necessary for clarity, a phonetic alphabet shall be used to pronounce any letter used as an initial, except initials of railroads.

A word which needs to be spelled for precision or clarity shall first be pronounced, and the word shall then be spelled. If necessary, the word shall be spelled again, using a phonetic alphabet.

#### **Consolidated Code Rule 729—**

Employees must familiarize themselves with the Department of Transportation regulations governing the handling and transportation of hazardous materials, and be governed thereby. When handling cars containing hazardous materials, it must be known that they are in proper place in the train.

#### **Consolidated Code Rule 957—**

At stations designated by the Division Superintendent, duplication of train location lineups may be done mechanically on copier machines.

#### **BN Safety Rule 144—**

BN Safety Rule 144 is cancelled and new Safety Rules 144(A) and 144(B) are in effect and read as follows:

144(A) Manual uncoupling of air hose on passenger equipment, between locomotives, yard air lines or when changing an air hose or air hose gasket must be performed as follows:

- a) Have both angle cocks closed. When disconnecting yard air line, valve must be closed.
- b) Take firm grip on hose coupling and apply upward pressure.
- c) Break connection gradually to reduce pressure in hose.
- d) Turn face away from air hose connection as pressure is released.
- e) When practicable, keep one foot outside of rail.

144(B) When air hoses are not manually uncoupled and separation is to be made, the following applies:

- a) Close angle cock on locomotive or on car toward locomotive when cut is made between cars.
- b) Operate uncoupling lever and signal for movement.
- c) Allow air hoses to part keeping all parts of body fully in the clear.

**BN Air Brake and Train Handling Rule 202 and BN Safety Rule 217—** have been modified to include a second paragraph which reads:

"When necessary to work under cars in trains where inadvertent movement of the car being worked on could occur, sufficient hand brakes must be applied adjacent to the car to prevent such movement."

#### **The Following Burlington Northern Air Brake and Train Handling Rules are Modified as Follows:**

##### **441-B-6 and 441-C-6**

Superintendent's instructions will govern as to the use of helper locomotives on descending mountain grades and to the use of dynamic braking on these helper locomotives.

219. Before motive power is detached or angle cocks are closed, brakes must be applied as covered by Rule 412. After recoupling and angle cocks are opened, it must be known that brake pipe air pressure is being properly restored as indicated by the caboose gauge and that brakes on rear cars are released. In the absence of a caboose gauge, air brake test must be made as prescribed by Rule 218.

224. Freight trains arriving at terminals where facilities are available and at which special instructions provide for immediate brake inspection and repairs, and locomotive remains on train shall have the air brakes applied by a service brake pipe reduction of 20 pounds. Inspection of brakes and needed repairs should be made as soon thereafter as practicable.

If the locomotive is detached or cut is made, brakes must be applied as prescribed by Rule 412.


412. A. Before locomotives are detached or angle cocks are closed on cars or trains which are to be left standing, the following action must be taken:

1. Apply automatic air brakes with 20 lb. brake pipe reduction;
2. Signal with one sound of the whistle or by radio that brake pipe reduction has been made;
3. Close angle cock on the locomotive, or on the car toward the locomotive when cut is to be made between cars;
4. Leave angle cock open on portion of cars or train to be left standing and when cut is made, brakes will apply in emergency on portion of the cut of cars or train to be left standing.

B. Where required, a sufficient number of handbrakes must be applied in accordance with Rule 401.

#### BN Speed Signs—

On subdivisions specified by bulletin, existing speed signs have been replaced by BN speed signs as illustrated below; Rule 240W and instructions on pages 126 and 127 of the Consolidated Code are changed accordingly.

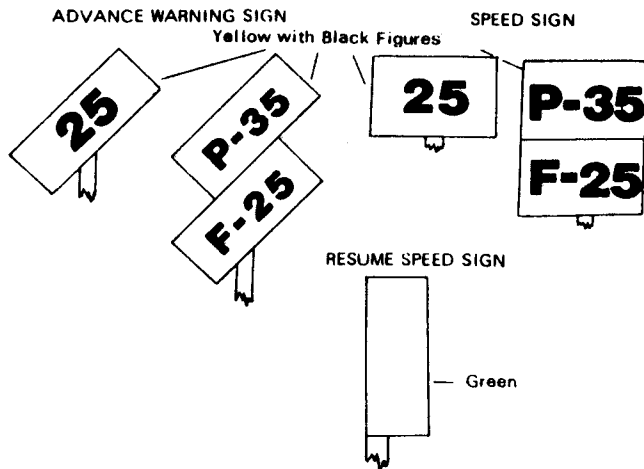

These signs, as illustrated, apply to train and engine movements as follows:

- Figures preceded by letter P apply to passenger trains.
- Figures preceded by letter F apply to freight trains.
- Figures not preceded by a letter apply to all train and engine movements.

#### When Speed Is To Be Reduced

An "Advance Warning" sign is placed two miles in advance of the location where the lower speed takes effect. At the point where the reduced speed applies, a "Speed Sign" will repeat the permissible speed. This lower speed is effective until a "Resume Speed" sign or another "Speed Sign" is displayed.

#### When Speed Is To Be Increased

At the end of a Reduce Speed zone, a train or engine will be governed by one of the following signs:

1. A "Speed Sign" displaying a higher speed.
2. A "Resume Speed" sign which will authorize the maximum permissible speed on that subdivision.

In either case, the speed must not be increased until the entire train has passed the sign displayed.

#### 14. Air Brake and Train Handling Rules—

BN Air Brake and Train Handling Rules, Form 15338 11-76, are in effect. Employees whose duties are in any way affected by these rules must have a copy of this book available while on duty.

#### 15. Automatic Cab Signals—

Cab signals on any engine unit, so equipped, must not be used on any other portion of Burlington Northern except on suburban equipment only on Chicago Division, First Subdivision.

#### 16. BN Signal Aspects and Indications—

BN signal aspects and indications as contained in pamphlet Form 15307 dated 2-1-77 are in effect. Special signal aspects and indications as shown for Burlington Lines on pages 118, 119, 120 and 121 in the Consolidated Code of Operating Rules, remain in effect.

#### 17. Amtrak Manual of Instructions—

Amtrak conductors and trainmen are held responsible for and must be conversant with the rules in Amtrak's Manual of Instructions for Conductors and Trainmen in Amtrak Service.

## NEBRASKA DIVISION

(St. Joseph—Omaha)

### FIRST SUBDIVISION

- | 1. Speed Restrictions—  | Maximum Speeds Permitted |         |
|---|--------------------------|---------|
|   | Passenger                | Freight |
| <b>Zone—Between</b>   |                          |         |
| Napier and Pacific Jct. ....  |                          | 49 MPH. |
| Freight trains over 100 Tons/OB between Napier and Pacific Jct. ....                        |                          | 30 MPH. |
| Empty unit coal trains between Napier and Pacific Jct. ....                                 |                          | 40 MPH. |
| Pacific Jct. and MP 491 ....  | 79 MPH.                  | 50 MPH. |
| MP 60.4 and MP 64 ....  |                          | 20 MPH. |
| MP 64 and MP 65.3 ....  |                          | 30 MPH. |
| Turnout end of two main tracks, Waterworks MP 67.1 ....                                     |                          | 50 MPH. |
| Eighth Subdivision main track turnout MP 97.4 ...   |                          | 30 MPH. |
| Curve MP 490.6 ....   | 40 MPH.                  | 30 MPH. |
| MP 491—East end of curve Council Bluffs yard ....   | 30 MPH.                  | 15 MPH. |
| MP 491.9 and MP 493.4 ....  | 15 MPH.                  | 15 MPH. |
| Nodaway, Starks, Napier, Folsom and Island Park siding turnouts ....                        |                          | 25 MPH. |
| Engines using Iowa Power track MP 489 must not exceed 15 MPH.                               |                          |         |
| Bridge derrick 975501 and 250-ton wrecking derrick over Bridge 65.2 must not exceed 10 MPH. |                          |         |
2. **Bridge, Engine and Heavy Car Restrictions—**
- Cars heavier than the following not permitted without authority of Superintendent:
- |                           |              |
|---------------------------|--------------|
| 40 feet or less in length | 220,000 lbs. |
| Over 40 feet long         | 263,000 lbs. |
- Diesel units in Groups IX and X must not operate on following tracks:
- Hamburg—**North elevator.
- St. Joseph—**Trains and engines handling wide and low cars loaded with airplane parts and similar lading, must not operate through passenger depot tracks 1 and 2 account will not clear high platforms.
- Omaha—**Auto rack cars and piggyback cars must not be handled on depot tracks 2 and 3.
- Bridge derrick 975501 may operate on tracks 5 and 6, and must keep off all other tracks adjacent to station canopies.
3. **Train Register Exceptions—**
- Napier, Bigelow, Corning—**Trains will register when directed by train order. Bigelow train register located in telephone box MP 101.8. Corning train register west wye switch.
- Pacific Jct.—**Trains in through movement will register by register ticket.
4. **Clearance Provisions and Exceptions Rule 83(B)—**
- Napier—**Rule 83(B) does not apply to eastward trains off Eighth Subdivision.

**Pacific Jct.**—Trains must receive clearance.

**Omaha**—Rule 83(B) does not apply.

At intermediate locations in CTC territory, Rule 83(B) will not apply when so authorized by train dispatcher.

5. **Rule 99**—When flagging is required, distance will be 1.5 miles.
6. **Hamburg**—  
Westward trains use siding east of depot; eastward trains use siding west of depot, unless otherwise provided.  
Stop and protect switching movement over E Street.
7. **Pacific Jct.**—The time of trains, via Bartlett, applies at the southeast wye track switch. Normal position of southeast wye track switch is for the wye.
8. **Council Bluffs Yard**—Switching movements within the interlocking limits at CMStP&P-CRI&P crossings MP 491.8, Council Bluffs yard, may be made on permission from the control operator. Engine must follow each of the last six cars switched out of the interlocking limits. When stop signal governing movement over the crossing on BN main track fails to clear, Rules 606 and 269 must be complied with.  
When stop signal fails to clear for main track movement over N&W crossing, MP 491.3; C&NW crossing, MP 492.7; IC crossing, MP 493; or CRI&P crossing, MP 493, CTC rules must be complied with and, in addition, movement over crossing must be made under protection.  
N&W crossing over freight track all movements must stop and be governed by signal indication.
9. **Omaha**—Union Pacific crossing between junction with Union Pacific and Sixth Street, is protected by electrically locked gate, normally lined and locked for BN train movements.
10. **Manual interlockings** not indicated at station between St. Joseph and Waterworks:  
St. Joseph Term. Ry MP 61.5  
Missouri Pacific crossing MP 61.9  
UT crossing MP 64
11. **Train location line-up** not required between St. Joseph and Napier or between Pacific Jct. and Omaha.
12. **Stations authorized to duplicate train orders and train location line-ups mechanically:** St. Joseph, Phelps, Pacific Jct. and Council Bluffs Yard.

## NEBRASKA DIVISION

(Pacific Jct.—Carling)

### SECOND SUBDIVISION

1. <b>Speed Restrictions—</b>	Maximum Speeds Permitted	
	Passenger	Freight
<b>Zone—Between</b>		
Passenger trains	79 MPH.	
Pacific Jct. to MP 1.1	40 MPH.	25 MPH.
Pacific Jct., east crossover between main tracks at MP 473.8	30 MPH.	30 MPH.
Pacific Jct., crossover between main tracks at MP 475	30 MPH.	30 MPH.

Pacific Jct., northeast wye	25 MPH.	20 MPH.
MP 1.1 to MP 3.5	65 MPH.	40 MPH.
MP 0.00 to MP 14.8 (Omaha line)	65 MPH.	50 MPH.
Curve MP 13.7	60 MPH.	50 MPH.
MP 14.7 to MP 16	50 MPH.	40 MPH.
MP 16 to MP 16.8	20 MPH.	20 MPH.
MP 16.8 to MP 17.3	10 MPH.	10 MPH.
MP 17.3 to MP 17.9	20 MPH.	20 MPH.
MP 17.9 to MP 21.5	50 MPH.	40 MPH.
Curve MP 19.1	30 MPH.	20 MPH.
MP 57 to MP 58.9		40 MPH.
MP 58.9 to MP 59.4 via passenger line	25 MPH.	20 MPH.
MP 58.9 to MP 60 via freight line	25 MPH.	25 MPH.
Between Baird Tower and Hall Tower via passenger tracks, Lincoln	25 MPH.	20 MPH.
Plattsmouth—Through turnout in south track MP 5	30 MPH.	30 MPH.
Oreapolis—Through turnouts	30 MPH.	30 MPH.
Gibson—Through turnout south track MP 15	30 MPH.	30 MPH.
Ashland—East crossovers MP 35.2 between south track and Omaha line	40 MPH.	40 MPH.
Between north track and Louisville line	30 MPH.	30 MPH.
MP 36.4 turnout west end No. 1 track	30 MPH.	30 MPH.
MP 36.4 through crossover between main tracks	30 MPH.	30 MPH.
MP 41.1 through crossovers between main tracks	30 MPH.	30 MPH.
Head end of westward trains passing signals at MP 44.4 and on south track at MP 47.6—		
Freight trains up to 100 Tons/OB		55 MPH.
Freight trains over 100 Tons/OB		45 MPH.
Head end of eastward trains passing signals on north and south tracks at MP 49.1 and MP 45.5—		
Freight trains up to 100 Tons/OB		55 MPH.
Freight trains over 100 Tons/OB		45 MPH.
Trains must not exceed 25 MPH through turnouts of controlled sidings, except 15 MPH through turnouts of controlled siding Omaha.		
Trains must not exceed speeds designated through the following dual control switch turnouts:		
Oreapolis wye		15 MPH.
Pappio		30 MPH.
Gibson—East yard switch MP 13.4		30 MPH.
South Omaha MP 19.8		15 MPH.
Bellevue—On siding, diesel units in Groups IX and X		20 MPH.

### 2. **Bridge, Engine and Heavy Car Restrictions—**

Cars heavier than the following not permitted without authority of Superintendent:

40 feet or less in length	220,000 lbs
40 feet to 52.5 feet in length	263,000 lbs
52.5 feet or longer	315,000 lbs

Diesel units in Groups IX and X must not operate on following tracks:

Plattsmouth	Lead to BREX yard
Ashland	Team track
	West elevator track

## Havelock

South side of main tracks

East End ..... Storage track  
North paint line track  
All shop tracks proper

South side of main tracks

West End ..... Roundhouse tracks  
Shop lead  
All shop tracks proper

North side of main tracks

West End ..... Material yard lead cannot be used  
beyond switch to No. 10 track  
All material yard tracks

**Lincoln**—GP-38 class engines Nos. 2072 through 2077, must not use passenger yard tracks Nos. 3, 4 and 5.

**Omaha**—Bridge derrick 975501 may operate on tracks 5 and 6 only and must keep off all other tracks adjacent to station canopies.

Auto rack cars and piggyback cars must not be handled on depot tracks 2 and 3 at Omaha.

### 3. Train Register Exceptions—

**Pacific Jct.**—Trains in through movement will register by register ticket.

### 4. Clearance Provisions and Exceptions Rule 83(B)—

**Omaha**—Rule 83(B) does not apply to westward trains off First Subdivision.

At intermediate locations in CTC territory Rule 83(B) will not apply when so authorized by train dispatcher.

### 5. Rule 99—When flagging is required, distance will be 1.5 miles.

### 6. Omaha—

Union Pacific crossing between junction with Union Pacific and Sixth Street, is protected by electrically locked gate, normally lined and locked for BN train movements.

Interlocking at Fifth and Howard Streets is automatic. Approach clearing sections are 500 feet in length and when occupied will cause signal to display a proceed aspect if no conflicting movements are being made. If movement approaching a clear signal aspect is delayed, signal may display a stop aspect after expiration of pre-determined time. Electrically locked derails on auxiliary tracks may be removed when movement has occupied short track circuit in advance of derail after switch padlock has been removed and indicator light displays. Derails must be restored and locked immediately after movement has cleared the derail. Push buttons on signals clear signal to make reverse movement or a forward movement after making reverse movement.

### 7. South Omaha—

When westward trains enter South Omaha yard by signal indication through dual controlled switch at MP 19.8, such indication will convey control operator's permission to enter controlled siding through switch at MP 20.3. Trains stopped or delayed in making this movement must receive permission from control operator before entering or fouling controlled siding. If conditions require, westward train will be stopped and notified by control operator before entering yard at MP 19.8.

### 8. Lincoln—

Interlocking at Missouri Pacific crossing MP 58.9 is manually controlled. Eastward signals are part of Centralized Traffic Control system. Westward signals are interlocked and are part of Baird interlocking.

Centralized Traffic Control in effect on both freight tracks between Baird interlocking limits and Hall interlocking limits.

### 9. Automatic Interlockings not Indicated at Station—

C&NW crossing 2.7 miles west of Havelock.

### 10. Manual Interlockings not Indicated at Station—

Missouri Pacific crossing 4.2 miles west of Havelock.

### 11. Rotating white light on control bungalow of the combination hot box and dragging equipment detectors at MP 39 between Ashland and Greenwood indicates power off controls and dispatcher should be advised immediately.

When snowplow, snowblower or track surfacing equipment is performing work within 200 feet of MP 39, signal maintainer should be present to prevent damage to equipment.

### 12. Train location line-up not required between Pacific Jct. and Baird Tower.

### 13. Stations authorized to duplicate train orders mechanically: Pacific Jct., Lincoln, Carling and Gibson.

### 14. Gibson—

All trains must whistle freely between Missouri Avenue and west end Gibson Yard account employees working close to main track.

## NEBRASKA DIVISION

(Oreapolis—Ashland)

### THIRD SUBDIVISION

#### 1. Speed Restrictions— Maximum Speeds Permitted

##### Zone—Between Freight

Maximum speed ..... 50 MPH.

Oreapolis—Turnout at end of two main tracks ..... 35 MPH.

West wye switch and west leg of wye ..... 15 MPH.

Ashland—Through crossover from Louisville line to north track ..... 30 MPH.

Turnouts of controlled sidings ..... 25 MPH.

Between Oreapolis and Ashland, bridge derrick 975501 and 250-ton wrecking derrick may operate 25 MPH.

#### 2. Bridge, Engine and Heavy Car Restrictions—

Cars heavier than the following not permitted without authority of Superintendent:

40 feet or less in length ..... 220,000 lbs.

40 feet to 52.5 feet in length ..... 263,000 lbs.

52.5 feet or longer ..... 315,000 lbs.

#### 3. Train Register Exceptions—None.

#### 4. Clearance Provisions and Exceptions Rule 83(B)—

**Oreapolis**—Rule 83(B) does not apply.

**Ashland**—Rule 83(B) does not apply except westward trains, from Third Subdivision enroute to Tenth Subdivision must receive clearance.

At intermediate locations in CTC territory Rule 83(B) will not apply when so authorized by train dispatcher.

#### 5. Rule 99—When flagging is required, distance will be 1.5 miles.

6. **Oreapolis**—Missouri Pacific railroad crossing over west leg of wye protected by automatic interlocking signals.
7. Train location line-up not required between Oreapolis and Ashland.

## NEBRASKA DIVISION

(Lincoln—Hastings)

### FOURTH SUBDIVISION

1. **Speed Restrictions—**

Zone—Between	Maximum Speeds Permitted	
	Passenger	Freight
Passenger trains	79 MPH.	
Baird Tower and Hall Tower, via passenger tracks, Lincoln	25 MPH.	20 MPH.
Lincoln to MP 60.5	30 MPH.	20 MPH.
MP 60.5 to MP 66.7		50 MPH.
Cobb turnout	25 MPH.	25 MPH.
Cushman-Cobb (freight line)	35 MPH.	35 MPH.
Trains using east wye track MP 154.1 to Fourteenth Subdivision	35 MPH.	35 MPH.
MP 155 to MP 156		50 MPH.
MP 156 to MP 157	25 MPH.	25 MPH.
MP 157 to MP 158		30 MPH.
Crossover MP 154.9, Brick Yard	30 MPH.	30 MPH.
Turnouts MP 155.8	30 MPH.	30 MPH.
Crossover MP 156	15 MPH.	15 MPH.
Crossover and turnouts MP 156.4	15 MPH.	15 MPH.
Turnout west end of No. 1 track MP 158	30 MPH.	30 MPH.
Turnout end of two main tracks Gaines	40 MPH.	40 MPH.
Trains must not exceed 35 MPH through turnouts of controlled sidings.		
2. **Bridge, Engine and Heavy Car Restrictions—**

Cars heavier than the following not permitted without authority of Superintendent:

40 feet or less in length	220,000 lbs.
40 feet to 52.5 feet in length	263,000 lbs.
52.5 feet or longer	315,000 lbs.

Diesel units in Groups IX and X must not operate on following tracks:

Berks	House track
Hastings	All industry tracks

Crete—Engines must not go beyond hopper on oil track spur.
3. **Train Register Exceptions—**

Hastings Tower—Trains will register by register ticket.
4. **Clearance Provisions and Exceptions Rule 83(B)—**

Crete—Rule 83(B) does not apply to eastward trains off Sixth Subdivision.

Hastings—Rule 83(B) does not apply.

**Hastings Tower**—Trains originating at Hastings and through trains must receive clearance.

At intermediate locations in CTC territory Rule 83(B) will not apply when so authorized by train dispatcher.

5. **Rule 99**—When flagging is required, distance will be 1.5 miles.

6. **Fairmont**—
 

Normal position junction switches as follows:

East end for Twenty-Fifth Subdivision.

West end for Fifth Subdivision.

7. **Crete**—Switching movements over Main Street crossing must be protected by a member of the crew in accordance with Rule 103 regardless of the position of the gates. On old Wymore main track cars must not be left less than 70 feet from either side of crossing. Eastward passenger trains making station stop should stop with head end not less than 320 feet west of crossing.

8. Train location line-up not required between Hall Tower and Hastings.

9. Stations authorized to duplicate train orders and train location line-ups mechanically: Hobson, Crete and Hastings Tower.

## NEBRASKA DIVISION

(Hebron—Fairmont)

### FIFTH SUBDIVISION

1. **Speed Restrictions—**

Zone—Between	Maximum Speeds Permitted	Freight
Fairmont and Strang		35 MPH.
Strang and Hebron		30 MPH.
Engine or leading car of trains over highway crossing MP 0.9		10 MPH.
Engine or leading car between absolute signals UP crossing, MP 29.2		15 MPH.
Derricks between Strang and Hebron		10 MPH.
Item 1A, All Subdivisions applies.		
2. **Bridge, Engine and Heavy Car Restrictions—**

Cars heavier than the following not permitted without authority of Superintendent:

40 feet or less in length	220,000 lbs.
Over 40 feet long	263,000 lbs.

Between Fairmont and Hebron bridge derrick 975501 and 250-ton wrecking derrick must not operate.
3. **Train Register Exceptions—**

Strang—Trains will register when directed by train order. Register located at north switch west wye.
4. **Clearance Provisions and Exceptions Rule 83(B)—**

Strang—Rule 83(B) does not apply.
5. **Rule 99**—When flagging is required, distance will be 1.5 miles.
6. **Fairmont**—Normal position junction switch west end Fairmont is for Fifth Subdivision.

**7. Strang—**

Normal position of east and west wye switches of east wye on the Sixteenth Subdivision is for Sixteenth Subdivision.

Normal position of the south switch east wye is for the west leg of wye.

Normal position of east and west wye switches of west wye on the Sixteenth Subdivision is for the east and west legs of wye.

Normal position of the north switch west wye is for the west leg of wye.

8. Unless otherwise provided protection against following trains as required by Rule 99 is not necessary between Hebron and Strang.

5. **Rule 99**— Unless otherwise provided, protection against following trains is not necessary. When required to flag distance will be 1.5 miles.

6. Lights on train order signals will not be displayed.

7. **Wymore**— All tracks within yard limits are yard tracks.

## NEBRASKA DIVISION

(Crete—Wymore)

### SIXTH SUBDIVISION

1. **Speed Restrictions—** Maximum Speeds Permitted
- | Zone—Between   | Freight |
|--|---------|
| Junction switch at MP 0.8 and Beatrice   | 40 MPH. |
| Curve MP 1.00  | 20 MPH. |
| Beatrice and Wymore  | 30 MPH. |
| Eastward engine or leading car between absolute signals of Junction Switch MP 1  | 20 MPH. |
| Diesel units in Groups IX and X single unit only   | 30 MPH. |
| Between Crete and Wymore, bridge derrick 975501 and 250-ton wrecking derrick may operate 25 MPH other derricks 30 MPH. |         |
- Item 1A, All Subdivisions applies.
2. **Bridge, Engine and Heavy Car Restrictions—**
- Cars heavier than the following not permitted without authority of Superintendent:
- |                           |              |
|---------------------------|--------------|
| 40 feet or less in length | 220,000 lbs. |
| Over 40 feet long         | 263,000 lbs. |
- Diesel units in Groups IX and X must not operate on following tracks:
- |          |                |                |
|----------|----------------|----------------|
| Shestak  | Elevator track |                |
| Wilber   | Spur track     |                |
| Beatrice | Coal track     | No. 3 track    |
|          | Kees track     | Creamery track |
|          | No. 1 track    | Gas track      |
|          | No. 2 track    | Nemaha main    |
- MP 31.8
- Brick yard spur
- Between Wilber and Beatrice— At Hoag on Cominco and Phillips lead maximum number of engine units permitted is two of any class of power.
3. **Train Register Exceptions—**
- Crete— Westward trains register by register ticket when operator on duty. Operator on duty 8:00 a.m. until 6:00 p.m. Monday through Friday.
4. **Clearance Provisions and Exceptions Rule 83(B)—**
- Crete, Beatrice— Trains must receive clearance when operator on duty. Crete operator on duty 8:00 a.m. until 6:00 p.m. Monday through Friday. Beatrice operator on duty 7:30 a.m. until 4:30 p.m. Monday through Friday.

## NEBRASKA DIVISION

(Lincoln—Ravenna)

### SEVENTH SUBDIVISION

1. **Speed Restrictions—** Maximum Speeds Permitted
- | Zone—Between  | Freight |
|---|---------|
| Lincoln and MP 1.1 via Baird  | 10 MPH. |
| Ravenna—  |         |
| Between MP 126.9 and MP 127.2   | 30 MPH. |
| Between MP 127.2 and MP 127.7   | 20 MPH. |
| Cushman— Turnout to passenger line  | 30 MPH. |
| Grand Island— Through turnout west of UP crossing   | 30 MPH. |
| Ravenna— Through east turnout   | 30 MPH. |
| Head end of eastward trains passing signals at MP 126—  |         |
| Freight trains up to 100 Tons/OB  | 55 MPH. |
| Freight trains over 100 Tons/OB   | 45 MPH. |
| Head end of westward trains passing signals at MP 126.9—  |         |
| Freight trains up to 100 Tons/OB  | 50 MPH. |
| Freight trains over 100 Tons/OB   | 45 MPH. |
| Between York and McCool Jct. and York and Benedict  | 20 MPH. |
| Engine or leading car over Nobes Avenue between York and McCool Jct.  | 10 MPH. |
| Through turnouts of beginning and end of double track and turnouts of all controlled sidings and crossovers equipped with dual control switches | 35 MPH. |
2. **Bridge, Engine and Heavy Car Restrictions—**
- Cars heavier than the following not permitted without authority of Superintendent:
- |                                |              |
|--------------------------------|--------------|
| 40 feet or less in length      | 220,000 lbs. |
| 40 feet to 52.5 feet in length | 263,000 lbs. |
| 52.5 feet or longer            | 315,000 lbs. |
| Between York and McCool Jct.   | 210,000 lbs. |
| Between York and Benedict      | 263,000 lbs. |
- Diesel units in Groups IX and X must not operate on following tracks:
- |                            |            |
|----------------------------|------------|
| Grand Island               | Oil track  |
| Ravenna                    | City track |
| York to Benedict.          |            |
| York MP 135 to McCool Jct. |            |
3. **Train Register Exceptions—**
- Cushman— Trains register when directed by train order.
- Grand Island— Trains originating and terminating will register, through trains register when directed by train order.

4. **Clearance Provisions and Exceptions Rule 83(B)**—None.  
At intermediate locations in CTC territory, Rule 83(B) will not apply when so authorized by train dispatcher.
5. **Rule 99**—When flagging is required, distance will be 1.5 miles.
6. Track between York and McCool Jct. and between York and Benedict is considered industrial track, Rule 105 applies.
7. **MP 1 to MP 4.4 Cushman One Continuous Yard**—  
**Ravenna Passenger Main**—Normal position for all switches between Baird Tower and Cushman is for the main track except switch at west end of B-1 must be left lined for B-1.
8. **Grand Island**—  
When handling 85-foot cars or longer on 17 degree curve of Union Pacific freight house lead and interchange track, beginning 150 feet east of point of switch for freight house lead located in the direct interchange track and continuing westward 550 feet on to the freight house lead track, movement must not exceed 4 MPH. A member of crew must watch movement closely, prepared to give stop signal if any indication of failure to safely negotiate the curve. Particular attention must be given to lateral movement of coupler, as critical point of movement on curve develops when coupler approaches maximum lateral movement permitted by coupler opening.  
Overhang at end of these cars is greater than on other cars and clearances must be watched closely when handling on curves in excess of 16 degrees.
9. Train location line-up not required between Hobson and Ravenna.
10. Stations authorized to duplicate train orders mechanically: Lincoln, Hobson, Grand Island and Ravenna.

## NEBRASKA DIVISION

(Napier—Carling)

### EIGHTH SUBDIVISION

1. **Speed Restrictions**—  

Zone—Between	Maximum Speeds Permitted	Freight
Table Rock and Carling .....	49 MPH.	
Trailing movement through spring switch MP 1.5 Napier .....	25 MPH.	
2. **Bridge, Engine and Heavy Car Restrictions**—  
Cars heavier than the following not permitted without authority of Superintendent:  

40 feet or less in length .....	220,000 lbs.
40 feet to 52.5 feet in length .....	263,000 lbs.
52.5 feet or longer .....	315,000 lbs.

Diesel units in Groups IX and X must not operate on following tracks:

Falls City .....	Roundhouse track
	James track
	Engines must not operate over undertrack unloader on No. 3 track.
Tecumseh .....	No. 2 track
	No. 3 track
3. **Train Register Exceptions**—  
**Napier, Table Rock**—Trains will register when directed by train order.

4. **Clearance Provisions and Exceptions Rule 83(B)**—  
**Napier**—Clearance received at St. Joseph or Forest City clears train at Napier.
5. **Rule 99**—When flagging is required, distance will be:  
**Napier—Table Rock** 1.5 miles.  
**Table Rock—Carling** 2 miles.
6. **Falls City**—Westward movements on main track or siding meeting eastward movements will stop short at end of overlap sign located approximately 360 feet east of westward absolute signal. Westward movements when authorized to proceed must occupy track section immediately forward of overlap sign after which signal will clear if no conflicting route has been established.
7. **Whistle Signals for Hall Tower Interlocking Plant**—  
Hastings main track ..... One long.  
Napier main track ..... One long, one short, one long.  
To wye or inside track .... One long, two shorts, one long.
8. **Hickman**—Missouri Pacific crossing MP 49.7. Normal position of gates against Missouri Pacific trains. Rule 98(A) in effect.
9. Stations authorized to duplicate train orders and train location line-ups mechanically: Carling.

## NEBRASKA DIVISION

(Shubert—Lancaster)

### NINTH SUBDIVISION

1. **Speed Restrictions**—  

Zone—Between	Maximum Speeds Permitted	Freight
Nebraska City and Lancaster .....	30 MPH.	
MP 5 and MP 6.7 between Payne and Dunbar .....	10 MPH.	
Over Missouri Pacific crossing on roundhouse lead at Nebraska City .....	10 MPH.	
Nebraska City and MP 6 (Shubert Line) .....	30 MPH.	
Lincoln—		
Leading car or engine of westbound trains over 27th Street MP 58.5 .....	10 MPH.	
Leading car or engine of trains over 14th Street MP 59.5 .....	5 MPH.	
Item 1A, All Subdivisions applies between MP 59.9 Lancaster and MP 5.0 Nebraska City.		
2. **Bridge, Engine and Heavy Car Restrictions**—  
Cars heavier than the following not permitted without authority of Superintendent:  

Between Shubert and Cooper Spur MP 26.5 .....	177,000 lbs.
Missouri River bridge MP 4.8 .....	210,000 lbs.
<b>Between Lancaster and Cooper Spur MP 26.5—</b>	
40 feet or less in length .....	220,000 lbs.
Over 40 feet long .....	263,000 lbs.
Between Shubert and Arbor and between Payne Jct. switch Nebraska City and Payne bridge derrick 975501 and 250 ton wrecking derrick must not operate.	

3. **Train Register Exceptions—**  
Nebraska City—Trains in through movement will register by register ticket.
4. **Clearance Provisions and Exceptions Rule 83(B)—**  
Shubert, Lancaster—Rule 83(B) does not apply.  
Nebraska City—Trains must receive clearance.
5. **Rule 99—** Unless otherwise provided, protection against following trains is not necessary between Arbor and Shubert. When flagging is required distance will be 1.5 miles.
6. **Lancaster—** Normal position of junction switch is for Eighth Subdivision.
7. Automatic interlocking Nebraska City over Missouri Pacific crossing roundhouse lead.
8. Track between Nebraska City and Payne (5.7 miles) operated as one continuous yard.
9. Payne junction switch at Nebraska City normal position for Shubert.
10. **Arbor—** On Loop track at OPPD Plant, trains must not exceed:  
3 MPH ..... over weigh-in-motion scale.  
5 MPH ..... over unloading trestle. If a slower speed is required, trains will be governed by instructions received from the unloading tower operator via radio.  
If automatic gate is not open on arrival at the power plant, trains must stop short of the weigh-in-motion scale.

## NEBRASKA DIVISION

(Ashland—Sioux City)

### TENTH SUBDIVISION

1. Speed Restrictions—	Maximum Speeds Permitted
<b>Zone—Between</b>	<b>Freight</b>
Ashland and Sioux City .....	49 MPH.
Curve MP 0.3 .....	25 MPH.
Between switches of wye Ashland .....	10 MPH.
Head end of westward trains passing signal governing westward movement at MP 0.5 .....	20 MPH.
Head end of trains passing approach signal at following interlockings:	
<b>Eastward and westward at UP crossing Yutan—MP 15.3</b>	
Freight trains up to 100 Tons/OB .....	25 MPH.
Freight trains over 100 Tons/OB .....	20 MPH.
Eastward trains at UP crossing Fremont MP 30 .....	20 MPH.
<b>Eastward and westward at C&amp;NW crossing Nickerson—MP 35.5—</b>	
Freight trains up to 100 Tons/OB .....	25 MPH.
Freight trains over 100 Tons/OB .....	20 MPH.
Engines or leading car of trains between absolute signals at:	
UP crossing at Yutan .....	20 MPH.

C&NW crossing east of Nickerson .....	20 MPH.
MP 27.7 and MP 28.8 and between MP 58.7 and MP 59.9 Diesel Units in Groups IX and X .....	40 MPH.
MP 28.8 and MP 29.9, Fremont .....	10 MPH.
Over Missouri River Bridge 106.6 .....	10 MPH.
Ferry to MP 107.8 (Leech Avenue Sioux City) .....	25 MPH.
MP 107.8 (Leech Avenue Sioux City) to MP 108.2 (4th St. Sioux City) .....	10 MPH.
MP 108.2 (4th St. Sioux City) to Sioux City .....	25 MPH.
Ashland and Ferry—Bridge derrick 975501 and 250-ton wrecking derrick .....	25 MPH.
Ferry and Sioux City—Bridge derrick 975501 and 250-ton wrecking derrick must not operate, other derricks .....	10 MPH.

### 2. Bridge, Engine and Heavy Car Restrictions—

Cars heavier than the following not permitted without authority of Superintendent:

40 feet or less in length .....	220,000 lbs.
40 feet and over .....	263,000 lbs.

Following are restrictions over Missouri River Bridge No. 2 between Floyd and Sioux City:

Maximum gross weight of cars must not exceed 210,000 pounds without authority of Superintendent.

70-ton hoppers, gondolas or cement hoppers exceeding gross weight of 160,000 pounds must not be handled in blocks of more than four (4) cars. These blocks must be separated from other similar blocks and from locomotive by a minimum of five (5) cars with average gross weight for each car not to exceed 150,000 pounds.

Ore cars loaded with ore must not be handled over this structure without authority of Superintendent.

Following are engine restrictions over the Missouri River Bridge No. 2 between Floyd and Sioux City:

NW-12, SW-15, GP-10, GP-20, GP-38, GP-38-2, GP-30, GP-35, GP-40, A-415, A-424, A-425, U25B, U30B, A-636, U23C, U30C, C-30-7, U25C, U28C, U33C, SD-9, SD-24, SD-40, SD-40-2, SD-45, F-45, E-8, E-9, F40PH, SDP40F, P30CH.

Class engines are prohibited.

Six (6) axle diesel locomotive units not exceeding 300,000 pounds are permitted as a *single* unit consist. Six (6) axle diesel locomotive units exceeding 300,000 pounds are *prohibited*.

Four (4) axle diesel locomotive units not exceeding 250,000 pounds each are permitted as *single* or *two* unit consist. Four (4) axle diesel locomotive units exceeding 250,000 pounds are *prohibited*.

Helper locomotive consist in accordance with above engine restrictions may be placed in train when separated from head end locomotive consist by ten (10) or more cars 40 feet or longer in length.

Diesel units in Groups IX and X must not operate on following tracks nor over Missouri River Bridge at Sioux City:

Ferry .....	Laketon scale track
	South Sioux line track from 600 feet north of switch to end of track

### 3. Train Register Exceptions—

**Ashland—** Trains will register by register ticket except trains entering Third Subdivision through wye in eastward movement will not register.

**Ferry—** Trains will register when directed by train order.

### 4. Clearance Provisions and Exceptions Rule 83(B)—

**Fremont—** Trains must receive clearance.

### 5. Rule 99—

When flagging is required, distance between Ashland-Ferry will be 1.5 miles, between Ferry-Sioux City 1 mile.



6. **Yutan**—When trains meet at Yutan, westward trains holding main track will not pass approach signal until eastward trains are in clear of siding.

7. **Fremont**—

Westward movements which have been delayed at UP or C&NW crossing will notify operator of their intentions to move through interlocking by depressing push button located in box east of track in vicinity of "L" Street.

Eastward trains setting out will stop to clear highway crossing, communicate with operator, and be governed by his instructions.

8. **At Sioux City**—

Interlocking of the Milwaukee Road and the BN direct connection is automatic with the exception that for BN through movements a push button at the BN 26th Street Yard Office should be used to extend the approach on that side in advance of cantilever signal 222.9.

Proceed indication will be received if the route to Ferry is clear and BN movements should not pass a more restrictive signal to avoid blocking Milwaukee and street crossings.

Instructions for operation are posted at the BN 26th Street Yard Office.

9. **Automatic Interlockings not Indicated at Station**—

C&NW crossing 6.3 miles west of Fremont.

10. **Handling 80-Foot or Longer Cars**—

(See Handling 80-foot or Longer Cars, All Subdivisions.)

Between Sioux City and Ferry, eastbound:

Trains of greater than 4600 trailing tons must handle empty cars, 80 feet and longer, in the forward 4600 tons, when helper locomotives are used, except there will be no restriction on the location of such cars when a single unit helper is employed, of 6-powered axles or less.

Certain loaded cars, 80 feet and longer, must be regarded the same as an empty car. (See Item 4, all subdivisions.)

11. **Stations authorized to duplicate train orders and train location line-ups mechanically:** Fremont and Sioux City.

## NEBRASKA DIVISION

(Ferry—O'Neill)

### ELEVENTH SUBDIVISION

1. Speed Restrictions—	Maximum Speed Permitted
Zone—Between	Freight
Ferry and Osmond .....	30 MPH.
Osmond and O'Neill .....	20 MPH.
Item 1A, All Subdivisions, applies.	

2. **Bridge, Engine and Heavy Car Restrictions**—

Cars heavier than 210,000 pounds not permitted without authority of Superintendent.

Between Ferry and O'Neill bridge derrick 975501 and 250-ton wrecking derrick must not operate.

3. **Train Register Exceptions**—

Ferry—Trains will register when instructed by train order.

4. **Clearance Provisions and Exceptions Rule 83(B)**—  
Ferry, O'Neill—Rule 83(B) does not apply.

5. **Rule 99**—Unless otherwise provided, protection against following trains is not necessary. When flagging is required, distance will be 1.5 miles.

## NEBRASKA DIVISION

(Table Rock—Wymore)

### TWELFTH SUBDIVISION

1. Speed Restrictions—	Maximum Speeds Permitted
Zone—Between	Freight
Table Rock and Wymore .....	35 MPH.
Curve on city track Pawnee .....	5 MPH.
<b>Head end of trains passing approach signals to UP crossing MP 84.7—</b>	
Freight trains up to 100 Tons/OB .....	30 MPH.
Freight trains over 100 Tons/OB .....	25 MPH.
Engine or leading car between absolute signals UP crossing MP 84.7 .....	20 MPH.
Between Table Rock and Wymore bridge derrick 975501 and 250-ton wrecking derrick may operate 25 MPH. Other derricks 30 MPH.	
<b>2. Bridge, Engine and Heavy Car Restrictions</b> —	
Cars heavier than the following not permitted without authority of Superintendent:	
40 feet or less in length .....	220,000 lbs.
Over 40 feet long .....	263,000 lbs.
Diesel units in Groups IX and X must not operate on following tracks:	
Wymore .....	House track
	No. 2 repair track
	Belt track
	City track

3. **Train Register Exceptions**—None.

4. **Clearance Provisions and Exceptions Rule 83(B)**—None.

Table Rock—Train order signal does not govern Twelfth Subdivision trains.

5. **Rule 99**—Unless otherwise provided, protection against following trains is not necessary. When required to flag, distance will be 1.5 miles.

6. **Table Rock**—Normal position of junction switch is for Eighth Subdivision.

7. **Pawnee**—Air brakes must be coupled and working on cars handled on city track.

8. **Wymore**—All tracks within yard limits are yard tracks.

9. **Automatic Interlockings not Indicated at Station**—

UP crossing 2.5 miles east of Wymore.

## NEBRASKA DIVISION

(Pappio—Gilmore Jct.)

### THIRTEENTH SUBDIVISION

1. **Speed Restrictions—** Maximum Speeds Permitted  
**Zone—Between** **Freight**  
Pappio and Gilmore Jct. .... 30 MPH.
2. **Bridge, Engine and Heavy Car Restrictions—**  
Cars heavier than the following not permitted without authority of Superintendent:  
40 feet or less in length ..... 220,000 lbs.  
Over 40 feet long ..... 263,000 lbs.  
**Pappio and Gilmore Jct.**—Bridge derrick 975501 and 250-ton wrecking derrick must not operate.
3. **Train Register Exceptions—** None.
4. **Clearance Provisions and Exceptions Rule 83(B)—** None.
5. **Rule 99—** Unless otherwise provided, protection against following trains is not necessary. When required to flag distance will be 1.5 miles.
6. Trains and engines between Gilmore Jct. and South Omaha are governed by Union Pacific Bridge Subdivision Rules for employees of Tenant Lines.
7. **South Omaha—** Four short and one long blast of whistle for UP switches.

## NEBRASKA DIVISION

(Brick Yard—Sargent)

### FOURTEENTH SUBDIVISION

1. **Speed Restrictions—** Maximum Speeds Permitted  
**Zone—Between** **Freight**  
Brick Yard and Sargent ..... 30 MPH.  
Trains using east wye track MP 26.3 to Fourth Subdivision ... 35 MPH.  
Eastward engine or leading car between absolute signals of Jct. Switch MP 27.1 ..... 20 MPH.  
Aurora and Brick Yard bridge derrick 975501, 250-ton wrecking derrick and other derricks may operate ..... 20 MPH.  
At UP interlocking Central City, engine or leading car between approach and absolute signal, and between absolute signals ..... 20 MPH.  
**MP 15.5 and MP 23.6, MP 28.8 and 30.1, MP 40.3 and Sargent—**  
Diesel engines GP-7 and GP-9 ..... 15 MPH.  
Diesel engines SD-7 and SD-9 ..... 20 MPH.  
Item 1A, All Subdivisions, applies.
2. **Bridge, Engine and Heavy Car Restrictions—**  
Cars heavier than the following not permitted without authority of Superintendent:  
40 feet or less in length ..... 220,000 lbs.  
Over 40 feet long ..... 263,000 lbs.

**Between Palmer and Sargent—**

35 feet or over in length ..... 220,000 lbs.

Between Aurora and Sargent bridge derrick 975501 and 250-ton wrecking derrick must not operate.

Diesel units in Groups IX and X must not operate on following tracks:

Giltner ..... Elevator track

Trumbull ..... Elevator track  
House track

3. **Train Register Exceptions—** None.
4. **Clearance Provisions and Exceptions Rule 83(B)—**  
**Brick Yard—** Clearance received at Hastings Tower clears train at Brick Yard.  
**Aurora—** Trains must receive clearance.  
**Palmer, Sargent—** Rule 83(B) does not apply.
5. **Rule 99—** Unless otherwise provided, protection against following trains is not necessary between Aurora and Sargent.  
When flagging is required between Brick Yard-Sargent distance will be 1.5 miles.
6. Lights on train order signals will not be displayed.
7. **Central City—**  
**BN, UP crossing—** BN train and engine movements approaching crossing, from either direction, must stop at absolute signal. After stopping trainman or engineer will proceed to crossing and operate the plant in accordance with instructions posted at the crossing.

## NEBRASKA DIVISION

(Palmer—Burwell)

### FIFTEENTH SUBDIVISION

1. **Speed Restrictions—** Maximum Speeds Permitted  
**Zone—Between** **Freight**  
Palmer and Burwell ..... 30 MPH.  
Item 1A, All Subdivisions, applies.
2. **Bridge, Engine and Heavy Car Restrictions—**  
Cars heavier than the following not permitted without authority of Superintendent:  
Maximum gross weight of cars handled must not exceed 220,000 pounds.  
Single units only over Bridge 40.7, west of Palmer.
3. **Train Register Exceptions—** None.
4. **Clearance Provisions and Exceptions Rule 83(B)—**  
**Palmer, Burwell—** Rule 83(B) does not apply.
5. **Rule 99—** Unless otherwise provided, protection against following trains is not necessary. When required to flag, distance will be 1.5 miles.

# NEBRASKA DIVISION

(DeWitt—Hildreth)

## SIXTEENTH SUBDIVISION

1. **Speed Restrictions—** Maximum Speeds Permitted  
**Zone—Between** **Freight**  
DeWitt and Edgar ..... 25 MPH.  
Edgar and Hildreth ..... 35 MPH.  
Tobias and Daykin ..... 20 MPH.  
Derricks Tobias to Daykin ..... 10 MPH.  
Edgar and Nelson ..... 20 MPH.  
GP-7 and GP-9 engines between Edgar and Nelson ..... 15 MPH.  
Derricks Edgar and Nelson ..... 10 MPH.  
Engine or leading car between absolute signals of UP Crossing MP 57.3 ..... 15 MPH.  
Over Bridges 1.58, 65.84 and 98.30, GP-7, GP-9 and SD-7 engines (not exceeding two units) and SD-9 engines (single unit) ..... 10 MPH.  
Item 1A, All Subdivisions, applies.
2. **Bridge, Engine and Heavy Car Restrictions—**  
Cars heavier than the following not permitted without authority of Superintendent:  
40 feet or less in length ..... 220,000 lbs.  
Over 40 feet long ..... 263,000 lbs.  
Maximum gross weight of cars handled between DeWitt and Swanton and between Edgar and Hildreth must not exceed 215,000 pounds.  
Bridge derrick 975501 and 250-ton wrecking derrick must not operate.
3. **Train Register Exceptions—**  
**Strang**—Trains register when directed by train order. Train register located at north switch west wye.
4. **Clearance Provisions and Exceptions Rule 83(B)—**  
**Hildreth, Tobias, Strang**—Rule 83(B) does not apply.
5. **Rule 99**—Unless otherwise provided, protection against following trains is not necessary. When required to flag, distance will be 1.5 miles.
6. Track between Edgar and Nelson also between Tobias and Daykin is considered industrial track, Rule 105 applies. Line-up issued for Sixteenth Subdivision will cover.
7. **DeWitt**—Train order signal does not govern Sixteenth Subdivision trains. Normal position of junction switch is for Sixth Subdivision.
8. **Strang**—Normal position of east and west wye switches of east wye on the Sixteenth Subdivision is for the Sixteenth Subdivision.  
Normal position of the south switch east wye is for the west leg of wye.  
Normal position of east and west wye switches of west wye on the Sixteenth Subdivision is for the east and west legs of wye.  
Normal position of the north switch west wye is for the west leg of wye.
9. **Blue Hill**—Normal position of junction switch (MP 86.8 and MP 87) is for the Nineteenth Subdivision.

# NEBRASKA DIVISION

(Lincoln—Columbus)

## SEVENTEENTH SUBDIVISION

1. **Speed Restrictions—** Maximum Speeds Permitted  
**Zone—Between** **Freight**  
West Lincoln and MP 25.3 Seward ..... 25 MPH.  
MP 25.3 Seward and Columbus ..... 30 MPH.  
Item 1A, All Subdivisions, applies.
2. **Bridge, Engine and Heavy Car Restrictions—**  
Cars heavier than the following not permitted without authority of Superintendent:  
40 feet or less in length ..... 220,000 lbs.  
Over 40 feet long ..... 263,000 lbs.  
Bridge derrick 975501 and 250-ton wrecking derrick must not operate.  
Maximum gross weight of cars handled between Moll Spur and Columbus must not exceed 220,000 pounds
3. **Train Register Exceptions—** None.
4. **Clearance Provisions and Exceptions Rule 83(B)—**  
**West Lincoln**—Clearance received at Carling clears train at West Lincoln.
5. **Rule 99**—Unless otherwise provided, protection against following trains is not necessary. When required to flag, distance will be 1.5 miles.
6. While operating on Union Pacific track at Lincoln Burlington Northern employees must comply with instructions issued by Union Pacific supervisors, but will be governed by Burlington Northern rules, except for the following Union Pacific rules:  
**Dual Control Switches—**  
**275:** When a train or engine is stopped by a signal governing movement over a dual control switch and no conflicting movement is evident, a member of the crew must immediately communicate with the control operator and be governed by his instructions. Such instructions must include information as to the route to be used.  
When authorized to proceed, movement must be made at restricted speed to the next signal. Before proceeding, selector lever on all dual control switches over which movement is to be made must be placed in "HAND" position. Hand throw lever on each such switch must be operated until switch points are seen to move with the movement of the lever. Switches must be lined for the route to be used. As soon as leading wheels are 100 feet past the stop signal, selector levers on all switches may be restored to "MOTOR" position and locked.  
**276:** Dual control switches must not be operated by hand without authority from the control operator except when communication has failed.  
When necessary to operate a dual control switch by hand to perform switching, the time switch may be used and the limits of the movement must be clearly stated and understood. When possible, first move must be made on signal indication.  
Selector lever on all switches over which movement is to be made must then be placed in "HAND" position and must be left in that position until all movements have been completed.  
After all movements have been completed, selector levers on all switches must be restored to "MOTOR" position and control operator must be so advised.  
During the time selector lever is in "HAND" position, indications of Stop signals governing movement over the switch may be considered suspended, but all movements must be made at restricted speed.

**277:** Except as provided in Rule 276, a train or engine must not make a reverse movement, or a forward movement after making a reverse movement, over a dual control switch, except on signal indication, or with permission from control operator.

5. **Rule 99**—When flagging is required, distance will be 1.5 miles. Unless otherwise provided, protection against following trains is not necessary between Odell Jct. and Lester Jct.

6. Lights on train order signals will not be displayed.

7. **Chester**—Trains or engines passing through Chester on any track other than main track must stop before crossing Thayer Avenue.

Member of crew must flag trains or engines across entire width of street.

8. **Superior** – Within the corporate limits, cars or engines must not be left standing less than 40 feet from street line and switching or light engine movements over Central Avenue and Bloom Streets must be protected by member of crew.

Missouri Pacific crossing MP 171. Normal position of gate is against MP trains. Rule 98(A) in effect.

9. **Lester Jct.**—Normal position of junction switch is for Nineteenth Sub-division.

10. **Wymore**—All tracks within yard limits are yard tracks.

- 11. Automatic Interlocking not Indicated at Station—**  
CRI&P crossing 8.9 miles west of Fairchild Spur.

(Wymore—Red Cloud)

1. <b>Speed Restrictions—</b>	<b>Maximum Speeds Permitted</b>
<b>Zone—Between</b>	<b>Freight</b>
Wymore and Red Cloud . . . . .	35 MPH.
Engine or leading car between absolute signals of UP crossing MP 114.9 . . . . .	15 MPH.
Engine or leading car between absolute signals CRI&P crossing MP 125 . . . . .	20 MPH.
Engine or leading car over Central Avenue and Bloom Street Superior . . . . .	5 MPH.
Engine or leading car between absolute signals Missouri Pacific crossing MP 171 . . . . .	20 MPH.
Bridge derrick 975501 and 250-ton wrecking derrick . . . . .	25 MPH.
Other derricks . . . . .	30 MPH.
Diesel units in Groups IX and X between Endicott and Red Cloud . . . . .	30 MPH.

- 2. Bridge, Engine and Heavy Car Restrictions—**  
Cars heavier than the following not permitted without authority of Superintendent:
- |                                 |              |
|---------------------------------|--------------|
| 40 feet or less in length ..... | 220,000 lbs. |
| Over 40 feet long .....         | 263,000 lbs. |
- Diesel units in Groups IX and X must not operate on following tracks:
- |                 |                |
|-----------------|----------------|
| Krider .....    | House track    |
| Odell .....     | House track    |
| Diller .....    | Elevator track |
| Chester .....   | House track    |
|                 | Elevator track |
| Superior .....  | Stock track    |
| Bostwick .....  | Elevator track |
| Red Cloud ..... | Turkey track   |

- 3. Train Register Exceptions—**  
**Odell Jct., Lester Jct.**—Trains will register when directed by train order.

- #### 4. Clearance Provisions and Exceptions Rule 83(B) —

**Odell Jct., Lester Jct.**—Rule 83(B) does not apply.

**Red Cloud**—Trains must receive clearance when operator on duty. Operator on duty 9:00 a.m. until 6:00 p.m. Monday through Friday.

(Hastings—Lester Jct.)

## NINETEENTH SUBDIVISION

- |   |                                 |
|---|---------------------------------|
| <b>1. Speed Restrictions—</b>   | <b>Maximum Speeds Permitted</b> |
| <b>Zone—Between</b>   | <b>Freight</b>                  |
| Hastings and Lester Jct. ....   | 30 MPH.                         |
| Engine or leading car of eastward trains over highway crossing at MP 1 .....                            | 5 MPH.                          |
| Through turnout Lester Jct. ....  | 10 MPH.                         |
| Diesel units in Groups IX and X .....   | 25 MPH.                         |
| Bridge derrick 975501 and 250-ton derricks may operate except must not exceed 10 MPH over bridge 34.33. |                                 |
| Item 1A, All Subdivisions, applies between MP 0.7 Hastings and MP 37.0 Lester Jct.                      |                                 |

- ## 2. Bridge, Engine and Heavy Car Restrictions—

Cars heavier than the following not permitted without authority of Superintendent:

- |                                     |              |
|-------------------------------------|--------------|
| 40 feet or less in length . . . . . | 220,000 lbs. |
| Over 40 feet long . . . . .         | 263,000 lbs. |

**Diesel units in Groups IX and X must not operate on following tracks:**

Cowles . . . . . House track

Blue Hill . . . . . Elevator track

Avr ..... City track

3. **Train Register Exceptions—**  
**Ayr Jct.**—Trains will register when directed by train order. Train register located at junction switch.  
**Lester Jct.**—Trains will register when directed by train order.
4. **Clearance Provisions and Exceptions Rule 83(B)—**  
**Lester Jct., Ayr Jct.**—Rule 83(B) does not apply.
5. **Rule 99**—When flagging is required, distance will be 1.5 miles. Unless otherwise provided, protection against following trains is not necessary between Ayr Jct. and Lester Jct.

## NEBRASKA DIVISION

(Odell Jct. — Concordia)

### TWENTIETH SUBDIVISION

1. **Speed Restrictions—** Maximum Speeds Permitted  
**Zone—Between** **Freight**  
Engine or leading car between absolute signals UP Crossing  
MP 12.8 ..... 15 MPH.
2. **Bridge, Engine and Heavy Car Restrictions—**  
Cars heavier than the following not permitted without authority of Superintendent:  
35 feet or over in length ..... 177,000 lbs.  
Bridge derrick 975501 and 250-ton wrecking derricks must not operate.  
Single unit engines only may be operated.
3. **Train Register Exceptions—**  
**Odell Jct.**—Trains will register when directed by train order.
4. **Clearance Provisions and Exceptions Rule 83(B)—**  
**Odell Jct.**—Rule 83(B) does not apply.
5. **Rule 99**—Unless otherwise provided, protection against following trains is not necessary. When required to flag, distance will be 1.5 miles.
6. **Concordia**—Trains or engines must stop before crossing Washington and Cedar Streets and member of crew must flag across entire width of street.
7. **Odell Jct.**—Normal position junction switch is for the Eighteenth Subdivision.

## NEBRASKA DIVISION

(Bigelow — Maitland)

### TWENTY-FIRST SUBDIVISION

1. **Speed Restrictions—** Maximum Speeds Permitted  
**Zone—Between** **Freight**  
Bigelow and Maitland ..... 25 MPH.

Engines over Bridge N-1.2 .....	10 MPH.
Maitland MP 14.5 Elm Street .....	5 MPH.
Derricks .....	10 MPH.

2. **Bridge, Engine and Heavy Car Restrictions—**  
Maximum gross weight of cars handled must not exceed 210,000 lbs. without authority of Superintendent.  
Bridge derrick 975501 and 250-ton derricks must not be operated.
3. **Train Register Exceptions—None.**
4. **Clearance Provisions and Exceptions Rule 83(B)—None.**
5. **Rule 99**—Unless otherwise provided, protection against following trains is not necessary. When required to flag distance will be 1 mile.

## NEBRASKA DIVISION

(Corning — Tarkio)

### TWENTY-SECOND SUBDIVISION

1. **Speed Restrictions—** Maximum Speeds Permitted  
**Zone—Between** **Freight**  
Corning and Tarkio MP 15.5 ..... 25 MPH.  
MP 1.9 and MP 3 ..... 10 MPH.  
Engine heavier than 600 HP over Bridge 12.7 ..... 10 MPH.  
Derricks ..... 10 MPH.
2. **Bridge, Engine and Heavy Car Restrictions—**  
Maximum gross weight of cars handled must not exceed 220,000 lbs. without authority of Superintendent.  
Bridge derrick 975501 and 250-ton wrecking derricks must not be operated.
3. **Train Register Exceptions—None.**
4. **Clearance Provisions and Exceptions Rule 83(B)—None.**
5. **Rule 99**—Unless otherwise provided, protection against following trains is not necessary. When required to flag distance will be 1 mile.

## NEBRASKA DIVISION

(Ashland — Prague)

### TWENTY-THIRD SUBDIVISION

1. **Speed Restrictions—** Maximum Speeds Permitted  
**Zone—Between** **Freight**  
Ashland and MP 3 ..... 25 MPH.  
Over Bridge 0.9 ..... 15 MPH.

Derricks ..... 10 MPH.  
Item 1A, All Subdivisions, applies.

**2. Bridge, Engine and Heavy Car Restrictions—**

Maximum gross weight of cars handled must not exceed 210,000 pounds without authority of Superintendent.

Bridge derrick 975501 and 250-ton wrecking derricks must not be operated.

**3. Train Register Exceptions—None.**

**4. Clearance Provisions and Exceptions Rule 83(B)—None.**

**5. Rule 99—** Unless otherwise provided, protection against following trains is not necessary. When required to flag, distance will be 1 mile.

**6. Wahoo—**

Manually operated railroad crossing gate has been installed across BN and C&NW branch main tracks at MP 18.6. Normal position of gate will be across BN and C&NW tracks. Crews must restore gate to this position after movement is made across UP tracks.

Rules 98, 98(A) and 98(B) in effect.

## NEBRASKA DIVISION

(Auburn—Tecumseh)

### TWENTY-FOURTH SUBDIVISION

<b>1. Speed Restrictions—</b>	Maximum Speeds Permitted
<b>Zone—Between</b>	<b>Freight</b>
Auburn and Tecumseh .....	30 MPH.
Derricks .....	10 MPH.

**2. Bridge, Engine and Heavy Car Restrictions—**

Maximum gross weight of cars handled must not exceed 220,000 lbs. without authority of Superintendent.

Bridge derrick 975501 and 250-ton wrecking derricks must not be operated.

**3. Train Register Exceptions—None.**

**4. Clearance Provisions and Exceptions Rule 83(B)—None.**

**5. Rule 99—** Unless otherwise provided, protection against following trains is not necessary. When required to flag distance will be 1 mile.

## NEBRASKA DIVISION

(Fairmont—Tobias)

### TWENTY-FIFTH SUBDIVISION

<b>1. Speed Restrictions—</b>	Maximum Speeds Permitted
<b>Zone—Between</b>	<b>Freight</b>
Fairmont and Tobias .....	25 MPH.
Derricks .....	10 MPH.
Item 1A, All Subdivisions, applies.	

**2. Bridge, Engine and Heavy Car Restrictions—**

Maximum gross weight of cars handled must not exceed 263,000 lbs. without authority of Superintendent.

Bridge derrick 975501 and 250-ton wrecking derricks must not be operated.

**3. Train Register Exceptions—None.**

**4. Clearance Provisions and Exceptions Rule 83(B)—None.**

**5. Rule 99—** Unless otherwise provided, protection against following trains is not necessary. When required to flag, distance will be one mile.

**6. Fairmont—** Normal position of junction switch east end is for Twenty-fifth Subdivision.

## NEBRASKA DIVISION

(Clay Center—Lushton)

### TWENTY-SIXTH SUBDIVISION

<b>1. Speed Restrictions—</b>	Maximum Speed Permitted
<b>Zone—Between</b>	<b>Freight</b>
Clay Center and Sutton .....	30 MPH.
Sutton and Lushton .....	10 MPH.

**2. Bridge, Engine and Heavy Car Restrictions—**

Cars heavier than the following not permitted without authority of Superintendent.

Between Clay Center and Sutton ..... 263,000 lbs.

Between Sutton and Lushton ..... 177,000 lbs.

Bridge derrick 975501 and 250-ton wrecking derricks must not be operated.

**3. Train Register Exceptions—None.**

**4. Clearance Provisions and Exceptions Rule 83(B)—None.**

**5. Rule 99—** Unless otherwise provided, protection against following trains is not necessary. When required to flag distance will be 1 mile.

## NEBRASKA DIVISION

(Ayr Jct. — Huntley)

### TWENTY-SEVENTH SUBDIVISION

1. **Speed Restrictions —**  

Zone — Between	Maximum Speeds Permitted
	Freight
Ayr Jct. and South Minden .....	30 MPH.
South Minden and Huntley .....	10 MPH.
2. **Bridge, Engine and Heavy Car Restrictions —**  
**Between Ayr Junction and South Minden —**  
Cars heavier than the following not permitted without authority of Superintendent:  
40 feet or less in length ..... 220,000 lbs.  
Over 40 feet long ..... 263,000 lbs.  
**Between South Minden and Huntley —**  
Maximum gross weight of cars handled must not exceed 210,000 lbs. without authority of Superintendent.  
Engines heavier than SD-7 cannot operate beyond South Minden.  
Bridge derrick 975501 and 250-ton wrecking derricks must not be operated.
3. **Train Register Exceptions —** None.
4. **Clearance Provisions and Exceptions Rule 83(B) —**  
Ayr Jct., Huntley — Rule 83(B) does not apply.
5. **Rule 99 —** Unless otherwise provided, protection against following trains is not necessary. When required to flag distance will be 1 mile.

## COLORADO DIVISION

(Hastings — McCook)

### FIRST SUBDIVISION

1. **Speed Restrictions —**  

Zone — Between	Maximum Speeds Permitted	
	Passenger	Freight
Passenger trains .....	79 MPH.	
MP 156 to MP 157 .....	25 MPH.	25 MPH.
MP 157 to MP 158 .....		30 MPH.
Crossover and turnouts MP 156.4 .....	15 MPH.	15 MPH.
Turnout west end of No. 1 track MP 158 .....	30 MPH.	30 MPH.
Turnout end of two main tracks Gaines .....	40 MPH.	40 MPH.
MP 219.5 and MP 230.5 .....	70 MPH.	50 MPH.
Curve MP 228 .....	65 MPH.	50 MPH.
Curve MP 229.5 .....	65 MPH.	50 MPH.
Head end of trains over Ogden Avenue Oxford MP 233.8 .....	50 MPH.	50 MPH.
MP 286.6 and MP 287.2 .....		30 MPH.
MP 287.2 and MP 287.8 .....	30 MPH.	30 MPH.
Diesel units in Groups IX and X on sidings at Kenesaw, Axtell and Holdrege (south side) .....	25 MPH.	25 MPH.
Trains must not exceed 25 MPH through turnouts of controlled sidings.		
<b>Holdrege —</b> Westward siding trains must not exceed 10 MPH until leading car or engine occupies East Avenue crossing.		
<b>Eastward siding trains</b> must stop before crossing East Avenue crossing unless movement is protected by an employee at crossing.		
<b>Head end of eastward trains passing signal at MP 235.2 —</b>		
Freight trains up to 100 Tons/OB .....		55 MPH.
Freight trains over 100 Tons/OB .....		45 MPH.
2. **Bridge, Engine and Heavy Car Restrictions —**  
Cars heavier than the following not permitted without authority of Superintendent:  
40 feet or less in length ..... 220,000 lbs.  
40 feet to 52.5 feet in length ..... 263,000 lbs.  
52.5 feet or longer ..... 315,000 lbs.  
Diesel units in Groups IX and X must not operate on following tracks:  
Juniata ..... South house track    Holdrege ..... Cob track  
Kenesaw ..... Stock track    McCook ..... Mill track
3. **Train Register Exceptions —**  
**Gaines —** Trains originating and terminating will register.  
**Oxford —** Register station for trains originating or terminating.
4. **Clearance Provisions and Exceptions Rule 83(b) —**  
**Oxford —** Trains from Fourth Subdivision must receive clearance when operator on duty. Operator on duty 7:30 a.m. until 4:30 p.m. Monday through Friday.  
**Hastings Tower —** Trains originating at Hastings and Gaines and through trains must receive clearance.  
At intermediate locations in CTC territory Rule 83(B) will not apply when so authorized by train dispatcher.
5. **Rule 99 —** When flagging is required, distance will be 2 miles.

6. **Oxford**—Freight trains stopping at Oxford must not block Ogden Avenue crossing Monday through Friday between the hours of 12:00 Noon until 1:00 p.m. and 3:45 p.m. until 4:30 p.m.
7. Stations authorized to duplicate train orders and train location line-ups mechanically: Hastings Tower and McCook.

## COLORADO DIVISION

(McCook — Denver)

### SECOND SUBDIVISION

1. Speed Restrictions —	Maximum Speeds Permitted	
Zone — Between	Passenger	Freight
Passenger trains .....	79 MPH.	
MP 287.8 to MP 288.5 .....	30 MPH.	30 MPH.
Curve MP 288.8 .....	65 MPH.	50 MPH.
MP 288.5 and MP 289 .....	70 MPH.	50 MPH.
MP 430.5 and MP 431.5 .....	50 MPH.	40 MPH.
MP 431.5 and MP 434 .....	65 MPH.	50 MPH.
Brush—Entering Sterling main tracks .....	15 MPH.	15 MPH.
Brush on Sterling main track over Clayton Street crossing .....	10 MPH.	10 MPH.
Curve MP 506.4 .....	70 MPH.	50 MPH.
Head end or leading car over 72nd Avenue crossing MP 535.3 .....	40 MPH.	40 MPH.
MP 535.9 and MP 539.7 .....	60 MPH.	50 MPH.
Over UP crossing MP 537.3 .....	60 MPH.	30 MPH.
Head end or leading car over 56th Avenue crossing MP 538 .....	40 MPH.	40 MPH.
MP 539.7 to signal MP 541.7 .....	30 MPH.	15 MPH.
Signal 541.7 to 21st Street MP 541.9 .....	15 MPH.	15 MPH.
Diesel units in Groups IX and X on siding Wray ...		25 MPH.
Ladora yard tracks—On tangent track between gate and classification yard .....		10 MPH.
Trains must not exceed 25 MPH through turnouts of controlled sidings except Wray controlled siding .....	20 MPH.	20 MPH.
<b>Head end of eastward train passing signal at MP 498.3—</b>		
Freight trains up to 100 Tons/OB .....		55 MPH.
Freight trains over 100 Tons/OB .....		45 MPH.

### 2. Bridge, Engine and Heavy Car Restrictions—

Cars heavier than the following not permitted without authority of Superintendent:

40 feet or less in length .....	220,000 lbs.
40 feet to 52.5 feet in length .....	263,000 lbs.
52.5 feet or longer .....	315,000 lbs.
Diesel units in Groups IX and X must not operate on following tracks:	
Wray .....	Mill track
Brush .....	Oil track

Moseley .....	Stock track
Fort Morgan .....	South house track
Tampa Spur .....	Entire spur except 600 feet of tail track off wye
Tonville .....	Beet track
Barr .....	House track

### 3. Train Register Exceptions—

**Akron**—First class trains will not register at Akron.

**Brush**—Register station for all trains originating or terminating.

**Denver**—Trains originating or terminating at 31st Street yard will register.

### 4. Clearance Provisions and Exceptions Rule 83(B)—

**Denver**—Trains originating obtain clearance at 31st Street.

**Akron**—Unless otherwise provided, train crews arriving at Akron must deliver all clearances, train orders, and messages to relieving crew.

**Brush**—Rule 83(B) does not apply to trains off Seventh Subdivision en-route Second Subdivision.

At intermediate locations in CTC territory Rule 83(B) will not apply when so authorized by train dispatcher.

### 5. Rule 99—When flagging is required, distance will be 2 miles.

6. **Brush**—At MP 456.2, west switch No. 1 track, spring switch replaced with hand-throw switch and controlled electric lock. Westward movement from No. 1 track must receive signal indication after No. 1 track switch has been properly lined by hand. Eastward movement must receive signal indication to advance to No. 1 track switch.

7. **Ladora**—Member of crew will protect switching movements over highway No. 2.

8. **Commerce City**—Trains using industry tracks must stop not more than 40 feet from 72nd Street crossing before moving over crossing.

9. **Denver**—All trains and engines at highways or street intersections with railroad tracks, where official traffic control devices are installed, must move into the intersection or highway only on clear (green light) traffic signal.

Trains or engines using Denver Union Terminal Railway Company's track must provide themselves with copy of and be governed by General and Interlocking rules of that Company.

10. Stations authorized to duplicate train orders and train location line-ups mechanically: McCook and 31st Street Denver.

## COLORADO DIVISION

(Orleans Jct.—St. Francis)

### THIRD SUBDIVISION

1. Speed Restrictions —	Maximum Speeds Permitted	
Zone — Between		Freight
Orleans Jct. and St. Francis .....		30 MPH.
Loaded tank cars .....		25 MPH.
Engine or leading car over highway crossing Atwood .....		10 MPH.



Over Bridge 2.2 ..... 20 MPH.

**2. Bridge, Engine and Heavy Car Restrictions—**

Cars heavier than the following not permitted without authority of Superintendent:

40 feet or less in length ..... 220,000 lbs.  
Over 40 feet long ..... 263,000 lbs.

Diesel units in Groups IX and X must not operate between Flynn and St. Francis.

Between Orleans and St. Francis bridge derrick 975501 and 250-ton wrecking derricks must not operate.

**3. Train Register Exceptions—None.**

**4. Clearance Provisions and Exceptions Rule 83(B)—**

Orleans Jct., Flynn—Rule 83(B) does not apply.

**Cedar Bluffs MP 62.3**—Unless otherwise provided, train crews arriving Cedar Bluffs must deliver all clearances, train orders and messages to relieving crew.

**5. Rule 99**—Unless otherwise provided, protection against following trains is not necessary. When required to flag, distance will be 1.5 miles.

**6. Lights on train order signals will not be displayed.**

**3. Train Register Exceptions—None.**

**4. Clearance Provisions and Exceptions Rule 83(B)—**

**Red Cloud**—Trains must receive clearance when Operator on duty. Operator on duty 9:00 a.m. until 6:00 p.m. Monday through Friday.

**Orleans Jct., Oxford Jct.**—Rule 83(B) does not apply.

**5. Rule 99**—Unless otherwise provided, protection against following trains is not necessary. When required to flag, distance will be 1.5 miles.

**6. Lights on train order signals will not be displayed.**

**7. Eastward trains or engines passing absolute signal Oxford Jct. governing eastward movement to Fourth Subdivision on authority of train dispatcher per Rule 269, must proceed at restricted speed to absolute signal MP 247.8 Orleans Jct.**

Westward trains or engines passing absolute signals Orleans Jct. governing westward movements on Fourth Subdivision and from Third Subdivision on authority of train dispatcher per Rule 269, must proceed at restricted speed to absolute signal MP 257.2 Oxford Jct.

## COLORADO DIVISION

(Red Cloud—Oxford Jct.)

### FOURTH SUBDIVISION

**1. Speed Restrictions—** Maximum Speeds Permitted

**Zone—Between** **Freight**

Red Cloud and MP 227 ..... 35 MPH.

MP 227 and MP 246 ..... 49 MPH.

MP 246 and Oxford Jct. .... 35 MPH.

Diesel units in Groups IX and X—

Red Cloud and Riverton and Orleans and Oxford Jct. .... 30 MPH.

Over switch Oxford Jct. .... 20 MPH.

Bridge derrick 975501 and 250-ton wrecking derrick must not exceed 25 MPH, other derricks 30 MPH.

**2. Bridge, Engine and Heavy Car Restrictions—**

Cars heavier than the following not permitted without authority of Superintendent:

40 feet or less in length ..... 220,000 lbs.  
Over 40 feet long ..... 263,000 lbs.

Diesel units in Groups IX and X must not operate on following tracks:

Red Cloud ..... Turkey track

Inavale ..... House track

Riverton ..... House track

Orleans ..... Yard track No. 3  
Yard track No. 4

## COLORADO DIVISION

(Flynn—Oberlin)

### FIFTH SUBDIVISION

**1. Speed Restrictions—** Maximum Speeds Permitted

**Zone—Between** **Freight**

Flynn and Almena Jct. .... 30 MPH.

Oronoque and Oberlin ..... 30 MPH.

Eastward engine or leading car between absolute signals of junction switch MP 3.3 ..... 20 MPH.

Engine or leading car over street crossings in Norton city limits ..... 5 MPH.

**2. Bridge, Engine and Heavy Car Restrictions—**

Cars heavier than the following not permitted without authority of Superintendent:

40 feet or less in length ..... 220,000 lbs.  
Over 40 feet long ..... 263,000 lbs.

Diesel units in Groups IX and X must not operate on following tracks:

Long Island ..... House track

Almena ..... House track

Norton ..... BN trackage

Diesel units in Groups IX and X must not operate between Oronoque and Oberlin.

Between Flynn and Oberlin bridge derrick 975501 and 250-ton wrecking derricks must not operate.

**3. Train Register Exceptions—None.**

**4. Clearance Provisions and Exceptions Rule 83(B)—**

Flynn—Rule 83(B) does not apply.

**Almena**—CRI&P train orders and clearances will be delivered to westward BN trains.

**Norton and Norcat**—CRI&P train orders and clearances delivered to BN trains by BN operator.

5. **Rule 99**—Unless otherwise provided, protection against following trains is not necessary. When required to flag, distance will be 1.5 miles.
6. BN junction switches at Almena Jct., both switches of CRI&P siding, Norton and Oronoque, are equipped with electric switch locks controlled by CRI&P operator at Norton. Telephone with instructions at same locations.
7. **Norton**—All trains will stop at highway crossing just west of city limits and flag movement over crossing.

## COLORADO DIVISION

(Holdrege—Sterling)

### SIXTH SUBDIVISION

1. **Speed Restrictions—**

Zone—Between	Maximum Speeds Permitted
Holdrege and MP 24 .....	25 MPH.
MP 24 and MP 113.4 .....	30 MPH.
MP 113.4 and MP 146 .....	40 MPH.
MP 146 and MP 157.4 .....	25 MPH.
MP 157.4 and MP 183 .....	40 MPH.
MP 183 and MP 212.5 .....	25 MPH.
MP 212.5 and MP 225.5 .....	40 MPH.
MP 225.5 and Sterling .....	25 MPH.
Wallace and Gentlemen Power Plant .....	40 MPH.
Curves 16 and 17 Gentlemen Industrial Track .....	25 MPH.
Haxtun, engine or leading car over Washington Street second crossing east of depot .....	10 MPH.
Between Holdrege and Wallace handling loaded covered hoppers, trains must not exceed 25 MPH between MP 72 and MP 114.	
2. **Bridge, Engine and Heavy Car Restrictions—**

Cars heavier than the following not permitted without authority of Superintendent:

40 feet or less in length .....	220,000 lbs.
Over 40 feet long .....	263,000 lbs.

Diesel units in Groups IX and X must not operate between Holdrege and MP 111.

Between Holdrege and Wallace bridge derrick 975501 and 250-ton wrecking derrick must not operate.
3. **Train Register Exceptions—**

**Grant**—Trains will register when directed by train order. Train register located in depot.

**Wallace Jct.**—Trains will register when directed by train order. Train register located in booth at junction switch MP 113.5.
4. **Clearance Provisions and Exceptions Rule 83(B)—**

**Wallace Jct.**—Rule 83(B) does not apply.

**Curtis**—Unless otherwise provided, train crews arriving at Curtis must deliver all clearances, train orders, and messages to relieving crew.

5. **Rule 99**—When required to flag between Sterling and Wallace and between Wallace and Gentlemen Power Plant, the distance will be 2 miles. Between Wallace and Holdrege, the distance will be 1.5 miles.
6. Lights on train order signals will not be displayed.
7. Track between Wallace Jct. and Gentlemen Power Plant is considered industrial track, Rule 105 applies. Line-up issued for Sixth Subdivision will cover.
8. Stations authorized to duplicate train orders and train location line-ups mechanically: Sterling.
9. **Gentlemen Power Plant—**

Security gate located at MP 17.6 is operated automatically by train movement into or out of plant. Indicators at gate will display green for entering and leaving plant if gate is open for movement or red if gate is not open. Approach indicator at MP 16.7 for entering plant will display yellow if gate is not open and green for open. If gate fails to open train crew should be governed by instructions from employee waiting for train at gate.

## COLORADO DIVISION

(Sterling—Brush)

### SEVENTH SUBDIVISION

1. **Speed Restrictions—**

Zone—Between	Maximum Speeds Permitted
Union and Brush .....	49 MPH.
Over Bridge 139.9 .....	30 MPH.
Westward engine or leading car between absolute signals junction switch MP 150 .....	20 MPH.
2. **Bridge, Engine and Heavy Car Restrictions—**

Cars heavier than the following not permitted without authority of Superintendent:

40 feet or less in length .....	220,000 lbs.
40 feet to 52.5 feet in length .....	263,000 lbs.
52.5 feet or longer .....	315,000 lbs.

Diesel units in Groups IX and X must not operate on following tracks:

Sterling .....	Welsh elevator
	Caboose track
	Dago No. 1
	Dago No. 2
3. **Train Register Exceptions—**

**Brush**—Trains may register by register ticket.
4. **Clearance Provisions and Exceptions Rule 83(B)—**

**Sterling**—In addition to BN clearance, trains must receive UP clearance.

**Brush**—Trains for movement to Union Pacific Third Subdivision must receive Union Pacific clearance.

5. **Rule 99**—When flagging is required, distance will be 2 miles.

6. **Union**—The movement of eastward trains is governed by Union Pacific signal to main track and trains must stop before passing signal and must not proceed until switch is properly lined and signal indicates proceed.

Westward trains must stop clear of crossing to BN main track and must not proceed until switch is properly lined.

7. Stations authorized to duplicate train orders and train location line-ups mechanically: Sterling.

## COLORADO DIVISION

(Culbertson—Imperial)

### EIGHTH SUBDIVISION

1. **Speed Restrictions—** Maximum Speeds Permitted

Zone—Between	Freight
Culbertson and Imperial .....	25 MPH.
Engine or leading car over Arapahoe Street just west of depot Wauneta .....	10 MPH.
Enders over highway No. 6 crossing MP 41.7 .....	10 MPH.
Loaded tank cars .....	20 MPH.

2. **Bridge, Engine and Heavy Car Restrictions—**

Cars heavier than the following not permitted without authority of Superintendent:

40 feet or less in length .....	220,000 lbs.
Over 40 feet long .....	263,000 lbs.

Diesel units in Groups IX and X must not operate.

Between Culbertson and Imperial bridge derrick 975501 and 250-ton wrecking derrick must not operate.

3. **Train Register Exceptions—**None.

4. **Clearance Provisions and Exceptions Rule 83(B)—**

Culbertson, Imperial—Rule 83(B) does not apply.

5. **Rule 99**—Unless otherwise provided, protection against following trains is not necessary. When required to flag, distance will be 2 miles.

6. Lights on train order signals will not be displayed.

## COLORADO DIVISION

(Denver—Lyons)

### NINTH SUBDIVISION

1. **Speed Restrictions—** Maximum Speeds Permitted

Zone—Between	Freight
Broomfield and Longmont .....	25 MPH.
Longmont and Lyons .....	10 MPH.
Over C&S and BN crossing Longmont .....	10 MPH.
Loaded tank cars .....	20 MPH.
Derricks .....	10 MPH.

2. **Bridge, Engine and Heavy Car Restrictions—**

Cars heavier than the following not permitted without authority of Superintendent:

40 feet or less in length .....	220,000 lbs.
40 feet to 52.5 feet in length .....	263,000 lbs.

Diesel units in Groups IX and X must not operate between MP 45.5 and MP 48.6.

Bridge derrick 975501 and 250-ton wrecking derricks must not operate.

3. **Train Register Exceptions—**

Broomfield—Trains will register when directed by train order.

4. **Clearance Provisions and Exceptions Rule 83(B)—**

Longmont—Trains must receive clearance when operator on duty. Operator on duty Monday through Friday 7:00 a.m. until 11:00 p.m. Saturday and Sunday 7:00 a.m. until 3:00 p.m.

5. **Rule 99**—Unless otherwise provided, protection against following trains is not necessary. When required to flag, distance will be 1.5 miles.

6. Stations authorized to duplicate train orders and train location line-ups mechanically: 31st Street Denver.

## COLORADO DIVISION

(Hastings—Kearney)

### TENTH SUBDIVISION

Trains between Hastings and Kearney are governed by Rules for Employees of BN Operating on Union Pacific Trackage as contained in pamphlet dated June 1, 1979.

# ALLIANCE DIVISION

(Ravenna—Alliance)

## FIRST SUBDIVISION

1. **Speed Restrictions—** Maximum Speeds Permitted  

Zone—Between	Freight	
MP 127.7 and MP 128 .....	20 MPH.	
Head end of eastward trains passing signals at MP 128.4—		
Freight trains up to 100 Tons/OB .....	50 MPH.	
Freight trains over 100 Tons/OB .....	40 MPH.	
Head end of westward trains passing signal at MP 175.1—		
Freight trains up to 100 Tons/OB .....	55 MPH.	
Freight trains over 100 Tons/OB .....	45 MPH.	
Head end of train over highway crossing from Fifth Street at stock yards, to Fourteenth Street, first crossing west of depot Broken Bow .....		30 MPH.
MP 364.5 and 365.3 .....	25 MPH.	
MP 365.3 and MP 365.5 .....	20 MPH.	
Alliance Yard—Freight trains over 100 Tons/OB on main track, tracks 2 and 3 and South runaround track .....		10 MPH.
Alliance Yard—All other tracks .....		5 MPH.
Diesel units in Groups IX and X on controlled sidings at Hazard, Ansley, Merna, Anselmo, Linscott, Halsey, Thedford, Norway, Mullen, Hecla, Whitman, Ashby and Bingham .....		25 MPH.
Through turnouts of controlled sidings in CTC limits .....		25 MPH.
2. **Bridge, Engine and Heavy Car Restrictions—**  
Cars heavier than the following not permitted without authority of Superintendent:  

40 feet or less in length .....	220,000 lbs.
40 feet to 52.5 feet in length .....	263,000 lbs.
52.5 feet or longer .....	315,000 lbs.
3. **Train Register Exceptions—** None.
4. **Clearance Provisions and Exceptions Rule 83(B)—** None.  
At intermediate locations in CTC territory, Rule 83(B) will not apply when so authorized by train dispatcher.
5. **Rule 99—** When flagging is required, distance will be 1.5 miles.
6. Within CTC limits, trains finding a stop and proceed indication displayed by a signal, which governs facing point movement over a spring switch, will comply with Rule 104(H) and in addition a member of the crew will contact control operator by telephone, located adjacent to the spring switch, when such communication is available.  
  
In CTC territory whenever trailing movement through spring switch is not authorized by signal indication, the spring switch must be operated by hand. When any switching movements are made over spring switch, Rule 276 will apply as to permission, time and working limits and notification to engineer.  
  
In CTC territory if signal indicates Stop 501(K) governing movement over dual control switch one end of siding and such signal also governs movement over spring switch at the opposite end of siding, in addition to complying with Rule 275 for movement over dual control switch, and train is to trail over spring switch on the main track, a member of crew must examine switch and know that points fit.
7. Train location line-up not required between Ravenna and Alliance.

8. Stations authorized to duplicate train orders mechanically: Alliance and Ravenna.

# ALLIANCE DIVISION

(Alliance—Edgemont)

## SECOND SUBDIVISION

1. **Speed Restrictions—** Maximum Speeds Permitted  

Zone—Between	Freight	
<b>Between Alliance and Edgemont—</b>		
Freight trains over 100 Tons/OB .....	30 MPH.	
MP 365.5 and MP 366.1 .....	20 MPH.	
except will not exceed 10 MPH through turnouts.		
MP 393.6 and MP 396.2 .....	40 MPH.	
MP 396.2 and MP 409.0 .....	50 MPH.	
Through siding Belmont .....	25 MPH.	
MP 410.0 and MP 415.4 .....	20 MPH.	
MP 415.4 and MP 423.1, both tracks .....	25 MPH.	
Over C&NW crossing—Crawford .....	20 MPH.	
MP 440.3 and MP 442.5 .....	40 MPH.	
MP 442.5 and MP 445.8 .....	50 MPH.	
MP 466.4 and MP 469.4 .....	40 MPH.	
MP 469.4 and MP 475.7 .....	45 MPH.	
Through turnouts in CTC .....	35 MPH.	
Westward unit grain trains or trains handling C-6 hopper cars between MP 412.2 and Rutland .....		10 MPH.
Item 1A, All Subdivisions, applies MP 475.5 to MP 467.0 and MP 420 to MP 410.8 to eastward trains only.		
2. **Bridge, Engine and Heavy Car Restrictions—**  
Cars heavier than the following not permitted without authority of Superintendent:  

40 feet or less in length .....	220,000 lbs.
40 feet to 52.5 feet in length .....	263,000 lbs.
52.5 feet or longer .....	315,000 lbs.
3. **Train Register Exceptions—** None.
4. **Clearance Provisions and Exceptions Rule 83(B)—** None.  
At intermediate locations in CTC territory, Rule 83(B) will not apply when so authorized by train dispatcher.
5. **Rule 99—** When flagging is required, distance will be 1.5 miles.
6. **Crawford—**  
When making reverse movement over C&NW crossing, trainmen must operate push button on signal requested.
7. **Handling 80-Foot or Longer Cars—**  
(See Handling 80-Foot or Longer Cars, All Subdivisions.)

**Between Marsland and Crawford—**

Trains of 3850 or greater trailing tons must handle empty cars, 80 feet or longer, in the rear 3850 tons.

Trains of greater than 5900 trailing tons must handle loaded cars, 80 feet or longer, in the rear 5900 tons, except 80 feet and longer cars in excess of 100 gross tons will have no restriction on location in train.

When helper locomotives are used at rear of train, a buffer of at least 1600 tons must be provided to separate helper from the rear-most empty 80 feet or longer.

When helper locomotives are cut into train in accordance with Item 3A, All Subdivisions, and cuts exceed 3850 tons between lead locomotives and helper, or behind helper locomotives, empty cars 80 feet and longer must be in the last 3850 tons of such cuts.

Certain loaded cars 80 feet and longer must be regarded the same as an empty car. (See Item 4, All Subdivisions.)

**8. Trailing Tonnage Restrictions (See Items 3 and 3A, All Subdivisions)—****Between Marsland and Crawford—**

When all locomotive power is operated at head end of train, trailing tonnage must not exceed 6,700, except trains with head end power only, consisting entirely of cars equipped with Grade E steel couplers, must not exceed 11,000 trailing tons.

**9. Train location line-up not required between Alliance and Edgemont.****10. Stations authorized to duplicate train orders mechanically: Alliance and Edgemont.****ALLIANCE DIVISION**

(Edgemont—Gillette)

**THIRD SUBDIVISION**

<b>1. Speed Restrictions—</b>		Maximum Speeds Permitted
<b>Zone—Between</b>		<b>Freight</b>
Edgemont and Gillette .....		49 MPH.
Engine over highway crossing MP 476.5 .....		20 MPH.
Curves between MP 520.7 and MP 521 .....		30 MPH.
Curves between MP 534.8 and MP 535 .....		45 MPH.
Curves between MP 535.5 and MP 535.6 .....		45 MPH.
Curves between MP 536.2 and MP 536.6 .....		45 MPH.
Curves between MP 537.2 and MP 537.4 .....		45 MPH.
Curves between MP 538.7 and MP 539.5 .....		45 MPH.
<b>Between Edgemont and Gillette—</b>		
Freight trains over 100 Tons/OB. ....		30 MPH.
Through turnouts CTC .....		35 MPH.
Item 1A, All Subdivisions, applies MP 570.8 to MP 563.7 and MP 526.1 to MP 519.4 to eastward trains only.		

**2. Bridge, Engine and Heavy Car Restrictions—**

Cars heavier than the following not permitted without authority of Superintendent:

40 feet or less in length .....	220,000 lbs.
40 feet to 52.5 feet in length .....	263,000 lbs.
52.5 feet or longer .....	315,000 lbs.

**3. Train Register Exceptions—None.****4. Clearance Provisions and Exceptions Rule 83(B)—**

Campbell—Eastward trains entering Third Subdivision siding from Tenth Subdivision, Rule 83(B) will not apply and movement will be governed by verbal or written instructions of train dispatcher.

At intermediate locations in CTC territory, Rule 83(B) will not apply when so authorized by train dispatcher.

**5. Rule 99—When flagging is required, distance will be 2 miles.****6. Train location line-up not required between Edgemont and Donkey Creek.****7. Stations authorized to duplicate train orders and train location line-ups mechanically: Edgemont and Gillette.****ALLIANCE DIVISION**

(Edgemont—Deadwood)

**FOURTH SUBDIVISION**

<b>1. Speed Restrictions—</b>		Maximum Speeds Permitted
<b>Zone—Between</b>		<b>Freight</b>
Edgemont and Deadwood .....		25 MPH.
West leg of wye Deadwood Jct. ....		10 MPH.
On 3 percent descending grade .....		10 MPH.
Over Bridge 76.7 .....		10 MPH.
Yates spur MP 102.3 and Deadwood .....		10 MPH.
Loaded tank cars .....		25 MPH.
Kirk and Lead .....		10 MPH.
Item 1A, All Subdivisions, applies.		
<b>2. Bridge, Engine and Heavy Car Restrictions—</b>		
Cars heavier than the following not permitted without authority of Superintendent:		
40 feet or less in length .....	220,000 lbs.	
Over 40 feet long .....	263,000 lbs.	
Between Hill City and Deadwood, and Kirk and Lead maximum gross weight of cars must not exceed 220,000 pounds.		
Between Englewood and Deadwood bridge derrick 975501 and 250-ton wrecking derrick must not operate.		
Between Kirk and Lead derricks must not operate.		
Diesel units in Groups IX and X may be operated with not more than two units coupled, at authorized speed restrictions between Edgemont and Custer.		
Diesel engines, except diesel switch engines, must not operate on following tracks:		
<b>Yates—</b> From gate at east end of power plant trestle to end of track.		
<b>Deadwood—</b> Standard Oil track, Slime Plant track, Pioneer Fruit Co. track from west end of platform at fruit house to east switch, Armour spur, Continental Oil track.		
Only SW engine may operate between Kirk and Lead.		

**3. Train Register Exceptions—**

**Hill City and Kirk**—Extra trains will register when directed by train order.

**Hill City**—No. 856 and No. 857 will register when directed by train order.

**4. Clearance Provisions and Exceptions Rule 83(B)—**

Yard engine will not make opposing movement against No. 856 and 857 between Kirk and Deadwood without train order authority. Deadwood yard engine must receive clearance.

**5. Rule 99**—Unless otherwise provided protection against following trains is not necessary between Pringle and Kirk. When required to flag, distance will be: Ascending grade .5 mile, descending grade 1.5 miles.

**6. Track between Kirk and Lead** is considered industrial track, Rule 105 applies. Line-up received for Fourth Subdivision will cover.

**7. Hill City**—Between MP 60.4 and MP 60.7 and on both legs of the wye, also between Hill City and MP 4.4 on the Fifth Subdivision, a third rail is installed for the operation of narrow gauge trains of the Black Hills Central Railroad Company. A narrow gauge spur track is located north of main track, connecting to east leg of wye at Hill City. A narrow gauge wye is located at MP 4.4 on the Fifth Subdivision. Name of this station is Oblivion. All switches of the wye at Hill City are dual gauge. All switches whether standard, narrow or dual gauge must be lined and locked for normal position after each use.

**8. Tunnels MP 72.4, 73, 77 and 85.3** will not clear man on side of car. Employees must not ride on side of car when moving through these tunnels.

**9. Lights on train order signals** will not be displayed.

**10. Handling 80-Foot or Longer Cars—**

(See all subdivisions special instructions, Item 4.) Edgemont to Deadwood MP 5 through MP 107, Lead to Kirk MP 0.0 through MP 3.3.

**11. Rotary snowplows 205098 and 205099** operate at reduced speed Kirk to Lead and observe close clearance MP 1 to Rock Cut.

**12. Yard limits between Deadwood and Kirk** are operated as continuous yard.

**13. Stations authorized to duplicate train orders and train location line-ups mechanically:** Edgemont.

## ALLIANCE DIVISION

(Hill City—Keystone)

### FIFTH SUBDIVISION

**1. Speed Restrictions—**

Maximum Speeds Permitted

Zone—Between	Freight
Hill City and Keystone MP 8.8	15 MPH.
Derricks	10 MPH.

**2. Bridge, Engine and Heavy Car Restrictions—**

Cars heavier than the following not permitted without authority of Superintendent:

40 feet or less in length	220,000 lbs.
Over 40 feet long	263,000 lbs.
Bridge derrick 975501 and 250-ton wrecking derrick must not operate.	
Not more than one unit will be used between Hill City and Keystone.	

**3. Train Register Exceptions—None.**

**4. Clearance Provisions and Exceptions Rule 83(B)—None.**

**5. Rule 99**—Unless otherwise provided, protection against following trains is not necessary. When required to flag, distance will be: ascending grade .5 miles, descending grade 1.5 miles.

**6. Handling 80-Foot or Longer Cars—**

(See All Subdivisions Special Instructions, Item 4.) Hill City to Keystone MP 0.0 through MP 8.8.

## ALLIANCE DIVISION

(Bridger Jct.—Donkey Creek)

### SIXTH SUBDIVISION

**1. Speed Restrictions—**

Maximum Speeds Permitted

Zone—Between	Freight
MP 127.3 to MP 109.3	45 MPH.
MP 109.3 to MP 107.9	30 MPH.
MP 107.9 to MP 101.2	45 MPH.
MP 101.2 to MP 100	30 MPH.
MP 100 to MP 94.6	45 MPH.
MP 94.6 to MP 94.3	30 MPH.
MP 94.3 to MP 69.7	45 MPH.
MP 69.7 to MP 65.6	30 MPH.
MP 65.6 to MP 56.6	45 MPH.
MP 56.6 to MP 55.2	30 MPH.
MP 55.2 to MP 42.2	45 MPH.
Cordero Jct. and MP 42.2	49 MPH.
Except freight trains over 100 Tons/OB	45 MPH.
Speed around loop tracks Caballo, Belle Ayr and Cordero	10 MPH.
Donkey Creek and Cordero Jct.	40 MPH.
Except freight trains over 100 Tons/OB	30 MPH.
Through turnout Jct. switch Donkey Creek	10 MPH.

**2. Bridge, Engine and Heavy Car Restrictions—**

Cars heavier than the following not permitted without authority of Superintendent:

40 feet or less in length	220,000 lbs.
40 feet to 52.5 feet in length	263,000 lbs.
52.5 feet or longer	315,000 lbs.

**3. Train Register Exceptions—**

**Reno**—Trains will register when directed by train order.

4. **Clearance Provisions and Exceptions Rule 83(B)–**

**Reno**—Trains must receive clearance.

At intermediate locations in CTC territory, Rule 83(B) will not apply when so authorized by train dispatcher.

5. **Rule 99**—When flagging is required, distance will be: ascending grade 1 mile, descending grade 2 miles.

6. **Caballo**—

Hopper trains approaching Caballo mine will stop short of dirt crossing 500 feet east of silos. Permission must be received from mine personnel before proceeding.

A sign located 400 feet east of silos reads "Start of scale—2 MPH". A sign located 400 feet west of silos reads "End of scale—resume loop speed".

Trains will be directed by mine personnel as to loading speed. Trains will load clockwise.

Permission must be obtained from dispatcher before using switch at MP 14.5.

7. **Belle Ayr**—

Hopper trains approaching Belle Ayr Mine will stop short of Bishop road crossing approximately 40 car lengths east of scale until advised by mine the track scale is ready for operation.

All trains approaching Belle Ayr balloon tracks will weigh empties inbound and loads outbound on the weigh-in-motion scale at a speed not exceeding 4 MPH. Trains will be directed by mine personnel as to which track train will load on.

One signal pole with green, amber and red signal light is located at the scale house and will indicate as follows:

**Green Signal Light**—As train approaches indicates scales are calibrated and ready for weighing, to proceed. As train passes over scales a continuous green signal light indicates that train speed is 4 MPH or less.

**Amber Signal Light**—(when weighing only) indicates train speed has exceeded 4 MPH and speed should immediately be reduced to 4 MPH (signal then changes to green).

**Red Signal Light**—(when weighing only) indicates train has exceeded maximum permissible weighing speed of about 6 MPH. Train should stop and request instructions from the coal plant control room by radio.

**No Light at the Control Signal**—Indicates the scales have a malfunction and have not been automatically calibrated. Trains should request instructions by radio from coal plant control room before crossing scales.

Train speed while loading will be 0.5 MPH.

Empty hopper trains approaching Belle Ayr will be governed by instructions from mine as to whether loop track 1 or 2 will be used for loading. Signals governing loading do not apply on loop track No. 2. Trains must receive permission from coal plant control room before entering structure.

8. **Cordero**—

Empty hopper trains approaching Cordero Mine will stop short of scale until advised by mine personnel the track scale is ready for operation.

All trains approaching Cordero balloon tracks will weigh empties inbound and loads outbound on the weigh-in-motion scale at a speed not exceeding 3 MPH, loading counter clockwise.

Trains will be directed by mine personnel as to which loop track train will load and will load at 1 MPH.

## ALLIANCE DIVISION

(Alliance—Guernsey)

### SEVENTH SUBDIVISION

- | 1. <b>Speed Restrictions—</b>  | Maximum Speeds Permitted |
|--|--------------------------|
| <b>Zone—Between</b>  | <b>Freight</b>           |
| Alliance—Guernsey .....  | 49 MPH.                  |
| Alliance—South leg of wye .....  | 10 MPH.                  |
| Freight trains over 100 Tons/OB—   |                          |
| Angora and Northport .....   | 25 MPH.                  |
| Northport and Guernsey .....   | 30 MPH.                  |
| MP 1—Engine or leading car over highway crossing .....                       | 30 MPH.                  |
| Scottsbluff—Over Broadway crossing .....                                     | 20 MPH.                  |
| On Scottsbluff spur .....  | 15 MPH.                  |
| Northport—Through main track turnout north wye switch ...                    | 15 MPH.                  |
| West wye switch Northport—Through main track turnout west wye switch .....   | 15 MPH.                  |
| Guernsey—Main track movement through turnout west end of yard, MP 95.8 ..... | 15 MPH.                  |
2. **Bridge, Engine and Heavy Car Restrictions—**  
Cars heavier than the following not permitted without authority of Superintendent:
- |  |              |
|--|--------------|
| 40 feet or less in length .....                              | 220,000 lbs. |
| Over 40 feet long .....                                      | 263,000 lbs. |
| Except between Alliance and Northport 52.5 feet or longer .. | 315,000 lbs. |
- Diesel units in Groups IX and X must not operate on following tracks:
- |                                |   |
|--------------------------------|---|
| Bayard Factory Yard .....      | Pulp track                              |
| Scottsbluff Factory Yard ..... | Seed track beyond switch to No. 9 track |
|                                | Factory No. 1 track                     |
|                                | Rock and Syrup track                    |
|                                | Factory No. 6 track                     |
3. **Train Register Exceptions—**  
**West Wye Switch Northport**—Trains will register when directed by train order.
4. **Clearance Provisions and Exceptions Rule 83(B)–**None.
5. **Rule 99**—When flagging is required, between Alliance and Northport distance will be: ascending grade 1 mile, descending grade 2.5 miles; between Northport and Guernsey distance will be: ascending grade 1 mile, descending grade 1.5 miles.
6. **Bayard Sugar Factory**—Blue flag installed on dryer track 25 feet north of pellet shed. Blue flag will be displayed when the front end loader is working in the pellet shed or men are working in dryer pit. When blue flag is displayed, contact the machine operator in the pellet shed and/or dryer pit for removal.
7. **Mitchell**—Cars must not be moved beyond engine limit sign on sugar track serving Great Western Sugar Co.
8. Stations authorized to duplicate train orders and train location line-ups mechanically: Alliance.

# ALLIANCE DIVISION

(Guernsey — Casper)

## EIGHTH SUBDIVISION

1. **Speed Restrictions —** Maximum Speeds Permitted  

Zone — Between	Freight
Guernsey-Casper .....	49 MPH.
Guernsey and MP 115 .....	40 MPH.
MP 195 and Casper .....	40 MPH.
Tunnels between Guernsey and Wendover .....	25 MPH.
Curves between MP 107.3 and MP 109.6 .....	25 MPH.
MP 112.4 and MP 112.5 .....	15 MPH.
MP 114 and MP 115 .....	35 MPH.
MP 126.4 and MP 127.5 .....	35 MPH.
Westward freight trains between MP 196.8 and MP 197 .....	25 MPH.
2. **Bridge, Engine and Heavy Car Restrictions —**  
Cars heavier than the following not permitted without authority of Superintendent:  
40 feet or less in length ..... 220,000 lbs.  
Over 40 feet long ..... 263,000 lbs.
3. **Train Register Exceptions —**  
**Wendover, Orin** — Trains will register when directed by train order.
4. **Clearance Provisions and Exceptions Rule 83(B) —**  
**Wendover** — Clearance received at Cheyenne over signature of Chief Dispatcher at McCook authorizes movement Wendover to Guernsey on Eighth Subdivision of Alliance Division.  
At intermediate locations in CTC territory, Rule 83(B) will not apply when so authorized by train dispatcher.
5. **Rule 99** — When flagging is required, distance will be: ascending grade 1 mile, descending grade 2 miles.
6. Centralized Traffic Control in effect between MP 95.8 and MP 102.3.
7. **Dave** — Following Pacific Power tracks must not be used without authority of Chief Dispatcher: Track No. 1 beyond 1000 feet south of No. 1 track switch. Track No. 2 and Track No. 3 beyond switch to the South leg of wye. The south leg of wye.
8. **Casper** — Yard engines or leading car, must stop before crossing west Yellowstone Highway.  
Cars must not be left on track serving Black Hills Bentonite Company, MP 203.7, between main track switch and derail located 529 feet west of main track clearance point.
9. Stations authorized to duplicate train orders and train location line-ups mechanically: Casper.

# ALLIANCE DIVISION

(Northport — Sterling)

## NINTH SUBDIVISION

1. **Speed Restrictions —** Maximum Speeds Permitted  

Zone — Between	Freight
Northport and West switch of siding Bridgeport .....	45 MPH.
Freight trains over 100 Tons/OB Northport and West switch siding Bridgeport .....	25 MPH.
Diesel units in Groups IX and X between Northport and West switch of siding Bridgeport .....	40 MPH.
West switch of siding Bridgeport and MP 113.7 except loaded coal trains .....	49 MPH.
West switch of siding Bridgeport and MP 113.7 loaded coal trains .....	45 MPH.
Except Freight trains over 100 Tons/OB West switch Huntsman and MP 75 .....	25 MPH.

  
**Northport —**  
Engine or leading car of train between absolute signals at UP crossing ..... 20 MPH.  
Head end of eastward trains passing approach signal to interlocking UP crossing —  
Freight trains up to 100 Tons/OB ..... 25 MPH.  
Freight trains over 100 Tons/OB ..... 20 MPH.  
Engines or leading car over highway No. 26 and Broad Street crossings ..... 25 MPH.  
**Bridgeport —**  
Lyman Richey sand track ..... 10 MPH.  
Through main track turnouts west of depot and at east end of yard ..... 15 MPH.  
Between Sterling and Ackerman handling cars exceeding 263,000 pounds ..... 30 MPH.  
Item 1A, All Subdivisions, applies between MP 43 and MP 56 and between MP 76 and MP 81.3, westward trains only.
2. **Bridge, Engine and Heavy Car Restrictions —**  
Cars heavier than the following not permitted without authority of Superintendent:  
40 feet or less in length ..... 220,000 lbs.  
40 feet to 52.5 feet in length ..... 263,000 lbs.  
52.5 feet or longer ..... 315,000 lbs.  
**Bridgeport** — Not more than one diesel unit in Groups IX and X may operate on Lyman Richey sand track.
3. **Train Register Exceptions —**  
**Bridgeport** — Trains will register when directed by train order.
4. **Clearance Provisions and Exceptions Rule 83(B) —**  
**Northport** — Rule 83(B) does not apply.  
**Bridgeport** — Trains must receive clearance when operator on duty, operator on duty 7:00 a.m. until 4:00 p.m. Monday through Saturday.
5. **Rule 99** — When flagging is required, distance will be: ascending grade 1 mile, descending grade 2 miles.
6. Stations authorized to duplicate train orders and train location line-ups mechanically: Sterling.



## ALLIANCE DIVISION

(Campbell—Eagle Butte Jct.)

### TENTH SUBDIVISION

1. **Speed Restrictions—**

Zone—Between	Maximum Speeds Permitted Freight
Campbell and Eagle Butte Jct. ....	35 MPH.
Except freight trains over 100 Tons/OB .....	30 MPH.
MP 3 to Clovis Point .....	10 MPH.
Speed around loop tracks Rawhide .....	10 MPH.
Speed around loop tracks Eagle Butte .....	10 MPH.
2. **Bridge, Engine and Heavy Car Restrictions—**

Cars heavier than the following not permitted without authority of Superintendent:

40 feet or less in length .....	220,000 lbs.
40 feet to 52.5 feet in length .....	263,000 lbs.
52.5 feet or longer .....	315,000 lbs.
3. **Train Register Exceptions—**

**Campbell—**Trains will register when directed by train order.  
**Clovis Point Jct.—**Trains will register when directed by train order.  
**Eagle Butte Jct.—**Trains will register when directed by train order.
4. **Clearance Provisions and Exceptions Rule 83(B)—**None.  
At intermediate locations in CTC territory, Rule 83(B) will not apply when so authorized by train dispatcher.
5. **Rule 99—**When flagging is required, distance will be: ascending grade 1 mile, descending grade 2 miles.
6. **Tracks between Clovis Point Jct. and Clovis Point; Between Eagle Butte Jct. and Rawhide and Eagle Butte Jct. and Eagle Butte** is considered industrial track, Rule 105 applies.
7. **Clovis Point—**

Hopper trains approaching Clovis Point will stop at loop track switch and receive permission to proceed by radio from Mine personnel and will load clockwise.

Weigh-in and weigh-out speed 1½ MPH. Scales located 300 feet either side of load out hopper. Loading speed 3/10 MPH to start and then as directed by load out operator.
8. **Rawhide—**Hopper trains approaching Rawhide mine will stop short of inbound scale until permission and green signal received to proceed. All trains approaching Rawhide balloon track will weigh empties inbound and loads outbound on the weigh-in-motion scale at a speed not exceeding 2 MPH.

Loading speeds will be 0.8 to 1.0 MPH, and trains will load counter-clockwise.

Loading stations are air conditioned and stool provided for trainman. Hard hats will be provided by the mine and only trainman in silo will be required to wear same.

Transportation to silo for trainman will be provided by the mine whenever possible.
9. **Eagle Butte—**

All trains approaching silos will weigh empties inbound and loads outbound at speed not exceeding 3 MPH. Trains will load counter-clockwise. Weigh-in-motion scales located six car lengths either side of silos. Loading speeds to be directed by loadout operator.

## ALLIANCE DIVISION

(Black Thunder Jct.—Reno)

### ELEVENTH SUBDIVISION

1. **Speed Restrictions—**

Zone—Between	Maximum Speeds Permitted Freight
Black Thunder Jct. and Reno .....	35 MPH.
Speed around loop tracks Black Thunder and Jacobs Ranch ...	10 MPH.
2. **Bridge, Engine and Heavy Car Restrictions—**

Cars heavier than the following not permitted without authority of Superintendent:

40 feet or less in length .....	220,000 lbs.
40 feet to 52.5 feet in length .....	263,000 lbs.
52.5 feet or longer .....	315,000 lbs.
3. **Train Register Exceptions—**

**Black Thunder—**Trains will register when directed by train order.  
**Reno—**Trains will register when directed by train order.
4. **Clearance Provisions and Exceptions Rule 83(B)—**

**Reno—**Trains must receive clearance.

At intermediate locations in CTC territory, Rule 83(B) will not apply when so authorized by train dispatcher.
5. **Rule 99—**When flagging is required, distance will be: ascending grade 1 mile, descending grade 2 miles.
6. **Black Thunder—Jacobs Ranch—**

Hopper trains approaching mine will stop short of inbound scale until permission received to proceed.

All trains approaching Black Thunder and Jacobs Ranch will weigh empties inbound and loads outbound on the weigh-in-motion scale at a speed not exceeding 3 MPH. Trains will load counterclockwise. Loading speed will be 1 MPH.
7. **Between Black Thunder Jct. MP 3.0 and Jacobs Ranch MP 7.7 track** will be operated as one yard. Train and engine movements will be made under Rule 93.
8. **All trains before departing Jacobs Ranch and Black Thunder coal mines,** must make intermediate 500-mile train air brake inspection as prescribed by Rules 216, 217 (C3 and D3), 217 (F1 and F2) of Burlington Northern Air Brake and Train Handling Rules, Form 15338 11-76.

**RADIO INSTRUCTIONS****NEBRASKA DIVISION**

Base Station	Channel	Hours in Operation
Lincoln Disprs. Office	1	Continuous
<b>Wayside Stations</b>		
Forbes	1	Continuous
Forest City	1	Continuous
Falls City	1	Continuous
Phelps	1	Continuous
Hamburg	1	Continuous
Nebraska City	1	Continuous
Council Bluffs	1	Continuous
	2 yard forces	Continuous
Omaha	1	Continuous
Louisville	1	Continuous
Ashland	1	Continuous
Yutan	1	Continuous
Fremont	1	Continuous
Winslow	1	Continuous
Lyons	1	Continuous
Rosalie (Oakland)	1	8:00 am-5:00 pm Mon. thru Fri.
Walthill	1	Continuous
Osmond	1	8:00 am-5:00 pm Mon. thru Fri.
Havelock	1	Continuous
Lincoln Ydmaster (Penthouse)	1	Continuous
	2 yard forces	Continuous
Lincoln Rip Track	1	Continuous
	2 yard forces	Continuous
Lincoln Diesel Clerk	1	Continuous
	2 yard forces	Continuous
Lincoln Frt Pit Foreman	1	Continuous
Lincoln Carling Tower	1	Continuous
	2 yard forces	Continuous
Lincoln Ydmaster Lower Yard	1	Continuous
	2 yard forces	Continuous
Lincoln Baird Tower	1	Continuous
	2 yard forces	Continuous
Crete	1	Continuous
Friend	1	Continuous
Fairmont	1	7:00 am-11:00 pm Mon. thru Fri.
	2 train crews and DSA	Continuous
Sutton	1	Continuous
Hastings	1	Continuous
Tecumseh	1	7:00 am-4:00 pm Mon. thru Fri.
Wymore	1	7:00 am-11:00 pm Mon. thru Fri.
Superior	1	7:00 am-4:00 pm Mon. thru Fri.
Geneva	1	8:00 am-5:00 pm Mon. thru Fri.
Shickley	1	8:00 am-5:00 pm Mon. thru Fri.
	2 DSA	
Blue Hill	1	7:00 am-4:00 pm Mon. thru Fri.
	2 DSA	
Seward	1	Continuous
York	1	Continuous
Aurora	1	Continuous
Cushing (Central City)	1	8:00 am-5:00 pm Mon. thru Fri.
	2 DSA	
Loop City	1	7:00 am-4:00 pm Mon. thru Fri.

Grand Island	1	Continuous
Ravenna	1	Continuous
Firth	1	Continuous
Tablerock	1	Continuous

**RADIO INSTRUCTIONS****ALLIANCE DIVISION**

Base Station	Channel	Hours in Operation
Alliance Disprs. Office	1	Continuous
<b>Wayside Stations</b>		
Mason	1	Continuous
Broken Bow	1	Continuous
Anselmo	1	Continuous
Halsey	1	Continuous
Seneca	1	Continuous
Whitman	1	Continuous
Bingham	1	Continuous
Lakeside	1	Continuous
Alliance Yard	1	Continuous
Belmont	1	Continuous
Crawford	1	Continuous
Edgemont	1	Continuous
Newcastle	1	Continuous
Upton	1	Continuous
Gillette	1	Continuous
Cordero Mine	1	Continuous
Angora	1	Continuous
Scottsbluff	1	Continuous
Torrington	1	Continuous
Guernsey	1	Continuous
Glendo	1	Continuous
Douglas	1	Continuous
Casper	1	Continuous

**RADIO INSTRUCTIONS****COLORADO DIVISION**

Base Station	Channel	Hours in Operation
McCook Disprs. Office	1	Continuous
<b>Wayside Stations</b>		
Minden	1	Continuous
Holdrege	1	Continuous
Grant	1	8:00 am-4:30 pm Tue. thru Sat.
	2 DSA	
Orleans	1	8:00 am-4:30 pm Mon. thru Fri.
Oxford	1	Continuous
Cambridge	1	Continuous
Trenton	1	Continuous
Benkleman	1	Continuous
Haigler	1	Continuous
Wray	1	Continuous
Yuma	1	Continuous
Akron	1	Continuous
Brush	1	Continuous
Fort Morgan	1	8:00 am-4:30 pm Tue. thru Sat.
Wiggins	1	Continuous
Keenesburg	1	Continuous
Barr Lake	1	Continuous
Denver	1	Continuous
	2 yard forces	